
Micropython-Stubber

Release 1.11.1

Jos Verlinde

Dec 18, 2022

CONTENTS:

1	Boost MicroPython productivity in VSCode	1
1.1	Licensing	2
2	Approach to collecting stub information	3
2.1	Stub collection process	4
2.2	Firmware Stubs format and limitations	4
2.3	Stub naming convention	4
3	stubber	7
3.1	build	7
3.2	clone	8
3.3	enrich	8
3.4	get-core	9
3.5	get-docstubs	9
3.6	get-frozen	10
3.7	get-lobo	10
3.8	merge	11
3.9	minify	11
3.10	publish	12
3.11	show-config	13
3.12	stub	13
3.13	switch	13
3.14	update-fallback	14
3.15	update-module-list	14
4	Using stubs	15
4.1	Manual configuration	15
4.2	using micropython-stubber	15
4.3	Using micropy-cli	15
5	VSCode and Pylint configuration	17
5.1	Recommended order of the stubs in your config:	17
5.2	Relevant VSCode settings	17
5.3	pylint	19
5.4	Microsoft Python Language Server settings - Deprecated	19
6	Create Firmware Stubs	21
6.1	Running the script	21
6.2	Generating Stubs for a specific Firmware	22
6.3	Downloading the files	22
6.4	Custom firmware	22

6.5	The Unstubbables	23
7	createtestub variants	25
7.1	board/createtestubs.py	25
7.2	board/createtestubs_mem.py	25
7.3	Optimisations	26
8	CPython and Frozen modules	27
8.1	Frozen Modules	27
8.2	Collect Frozen Stubs (micropython)	27
8.3	Postprocessing	28
9	Documentation Stubs	29
9.1	What / Why	29
9.2	How docstubs are generated	29
10	Repo structure	33
10.1	This and sister repos	33
10.2	Structure of this repo	33
10.3	Naming Convention and Stub folder structure	34
10.4	Create a symbolic link	34
11	PowerShell Scripts	37
11.1	bulk_stubber.ps1	37
12	Overview of Stubs	39
12.1	Firmware and libraries	39
12.2	Included custom stubs	39
13	References	41
13.1	Inspiration	41
13.2	Documentation on Type hints	42
14	Documentation	43
15	Changelog	45
16	V1.6.9	47
17	v1.6.8	49
18	v1.6.7	51
19	v1.6.6	53
20	v1.6.4	55
20.1	Tests	55
20.2	Configuration	55
20.3	stubber cli	55
20.4	common:	56
20.5	Github Actions	56
21	v1.6.3 minor cleanups	57
21.1	cli:	57
21.2	Tests	57
21.3	Developing:	57

22 v1.6.0	59
23 Naming convention	61
23.1 stubber cli	61
23.2 config	62
23.3 common:	62
23.4 firmware stubber	62
23.5 Documentation	62
23.6 Github Actions:	62
24 Use Poetry	63
24.1 Dependencies	63
24.2 documentation	63
24.3 docstubs:	63
24.4 scripts:	64
24.5 Common	64
24.6 Validation	64
24.7 Github Actions:	64
24.8 Developing:	65
24.9 Tests	65
25 createsubs v1.5.4	67
25.1 Change naming convention:	67
25.2 stubber cli	67
25.3 Common	68
25.4 scripts	68
25.5 Firmware stubber	69
25.6 Dependencies	69
25.7 Documentation	69
25.8 validation	69
25.9 BugFixes:	70
25.10 Github Actions:	70
25.11 Scripts:	70
25.12 code quality:	70
25.13 Tests	70
26 improve docstubs	73
26.1 common:	73
27 Tests	75
27.1 minify:	75
27.2 createstubs:	76
27.3 Github Actions:	76
27.4 Docs:	76
27.5 Other :	76
28 createstubs: v1.5.1	77
28.1 Documentation Stubs	77
28.2 createstubs.py - v1.4.3	77
28.3 createstubs.py - v1.4.2	77
28.4 minified createstubs.py - v1.4.1	77
28.5 documentation	78
28.6 createstubs - v1.4-beta	78
28.7 createstubs.py - v1.3.16	78

29 TO-DO (provisional)	81
30 Upstream Documentation	83
30.1 ifconfig	83
30.2 ap.config	83
30.3 write_pulses	83
30.4 working on it	84
31 Developing	85
31.1 Cloning the repo	85
31.2 Windows 10	85
31.3 Github codespaces	85
31.4 Wrestling with two pythons	86
31.5 Minification	86
31.6 Testing	86
31.7 Debugging Cpython code that run Micropython	87
31.8 github actions	88
32 Testing	89
32.1 testing & debugging createstubs.py	89
32.2 platform detection	89
32.3 Code Coverage	90
33 API Reference	91
33.1 createstubs	91
33.2 createstubs_db	94
33.3 createstubs_mem	97
33.4 stub_lvgl	100
33.5 stubber	100
34 Indices and tables	171
Python Module Index	173
Index	175

CHAPTER
ONE

BOOST MICROPYTHON PRODUCTIVITY IN VS CODE

The intellisense and code linting that is so prevalent in modern editors, does not work out-of-the-gate for MicroPython projects. While the language is Python, the modules used are different from CPython , and also different ports have different modules and classes , or the same class with different parameters.

Writing MicroPython code in a modern editor should not need to involve keeping a browser open to check for the exact parameters to read a sensor, light-up a led or send a network request.

Fortunately with some additional configuration and data, it is possible to make the editors understand your flavor of MicroPython. even if you run a on-off custom firmware version.

In order to achieve this a few things are needed:

- 1) Stub files for the native / enabled modules in the firmware using PEP 484 Type Hints
- 2) Specific configuration of the VSCode Python extensions
- 3) Specific configuration of Pylint
- 4) Suppression of warnings that collide with the MicroPython principals or code optimization.

With that in place, VSCode will understand MicroPython for the most part, and help you to write code, and catch more errors before deploying it to your board.

Note that the above is not limited to VSCode and pylint, but it happens to be the combination that I use.

A lot of subs have already been generated and are shared on github or other means, so it is quite likely that you can just grab a copy to be productive in a few minutes.

For now you will need to *configure this by hand*, or use the *micropy cli tool*

1. The sister-repo [**MicroPython-stubs**][stubs-repo] contains [all stubs][all-stubs] I have collected with the help of others, and which can be used directly. That repo also contains examples configuration files that can be easily adopted to your setup.
2. A second repo [**micropy-stubs** repo][stubs-repo2] maintained by BradenM, also contains stubs but in a structure used and distributed by the *micropy-cli* tool. you should use micropy-cli to consume stubs in this repo.

The (stretch) goal is to create a VSCode add-in to simplify the configuration, and allow easy switching between different firmwares and versions.

1.1 Licensing

MicroPython-Stubber is licensed under the MIT license, and all contributions should follow this [LICENSE](#).

CHAPTER TWO


APPROACH TO COLLECTING STUB INFORMATION

The stubs are used by 3 components.

1. the VSCode Pylance Language Server
2. the VSCode Python add-in
3. a linter such as pylint

These 3 tools work together to provide code completion/prediction, type checking and all the other good things. For this the order in which these tools use, the stub folders is significant, and best results are when all use the same order.

In most cases the best results are achieved by the below setup:

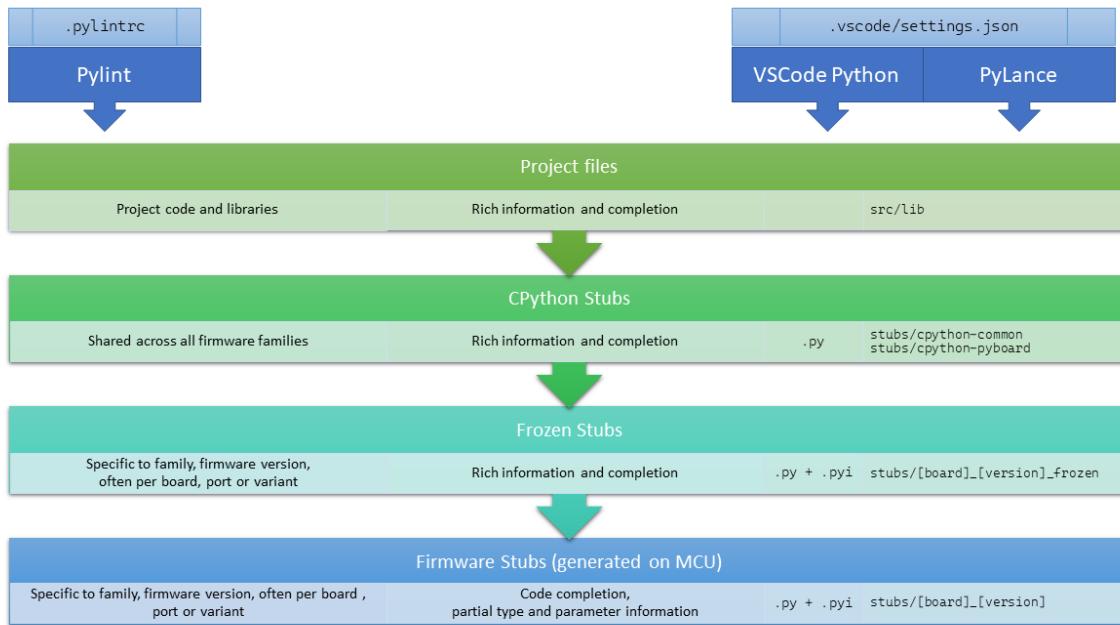

1. **Your own source files**, including any libraries you add to your project. This can be a single libs folder or multiple directories. There is no need to run stubber on your source or libraries.
2. **The CPython common stubs**. These stubs are handcrafted to allow MicroPython script to run on a CPython system. There are only a limited number of these stubs and while they are not intended to be used to provide type hints, they do provide valuable information. Note that for some modules (such as the `gc`, `time` and `sys` modules) this approach does not work.

3. **Frozen stubs.** Most micropython firmwares include a number of python modules that have been included in the firmware as frozen modules in order to take up less memory. These modules have been extracted from the source code.
4. **Firmware Stubs.** For all other modules that are included on the board, [micropython-stubber] or [micropy-cl] has been used to extract as much information as available, and provide that as stubs. While there is a lot of relevant and useful information for code completion, it does unfortunately not provide all details regarding parameters that the above options may provide.

2.1 Stub collection process

- The **CPython common stubs** are periodically collected from the [micropython-lib][] or the [pycopy-lib][].
- The **Frozen stubs** are collected from the repos of [micropython][] + [micropython-lib][] and from the [loboris][] repo the methods to gather these differs per firmware family , and there are differences between versions how these are stored , and retrieved. where possible this is done per port and board, or if not possible the common configuration for has been included.
- the **Firmware stubs** are generated directly on a MicroPython board.

2.2 Firmware Stubs format and limitations

1. No function parameters are generated
2. No return types are generated
3. Instances of imported classes have no type (due to 2)
4. The stubs use the .py extension rather than .pyi (for autocomplete to work)
5. Due to the method of generation nested modules are included, rather than referenced. While this leads to somewhat larger stubs, this should not be limiting for using the stubs on a PC.

2.3 Stub naming convention

The firmware naming conventions is most relevant to provide clear folder names when selecting which stubs to use.

for stubfiles: **{firmware family}-{version}-{port}**

for frozen modules : **{firmware}-{version}-frozen{port}{board}**

- **firmware family:** lowercase
 - micropython | loboris | pycopy | ...
- **port:** lowercase , as reported by os.implementation.platform
 - stm32 | esp32 | linux | win32 | rp2 | samd | ...
- **board:** used mainly for frozen stubs
 - GENERIC | RELEASE | UM_TINYPICO | GENERIC_512K | ARDUINO_NANO_RP2040_CONNECT | ...

Note: RELEASE appears to be used mainly for CI/CD purposes and is not commonly used on hardware.

- **version :** digits only , dots replaced by underscore, follow version in documentation rather than semver

- v1_13
- v1_9_4
- **build**, only for nightly build, the build nr. extracted from the git tag
 - * Nothing , for released versions
 - * 103
 - * Latest

STUBBER

```
stubber [OPTIONS] COMMAND1 [ARGS]... [COMMAND2 [ARGS]...]...
```

Options

--version

Show the version and exit.

-v, --verbose

-v for DEBUG

3.1 build

Commandline interface to publish stubs.

```
stubber build [OPTIONS]
```

Options

--family <family>

Default

micropython

-V, --version, --Version <versions>

multiple:

Default

1.19.1

-p, --port <ports>

multiple:

Default

auto

-b, --board <boards>

multiple:

Default

GENERIC

--clean

clean folders after processing and publishing

3.2 clone

Clone/fetch the micropython repos locally.

The local repos are used to generate frozen-stubs and doc-stubs.

```
stubber clone [OPTIONS]
```

Options

-p, --path <path>

--add-stubs, --no-stubs

Also clone the micropython-stubs repo

3.3 enrich

Enrich the stubs in stub_folder with the docstubs in docstubs_folder.

```
stubber enrich [OPTIONS]
```

Options

-s, --stubs <stubs_folder>

folder containing the firmware stubs to be updated

Default

repos/micropython-stubs/stubs

-ds, --docstubs <docstubs_folder>

folder containing the docstubs to be applied

Default

repos/micropython-stubs/stubs

--diff

Show diff

Default

False

--dry-run

Dry run does not write the files back

Default

False

3.4 get-core

Download core CPython stubs from PyPi.

Get the core (CPython compat) modules for both MicroPython and Pycopy.

```
stubber get-core [OPTIONS]
```

Options

-stubs, --stub-folder <stub_folder>

Default

repos/micropython-stubs/stubs

--pyi, --no-pyi

Create .pyi files for the (new) frozen modules

Default

True

--black, --no-black

Run black on the (new) frozen modules

Default

True

3.5 get-docstubs

Build stubs from documentation.

Read the Micropython library documentation files and use them to build stubs that can be used for static typechecking.

```
stubber get-docstubs [OPTIONS]
```

Options

-p, --path <path>

Default

repos

--stub-path, --stub-folder <target>

Destination of the files to be generated.

Default

repos/micropython-stubs/stubs

-f, --family <basename>

Micropython family.

Default

micropython

-b, --black, -nb, --no-black

Run black

Default

True

3.6 get-frozen

Get the frozen stubs for MicroPython.

Get the frozen modules for the checked out version of MicroPython

```
stubber get-frozen [OPTIONS]
```

Options

-stubs, --stub-folder <stub_folder>

Default

repos/micropython-stubs/stubs

--version, --tag <version>

Version number to use. [default: Git tag]

--pyi, --no-pyi

Create .pyi files for the (new) frozen modules

Default

True

--black, --no-black

Run black on the (new) frozen modules

Default

True

3.7 get-lobo

Get the frozen stubs for Lobo-esp32.

```
stubber get-lobo [OPTIONS]
```

Options

-stubs, --stub-folder <stub_folder>

Default

repos/micropython-stubs/stubs

--pyi, --no-pyi

Create .pyi files for the (new) frozen modules

Default

True

--black, --no-black

Run black on the (new) frozen modules

Default

True

3.8 merge

Enrich the stubs in stub_folder with the docstubs in docstubs_folder.

```
stubber merge [OPTIONS]
```

Options

--family <family>**Default**

micropython

-v, --version, --Version <versions>

'latest', 'auto', or one or more versions

Default

auto

3.9 minify

Minify createstubs*.py.

Creates a minified version of the SOURCE micropython file in TARGET (file or folder). The goal is to use less memory / not to run out of memory, while generating Firmware stubs.

```
stubber minify [OPTIONS]
```

Options

-s, --source <source>**Default**

board/createtubs.py

-t, --target <target>**Default**

./minified

-d, --diff

Show the functional changes made to the source script.

-c, -xc, --compile

Cross compile after minification.

-a, --all

Minify all variants (normal, _mem and _db).

--report, --no-report

Keep or disable minimal progress reporting in the minified version.

Default

True

3.10 publish

Commandline interface to publish stubs.

```
stubber publish [OPTIONS]
```

Options

--family <family>

Default

micropython

-V, --version, --Version <versions>

multiple:

Default

1.19.1

-p, --port <ports>

multiple:

Default

auto

-b, --board <boards>

multiple:

Default

GENERIC

--pypi, --test-pypi

publish to PYPI or Test-PYPI

Default

False

--dry-run

go though the motions but do not publish

--force

create new post release even if no changes detected

--clean

clean folders after processing and publishing

3.11 show-config

Show the current configuration

```
stubber show-config [OPTIONS]
```

3.12 stub

Create or update .pyi type hint files.

```
stubber stub [OPTIONS]
```

Options

-s, --source <source>

3.13 switch

Switch to a specific version of the micropython repos.

Specify the version of the MicroPython repo. use of the –tag or –version is deprecated

The Micropython-lib repo will be checked out to a commit that corresponds in time to that version tag, in order to allow non-current versions to be stubbed correctly.

The repos must be cloned already

```
stubber switch [OPTIONS] [[v1.9.3|v1.9.4|latest]]
```

Options

-p, --path <path>

Arguments

TAG

Optional argument

3.14 update-fallback

Update the fallback stubs.

The fallback stubs are updated/collated from files of the firmware-stubs, doc-stubs and core-stubs.

```
stubber update-fallback [OPTIONS]
```

Options

--version <version>

Version number to use

Default

v1_18

--stub-folder <stub_folder>

Destination of the files to be generated.

Default

repos/micropython-stubs/stubs

3.15 update-module-list

Update the module list based on the information in the data folder

```
stubber update-module-list [OPTIONS]
```

USING STUBS

4.1 Manual configuration

The manual configuration, including sample configuration files is described in detail in the sister-repo [micropython-stubs][][] section [using-the-stubs][][]

4.2 using micropython-stubber

You can install micropython stubber from PyPi using `pip install micropython-stubber`.

4.3 Using micropy-clι

‘micropy-clι’ is command line tool for managing MicroPython projects with VSCode If you want a command line interface to setup a new project and configure the settings as described above for you, then take a look at : [micropy-clι]

```
pip install micropy-clι
micropy init
```

Braden has essentially created a front-end for using micropython-stubber, and the configuration of a project folder for pymakr.

micropy-clι maintains its own repository of stubs.

VS CODE AND PYLINT CONFIGURATION

The current configuration section describes how to use [Pylance].

Pylance leverages type stubs (.pyi files) and lazy type inferencing to provide a highly-performant development experience. Pylance supercharges your Python IntelliSense experience with rich type information, helping you write better code, faster.

The Pylance extension is also shipped with a collection of type stubs for popular modules to provide fast and accurate auto-completions and type checking.

Some sections may still refer to the use of [Microsoft Python Language Server][mpls], which has been deprecated.

5.1 Recommended order of the stubs in your config:

1. The src/libs folder(s)
2. The CPython common modules
3. The frozen modules offer more information that can be used in code completion, and therefore should be loaded before the firmware stubs.
4. The firmware stubs generated on or for your board

Announcing Pylance: Fast, feature-rich language support for Python in Visual Studio Code | Python (microsoft.com)

5.2 Relevant VSCode settings

Setting	De-fault	Description	ref
python.autoComplete.extraPaths	[]	Specifies locations of additional packages for which to load autocomplete data.	Autocomplete Settings
typeshedPaths	[]	Specifies paths to local typeshed repository clone(s) for the Python language server.	Git
python.linting.			Linting Settings
enabled	true	Specifies whether to enable linting in general.	
pylintEnabled	true	Specifies whether to enable Pylint.	

5.2.1 Pylance - pyright

[Pylance]([Pylance - Visual Studio Marketplace](#)) is replacing MPLS and provides the same and more functionality.

Setting	De-default	Description
python.analysis.stubPaths	Path	Used to allow a user to specify a path to a directory that contains custom type stubs. Each package's type stub file(s) are expected to be in its own subdirectory.
python.analysis.autoSearchPaths	False	Used to automatically add search paths based on some predefined names (like src).
python.analysis.extraPaths		Used to specify extra search paths for import resolution. This replaces the old python.analysis.autoComplete.extraPaths setting.

5.2.2 Sample configuration for Pylance

To update a project configuration from MPLS to Pylance is simple :

Open your VSCode settings file : .vscode/settings.json

- change the language server to Pylance "python.languageServer": "Pylance",
- remove the section: python.autoComplete.typeshedPaths
- remove the section : python.analysis.typeshedPaths
- optionally add : "python.analysis.autoSearchPath": true,

The result should be something like this :

```
{
    "python.languageServer": "Pylance",
    "python.analysis.autoSearchPath": true,
    "python.autoComplete.extraPaths": [
        "src/lib",
        "all-stubs/cpython_patch",
        "all-stubs/mpy_1_13-nightly_frozen/esp32/Generic",
        "all-stubs/esp32_1_13_0-103",
    ]
    "python.linting.enabled": true,
    "python.linting pylintEnabled": true,
}
```

If you notice problems :

- The paths are case sensitive (which may not be apparent for your platform)
- To allow the config to be used cross platform you can use forward slashes /, *note that this is also accepted on Windows*
- If you prefer to use a backslash : in JSON notation the \ (backslash) MUST be escaped as \\ (double backslash)
- Remember to put the 'Frozen' module paths before the generated module paths.

References :

[Pylance - Visual Studio Marketplace](#)

[microsoft/pyright: Static type checker for Python \(github.com\)](#)

possible testing / diag :

pyright/command-line.md at microsoft/pyright (github.com)

5.3 pylint

Pylint needs 2 settings :

1. Specify **init-hook** to inform pylint where the stubs are stored. note that the `src` folder is already automagically included, so you do not need to add that.
2. disable some pesky warnings that make no sense for MicroPython, and that are caused by the stubs that have only limited information

File: `.pylintrc`

```
[MASTER]
# Loaded Stubs: esp32-micropython-1.11.0
init-hook='import sys;sys.path[1:1] = ["src/lib", "all-stubs/cpython-core", "all-stubs/
˓→mpy_1_12/frozen/esp32/GENERIC", "all-stubs/esp32_1_13_0-103",]''

disable = missing-docstring, line-too-long, trailing-newlines, broad-except, logging-
˓→format-interpolation, invalid-name,
      no-method-argument, assignment-from-no-return, too-many-function-args,_
˓→unexpected-keyword-arg
      # the 2nd line deals with the limited information in the generated stubs.
```

5.4 Microsoft Python Language Server settings - Deprecated

MPLS is being replaced by Pylance , and the below configuration is for reference only .

The language server settings apply when `python.jediEnabled` is false.

Setting	Default	Description	ref
<code>python.jediEnabled</code>	<code>true</code> , must be set to <code>FALSE</code>	Indicates whether to use Jedi as the IntelliSense engine (true) or the Microsoft Python Language Server (false). Note that the language server requires a platform that supports .NET Core 2.1 or newer.	
<code>python.analysis.</code>			code analysis settings)
<code>type-shed-Paths</code>	<code>[]</code>	Paths to look for typeshed modules on GitHub.	

Our long-term plan is to transition our Microsoft Python Language Server users over to Pylance and eventually deprecate and remove the old language server as a supported option

CREATE FIRMWARE STUBS

It is possible to create MicroPython stubs using the `createtubs.py` MicroPython script.

the script goes through the following stages

1. it determines the firmware family, the version and the port of the device, and based on that information it creates a firmware identifier (fwid) in the format : {family}-{port}-{version} the fwid is used to name the folder that stores the stubs for that device.
 - `stubs/micropython-v1_10-stm32`
 - `stubs/micropython-v1_12-esp32`
 - `stubs/loboris-v3_2_4-esp32`
2. it cleans the stub folder
3. it generates stubs, using a predetermined list of module names. for each found module or submodule a stub file is written to the device and progress is output to the console/repl.
4. a module manifest (`modules.json`) is created that contains the pertinent information determined from the board, the version of `createtubs.py` and a list of the successful generated stubs

Module duplication

Due to the module naming convention in micropython some modules will be duplicated , ie `uos` and `os` will both be included

6.1 Running the script

The `createtubs.py` script can either be run as a script or imported as a module depending on your preferences.

Running as a script is used on the linux or win32 platforms in order to pass a `-path` parameter to the script.

The steps are :

1. Connect to your board
2. Upload the script(s) to your board. All variants of the script are located in the `/board` folder of this repo
3. Run/import the `createtubs.py` script
4. Download the generated stubs to a folder on your PC
5. run the post-processor [optional, but recommended]

`![createtubs-flow][]`

Note: There is a memory allocation bug in MicroPython 1.30 that prevents `createtubs.py` to work. this was fixed in nightly build v1.13-103 and newer.

If you try to create stubs on this defective version, the stubber will raise *NotImplementedError*("MicroPython 1.13.0 cannot be stubbed")

6.2 Generating Stubs for a specific Firmware

The stub files are generated on a MicroPython board by running the script `createstubs.py`, this will generate the stubs on the board and store them, either on flash or on the SD card. If your firmware does not include the logging module, you will need to upload this to your board, or use the minified version.

```
import createstubs
```

The generation will take a few minutes (2-5 minutes) depending on the speed of the board and the number of included modules.

As the stubs are generated on the board, and as MicroPython is highly optimized to deal with the scarce resources, this unfortunately does mean that the stubs lacks parameters details. So for these you must still use the documentation provided for that firmware.

6.3 Downloading the files

After the sub files have been generated , you will need to download the generated stubs from the micropython board and most likely you will want to copy and save them on a folder on your computer. if you work with multiple firmwares, ports or version it is simple to keep the stub files in a common folder as the firmware id is used to generate unique names

- ./stubs
 - /micropython-v1_10-stm32
 - /micropython-v1_12-esp32
 - /micropython-v1_11-linux
 - /loboris-v3_1_20-esp32
 - /loboris-v3_2_24-esp32

6.4 Custom firmware

The script tries to determine a firmware ID and version from the information provided in `sys.implementation` , `sys.uname()` and the existence of specific modules..

This firmware ID is used in the stubs , and in the folder name to store the subs.

If you need, or prefer, to specify a firmware ID you can do so by setting the `firmware_id` variable before importing `createstubs` For this you will need to edit the `createstubs.py` file.

The recommendation is to keep the firmware id short, and add a version as in the below example.

```
# almost at the end of the file
def main():
    stubber = Stubber(firmware_id='HoverBot v1.2.1')
    # Add specific additional modules to be stubbed
```

(continues on next page)

(continued from previous page)

```
stubber.add_modules(['hover', 'rudder'])
```

after this , upload the file and import it to generate the stubs using your custom firmware id.

6.5 The Unstubbables

There are a limited number of modules that cannot be stubbed by `createstubs.py` for a number of different reasons. Some simply raise errors , others may reboot the MCU, or require a specific configuration or state before they are loaded.

a few of the frozen modules are just included as a sample rather than would not be very useful to generate stubs for these the problematic category throw errors or lock up the stubbing process altogether:

```
self.problematic=["upysh","webrepl_setup","http_client","http_client_ssl","http_server",
                  "http_server_ssl"]
```

The excluded category provides no relevant stub information

```
self.excluded=["webrepl","_webrepl","port_diag","example_sub_led.py","example_pub_
button.py"]
```

`createstubs.py` will not process a module in either category.

Note: that some of these modules are also included in the frozen modules that are gathered for those ports or boards. For those modules it makes sense to use/prioritize the .pyi stubs for the frozen modules over the firmware stubs.

CREATESTUB VARIANTS

There are two variant of the script available, in 3 levels of optimisation:

variant	full documented script	minified script (no logging)	cross-compiled script
full version	board/createstubs.py	minified/createstubs.py	minified/createstubs.mpy
memory optimized	board/createstubs_mem.py	mini-fied/createstubs_mem.py	mini-fied/createstubs_mem.mpy

In all cases the generation will take a few minutes (2-5 minutes) depending on the speed of the board and the number of included modules. As the stubs are generated on the board, and as MicroPython is highly optimized to deal with the scarce resources, this unfortunately does mean that the stubs lacks parameters details. So for these you must still use the documentation provided for that firmware.

7.1 board/createstubs.py

this is the core version of the script, and is fully self contained, but includes logging with requires the logging module to be avaialble on your device If your firmware does not include the logging module, you will need to upload this to your board, or use the minified version.

```
import createstubs
```

7.2 board/createstubs_mem.py

This variant of the createstubs.py script is optimised for use on low-memory devices, and reads the list of modules from a text file, rather than including it in the source file. as a result this requires an additional file `./modulelist.txt`, that should be uploaded to the device. If that cannot be found then only a single module (micropython) is stubbed.

```
import createstubs_mem
```

7.3 Optimisations

In order to run this on low-memory devices two additional steps are recommended:

- Minification, using python-minifier to reduce overall size, and remove logging overhead. can be used on all devices
- Cross compilation, using mpy-cross, to avoid the compilation step on the micropython device. The cross-compiled version can only run on specific Micropython 1.12 or newer.

7.3.1 Minification

Minified versions, which requires less memory and only very basic logging. this removes the requirement for the logging module on the MCU.

Minification helps reduce the size of the script, and therefore of the memory usage. As a result the script becomes almost unreadable.

7.3.2 Cross compilation

this is specially suited for low memory devices such as the esp8622

CPYTHON AND FROZEN MODULES

8.1 Frozen Modules

It is common for Firmwares to include a few (or many) python modules as ‘frozen’ modules. ‘Freezing’ modules is a way to pre-process .py modules so they’re ‘baked-in’ to MicroPython’s firmware and use less memory. Once the code is frozen it can be quickly loaded and interpreted by MicroPython without as much memory and processing time.

Most OSS firmwares store these frozen modules as part of their repository, which allows us to:

1. Download the *.py from the (github) repo using `git clone` or a direct download
2. Extract and store the ‘unfrozen’ modules (ie the *.py files) in a _Frozen folder. if there are different port / boards or releases defined , there may be multiple folders such as:
 - stubs/micropython_1_12_frozen
 - /esp32
 - * /GENERIC
 - * /RELEASE
 - * /TINYPICO
 - /stm32
 - * /GENERIC
 - * /PYBD_SF2
 - 3. generate typeshed stubs of these files. (the .pyi files will be stored alongside the .py files)
 - 4. Include/use them in the configuration

ref: <https://learn.adafruit.com/micropython-basics-loading-modules/frozen-modules>

8.2 Collect Frozen Stubs (micropython)

This is run daily though the github action workflow : get-all-frozen in the micropython-stubs repo.

If you want to run this manually

- Check out repos side-by-side:
 - micropython-stubs
 - micropython-stubber
 - micropython

- micropython-lib
- link repos using all_stubs symlink
- checkout tag / version in the micropython folder
(for most accurate results should checkout micropython-lib for the same date)
- run `get-frozen`
- run `update_stub`
- create a PR for changes to the stubs repo

8.3 Postprocessing

You can run postprocessing for all stubs by running either of the two scripts. There is an optional parameter to specify the location of the stub folder. The default path is `./all_stubs`

```
update_stubs [./mystubs]
```

This will generate or update the `.pyi` stubs for all new (and existing) stubs in the `./all_stubs` or specified folder.

From version ‘1.3.8’ the `.pyi` stubs are generated using `stubgen`, before that the `make_stub_files.py` script was used.

`Stubgen` is run on each ‘collected stub folder’ (that contains a `modules.json` manifest) using the options :
`--ignore-errors --include-private` and the resulting `.pyi` files are stored in the same folder (`foo.py` and `foo.pyi` are stored next to each other).

In some cases `stubgen` detects duplicate modules in a ‘collected stub folder’, and subsequently does not generate any stubs for any `.py` module or script. then **Plan B** is to run `stubgen` for each separate `*.py` file in that folder. While this is significantly slower and according to the `stubgen` documentation the resulting stubs may of lesser quality, but that is better than no stubs at all.

Note: In several cases `stubgen` creates folders in inappropriate locations (reason undetermined), which would cause issues when re-running `stubgen` at a later time. to compensate for this behaviour the known-incorrect `.pyi` files are removed before and after `stubgen` is run see: `cleanup(modules_folder)` in `utils.py`

DOCUMENTATION STUBS

9.1 What / Why

Advantages : they bring the richness of the MicroPython documentation to Pylance. This includes function and method parameters and descriptions, the module and class constants for all documented library modules.

9.2 How docstubs are generated

The documentation stubs are generated using `src/stubs_from_docs.py`

- 1) Read the MicroPython library documentation files and use them to build stubs that can be used for static type-checking using a custom-built parser to read and process the micropython RST files
 - This will generate :
 - Python modules (<module.py>), one for each <module>.rst file
 - * The module docstring is based on the module header in the .rst file
 - Function definitions
 - * Function parameters and types based on documentation As the parameter documentaion is sometimes rather abigious or imprecise, the parameters definitives are cleaned up based on a hand tuned algoritm
 - * The function docstring is based on the function description in the .rst file
 - * The return type of a function is based on phrases used in the documentation, with an override table for functions with insufficient documented information to determine the return type.
 - Classes
 - * The class docstring is based on the Class description in the .rst file
 - * **init** method
 - The init parameters are based on the documentation for the class As the parameter documentaion is sometimes rather abigious or imprecise, the parameters definitives are cleaned up based on a hand tuned algoritm
 - **init** docstring is based on the Class description in the .rst file
 - * Methods
 - Method parameters and types based are based on the documentation in the .rst file As the parameter documentaion is sometimes rather abigious or imprecise, the parameters definitives are cleaned up based on a hand tuned algoritm

- The method docstring is based on the method description in the .rst file
 - The return type of a method is based on phrases used in the documentation, with an override table for functions with insufficient documented information to determine the return type.
 - Method decorators `@classmethod` and `@staticmethod` are generated based on the use of `py:staticmethod` or `py:classmethod` in the documentation. ref: <https://sphinx-tutorial.readthedocs.io/cheatsheet/>
 - Method parameter names `self` and `cls` are used accordingly.
- Exceptions

9.2.1 Return types

- Tries to determine the return type by parsing the docstring.
 - Imperative verbs used in docstrings have a strong correlation to return -> None
 - Recognizes documented Generators, Iterators, Callable
 - Coroutines are identified based tag “This is a Coroutine”. Then if the return type was Foo, it will be transformed to : Coroutine[`Foo`]
 - A static Lookup list is used for a few methods/functions for which the return type cannot be determined from the docstring.
 - add `NoReturn` to a few functions that never return (`stop` / `deepsleep` / `reset`)
 - if no type can be detected the type `Any` is used

9.2.2 Lookup tables :

- `src/rst/lookup.py`
 - `LOOKUP_LIST`
 - * contains return types for functions and methods
 - * “`module.[class.].function`” : (“`type`”, `probability`)
 - `NONE_VERBS`
 - * if no type has been determined, and the docstring starts with one of these verbs, then assume the return type is `None`
 - `MODULE_GLUE`
 - * Add additional imports to some modules to allow one module to import other supporting modules
 - * currently only used for `lcd160cr` and `esp32`
 - `PARAM_FIXES`
 - * manual fixes needed for parameters (micropython v.16 & v1.17)
 - * used to clean up the parameter strings before further interpretation using search and replace
 - `CHILD_PARENT_CLASS`
 - * List of classes and their parent classes that should be added to the class definition. The documentation contains no clear references of the parent classes so these can only be added based on a (manual) lookup table

- * Note: The parent class **Exceptions** is determined based on the rst hint `py:exception` and the Class Name.

9.2.3 Code Formatting

The generated stub files (.py) are formatted using `black` and checked for validity using `pyright`

Note: `black` on python 3.7 does not like some function defs, this is not treated as an error. `def sizeof(struct, layout_type=NATIVE, /) -> int:`

9.2.4 Ordering of inter-dependent classes in the same module

Classes are frequently documented in a different order than they need to be declared in a source file. To accommodate for this the source code is re-ordered to avoid forward references in the code. the coode for this is located in

- `src/rst/classsort.py`
- `src/rst/output_dict.py`

9.2.5 Add GLUE imports to allow specific modules to import specific others.

This is based on the `MODULE_GLUE` table to support some modules that need to import other modules or classes.

9.2.6 Literals / constants

```
- documentation contains repeated vars with the same indentation
- Module level:
.. code-block::

    .. data:: IPPROTO_UDP
               IPPROTO_TCP

- class level:
.. code-block::

    .. data:: Pin.IRQ_FALLING
              Pin.IRQ_RISING
              Pin.IRQ_LOW_LEVEL
              Pin.IRQ_HIGH_LEVEL

                Selects the IRQ trigger type.

- literals documented using a wildcard are added as comments only
```

- Repeats of definitions in the rst file for similar functions or literals
 - `CONSTANTS` (module and Class level)
 - functions
 - methods

REPO STRUCTURE

- *This and sister repos*
- *Structure of this repo*
- *Naming Convention and Stub folder structure*
- 2 python versions

10.1 This and sister repos

repo	Why	Where	example
micropython-stubber	needed to make stubs	in your source folder	develop/micropython-stubber
micropython-stubs	stores collected stubs	next to the stubber	develop/micropython-stubs

Note:

- recommended is to create a symlink from develop/micropython-stubber\all-stubs to develop/micropython-stubs
-

10.2 Structure of this repo

The file structure is based on my personal windows environment, but you should be able to adapt that without much hardship to your own preference and OS.

What	Details	Where
stub root	symlink to connect the 2 sister-repos	all_stubs
firmware stubber	MicroPython	board/createtestubs.py
minified firmware stubber	MicroPython	minified/createtestubs.py
PC based scripts	CPython	src/*
PC based scripts	CPython	process.py
pytest tests		test/*

10.3 Naming Convention and Stub folder structure

What	Why	Where
stub root	connect the 2 repos	all_stubs
cpython stubs for micropython core	adapt for differences between CPython and MicroPython	stubs/cpython-core
generated stub files	needed to use stubs	stubs/{ firmware}-{ port}-{ version}-frozen
Frozen stub files	better code intellisense	stubs/{ firmware}-{ version}-frozen

Note: I found that, for me, using submodules caused more problems than it solved. So instead I link the two main repo's using a [symlink](#).

```
cd /develop

git clone https://github.com/josverl/micropython-stubber.git
git clone https://github.com/josverl/micropython-stubs.git

cd micropython-stubber
poetry install

stubber clone
```

10.4 Create a symbolic link

To create the symbolic link to the `../micropython-stubs/stubs` folder the instructions differ slightly for each OS/ The below examples assume that the `micropython-stubs` repo is cloned 'next-to' your project folder. please adjust as needed.

10.4.1 Windows 10

Requires Developer enabled or elevated powershell prompt.

```
# target must be an absolute path, resolve path is used to resolve the relative path to
# absolute
New-Item -ItemType SymbolicLink -Path "all-stubs" -Target (Resolve-Path -Path ../
micropython-stubs/stubs)
```

or use `mklink` in an (elevated) command prompt

```
rem target must be an absolute path
mklink /d all-stubs c:\develop\micropython-stubs\stubs
```

10.4.2 Linux/Unix/Mac OS

```
# target must be an absolute path  
ln -s /path/to/micropython-stubs/stubs all-stubs
```


POWERSHELL SCRIPTS

A number of scripts have been written in PowerShell as that is one of my preferred scripting languages. Possibly these scripts could be ported to python , at the cost of more complex handling of OS processes and paths and ports.

(a PR with a port to Python would be appreciated)

11.1 bulk_stubber.ps1

The goal of this script is to run create_stubs on a set of boards connected to my machine in order to generate new stubs for multiple micropython versions

high level operation:

- Scans the serial ports for connected esp32 and esp8266 devices using `get-serialport.ps1 -chip`
- Uses a (hardcoded) list of firmwares including version + chip type
- for each firmware in that list:
 - Selects the corresponding device and serialport
 - Flashes the micropython version to the device using `flash_MPY.ps1`
 - waits for the device to finish processing any initial tasks (file system creation etc)

```
rshell -p $serialport --rts 1 repl "~ print('connected') ~"
```

Note: This is quite sensitive to timing and requires some delays to allow the device to restart before the script continues.

Also a bit of automated manipulation of the RTS (and DTR) signals is needed to avoid needing to press a device's reset button.

- Starts the minified version of `createtstubs.py`

```
$createtstubs_py = join-path $WSRoot "minified/createtstubs.py"  
pyboard --device $serialport $createtstubs_py | write-host
```

- Downloads the generated machine-stubs

```
# reverse sync  
# $dest = path relative to current directory  
# $source = path on board ( all boards are called pyboard)
```

(continues on next page)

(continued from previous page)

```
$source = "/pyboard/stubs"  
rshell -p $serialport --buffer-size 512 rsync $source $subfolder | write-host
```

11.1.1 Minification and compilation

in order to allow `createstubs` to be run on low-memory devices there are a few steps needed to allow for sufficient memory

11.1.2 Requirements & dependencies

Python

- esptool - to flash new firmware to the esp32 and esp8266
- pyboard.py - to upload files and run commands (not the old version on PyPi)
- rshell - to download the folder with stubs

PowerShell/Firmware

- get-serialport.ps1
- flash_MPY.ps1

11.1.3 Hardware

- ESP32 board + SPIRAM on USB + Serial drivers
- ESP8266 board on USB + Serial drivers

Note: Multiple boards can be connected at the same time. The script will select the first board of the corresponding type. If a board-type is not present, then no stubs for that device type will be generated.

CHAPTER
TWELVE

OVERVIEW OF STUBS

Initially I also stored all the generated subs in the same repo. That turned out to be a bit of a hassle and since then I have moved [all the stubs](#) to the [micropython-stubs](#) repo

Below are the most relevant stub sources referenced in this project.

12.1 Firmware and libraries

12.1.1 MicroPython firmware and frozen modules [[MIT](#)]

<https://github.com/micropython/micropython>

<https://github.com/micropython/micropython-lib>

12.1.2 Pycopy firmware and frozen modules [[MIT](#)]

<https://github.com/pfalcon/pycopy>

<https://github.com/pfalcon/pycopy-lib>

12.1.3 LoBoris ESP32 firmware and frozen modules [[MIT](#), [Apache 2](#)]

https://github.com/loboris/MicroPython_ESP32_psRAM_LoBo

12.2 Included custom stubs

Github repo	Contributions	License
pfalcon/micropython-lib	CPython backports	MIT
dastultz/micropython-pyb	a pyb.py file for use with IDEs in developing a project for the Pyboard	Apache 2

12.2.1 Stub source: MicroPython-lib > CPython backports [*MIT, Python*]

While micropython-lib focuses on MicroPython, sometimes it may be beneficial to run MicroPython code using CPython, e.g. to use code coverage, debugging, etc. tools available for it. To facilitate such usage, micropython-lib also provides re-implementations (“backports”) of MicroPython modules which run on CPython.
<https://github.com/pfalcon/micropython-lib#cpython-backports>

12.2.2 micropython_pyb [*Apache 2*]

This project provides a pyb.py file for use with IDEs in developing a project for the Pyboard.
<https://github.com/dastultz/micropython-pyb>

REFERENCES

13.1 Inspiration

13.1.1 Thonny - MicroPython _cmd_dump_api_info [*MIT License*]

The `creatstubs.py` script to create the stubs is based on the work of Aivar Annamaa and the Thonny crew. It is somewhere deep in the code and is apparently only used during the development cycle but it showed a way how to extract/generate a representation of the MicroPython modules written in C

While the concepts remain, the code has been rewritten to run on a micropython board, rather than on a connected PC running CPython. Please refer to : [Thonny code sample](#)

13.1.2 MyPy Stubgen

MyPy stubgen is used to generate stubs for the frozen modules and for the *.py stubs that were generated on a board.

13.1.3 make_stub_files [*Public Domain*]

<https://github.com/edreamleo/make-stub-files>

This script `make_stub_files.py` makes a stub (.pyi) file in the output directory for each source file listed on the command line (wildcard file names are supported).

The script does no type inference. Instead, the user supplies patterns in a configuration file. The script matches these patterns to: The names of arguments in functions and methods and The text of return expressions. Return expressions are the actual text of whatever follows the “return” keyword. The script removes all comments in return expressions and converts all strings to “str”. This preprocessing greatly simplifies pattern matching.

Note: It was found that the stubs / prototypes of some functions with complex arguments were not handled correctly, resulting in incorrectly formatted stubs (.pyi)

Therefore this functionality has been replaced by MyPy stubgen

13.2 Documentation on Type hints

- Type hints cheat sheet
- PEP 3107 – Function Annotations
- PEP 484 – Type Hints
- Optional Static Typing for Python
- TypeShed
- SO question

CHAPTER
FOURTEEN

DOCUMENTATION

This documentation is built using [Sphinxs](#) with the bulk of the documents written in markdown and hosted on read the docs.

The markdown files are processed using [Myst](#)

Some diagrams have been generated using [Mermaid](#) and integrated using the Mermaid plugin

Documentation for the scripts is created using the Spinxs [AutoApi](#) plugin

**CHAPTER
FIFTEEN**

CHANGELOG

CHAPTER
SIXTEEN

V1.6.9

- update board stubber to report pyboards as port=stm32
- update filestructure to reflect this change in naming

CHAPTER
SEVENTEEN

V1.6.8

- fix: `stubber docstubs` failed on methods and function definitions that were split across multiple lines.
- fix: `stubber clone` must fetch and pull to get updates from upstream repos

CHAPTER
EIGHTEEN

V1.6.7

- fix: correct dependencies

CHAPTER
NINETEEN

V1.6.6

- fix: allow switch to micropython 1.9.x versions

V1.6.4

- unified different scripts into a single CLI tool
- replace submodules with `stubber clone` command

20.1 Tests

- add more clone test variants
- fix incorrect mock
- add minify mock tests
- change coverage reporting to codecov only

20.2 Configuration

- add configuration option via in `pyproject.toml`
- use `config.stub_path` for all-stubs
- use typed config
- use configured repo path everywhere

20.3 stubber cli

- `usr -t` for `-tag`
- make `VERSION_LIST` robust
- gracefully handle get tags from non-existant folder
- use dynamic version list
- add git switch

20.4 common:

- basicgit: accept Paths
- add checkout version, refactor config and version
- refactor postprocessing

20.5 Github Actions

wf: run stubber clone before tests

V1.6.3 MINOR CLEANUPS

21.1 cli:

- improve help
- add update-fallback to cli
- update toml with config
- refactor functions from cli to utils
- refactor utils
- use repo path
- default clone to repos folder
- add version and logging control
- change cmd init to clone

21.2 Tests

- testspace: change codecov report type
- refactor and improve tests & mocks

21.3 Developing:

devcontainer: add git graph extension

CHAPTER
TWENTYTWO

V1.6.0

CHAPTER
TWENTYTHREE

NAMING CONVENTION

- use {family}-v{version}-{port} notation across all scripts and tools
- updated documentation accordingly
- single function to handle version names in various formats (clean_version)
- requirements: pin dependencies to avoid differences when running across multiple machines.
- get_mpy_frozen:
 - refactor module
 - checkout the matching commit of micropython-lib without this it is not possible to build stubs older versions due to a restructure of micropython-lib
- bulk_stubber:
 - make more robust by including dependencies in the project.
 - detect pyboard based on USB VID & PID
 - prep autostubber for pybv11
- manifest.json generation
 - improve core manifest.json information
 - improve support for grouping and sorting

23.1 stubber cli:

- add init test & refector imports
- fix tests
- merge docstubs into stubber
- reduce tests
- merge get-all-stubs into stubber
- merge get_all_stubs into stubber
- add init
- add stub and some tests
- refactor minify and add -all option

23.2 config

- change to use module tomllib(b)

23.3 common:

- update pyright config to reduce noise

23.4 firmware stubber

fw-stubber: clean up excepts

23.5 Documentation

docs: fix tomlib docs: document the CLI for stubber using sphinx-click
readme: add badges for pypi and codecov doc
updates fix docbuild for poetry update totdos in source

docstubs: fix json import fix: black formatting across platforms

add settings and script for coverage reporting update snippets (origin/dev/snippets) snippets:add checks

Develop: fix: codespace poetry setup

#test test: fix fewer arguments tests: add firmware stubber version tests test: add missing toml test: add package ==
version == firmware stubber version tests test: basicgit - add mocktest git test: fix minify test remove unused imports

23.6 Github Actions:

wf: use poetry run and poetry install

pkg: updates to support poetry wf: poetry install verbose pkg: update actions to work with poetry pkg: Move all
stubber files into module folder pkg: get version from poetry package pkg: move csv into package config: remove
pylance config from vscode settings pkg: add data files

CHAPTER
TWENTYFOUR

USE POETRY

24.1 Dependencies

- bump distro from 1.6.0 to 1.7.0
- bump pytest from 6.2.5 to 7.0.1
- bump myst-parser from 0.16.1 to 0.17.0
- bump coverage from 6.3 to 6.3.1
- bump black from 21.12b0 to 22.1.0
- bump libcst from 0.3.23 to 0.4.1
- bump pytest-mock from 3.6.1 to 3.7.0
- bump mpy-cross from 1.17 to 1.18

24.2 documentation

- Add notes to docstrings/descriptions
- (bluetooth_constants) doc: configure submodules
- docs: add open in VSCode banner
- textual and updates to version notation
- Update 40_firmware_stubs.md

24.3 docstubs:

- fix optional - Optional Parameters are not treated as optional <https://github.com/Josverl/micropython-stubber/issues/183>
- add docstubs validation
- skip 3 stubs.
- create umodules <https://github.com/Josverl/micropython-stubber/issues/176>
- align to micropython PR and update tests
- workaround for re.Match and smarter tests

- fix module & Class constant handling & tests
- Add = ... to module and class level constants to avoid errors when they are used as a default value in function or method

24.4 scripts:

- script update_modulelist, - write updates to: - board/modulelist.txt - board/createsubs.py
- bulk_stubber: Copy generated/firmwarestubs to all-stubs/* use firmware-stubs path for temp storage
- Update BulkStubber & getserial for esp32, esp8266 and stm32
- minify.ps1: posix paths
- bulkstubber: more versions

24.5 Common

- improve black formatting for subfolders
- utils: do not use BaseException
- config: pycache
- data: add firmware modules
- Multi-root with mpy-stdlib based on pico-go
- utils.stubgen: re-apply refactor to avoid use of os.cmd or subprocess.run
- utils.stubgen: refactor to avoid use of os.cmd or subprocess.run

24.6 Validation

- add snippets to test mpy stdlib
- validation: Add more snippets
- update validation snippets
- WS with pyright snippets

24.7 Github Actions:

- wf: do not run minified tests twice, minify all

24.8 Developing:

devcontainer: also init git submodules devcontainer: change python setup

24.9 Tests

test: fix test_socket _class test: fix return type and test deepsleep test: skip test_createstubs on windows + python 3.7
test: native test on windows, include db test on linux test: add createstubs_db on all platforms test: lower threshold to 25
stubs test: add native integration test for micropython_mem test: linux rest on ubuntu and debian, separate branch / fail
logic in docstubs test test: add additional firmwares test: waste less time in by reducing test size test: remove path test
debug: fix debug config for tests debug: add missing debug property test: fix pessimistic test and make more robust

CHAPTER
TWENTYFIVE

CREATESUBS V1.5.4

Better exceptions fix missed updates to mem and stub variants

25.1 Change naming convention:

- board: user {family}-v{version}-{port} notation
- change name of master branch to main

25.2 stubber cli

- fix: - rp2.PIO.irq
- fix dequeue
- revert re.match change
- fixup re.match
- add fixes for remaining Documentation errors
- generate Exception Classes
- fix test and default for machine.Pin.**init**
- fix 3 Non-default argument follows default argument errors
- run pyflake to remove unused imports
- fix black parameters
- no need to redefine Exception
- use ‘Latest’ as a version tag for the most recent master
- use v for version

25.3 Common

- pyright: restore exec environments test & board
- get_frozen: improve force **init.py**
- get_frozen: run black on new/updated stubs
- createsubs: support for RP2 , and accept kwargs for methods and functions
- lobo: skip some modules
- get_mpy: match_lib - add v1.18 rename to .csv
- version: latest
- basicgit: remove debugging code
- basicgit: fix gettag ‘latest’
- bulk_stubber: make more robust by adding the dependencies to the repo
- get_frozen: clean collected modules - freeze to empty directory - block CI/CD manifest
- get_mpy: for frozen modules: checkout the matching commit of micropython-lib
- mpy_frozen: refactor module
- process: –source allows scriptname to be specified & add mpy-cross step
- update_pyi : rename and more efficient updating find .pyi` s created in the wrong location and move them
- Manifest: release is optional
- use **version** and bump version
- get_mpy: improve porcessing of frozen modules V1.16 and newer
- schema: change subtype property
- Module manifest: Sorting and add port name
- update get-frozen
- improve frozen manifest processing (#88)
- utils: update clean version
- createsubs* : Add subtype to manifest - remove redundant try/catch
- process.py: cleanup unused variables
- process.py: use click

25.4 scripts

- add scripts to simplify copy and updates
- Merge generate stubs from documentation

25.5 Firmware stubber

- createstubs: sample bootfile works on pyb & esp
- createstubs: get_root can detect /sd cards

25.6 Dependencies

- python requirements: pin versions
- bump coverage from 6.2 to 6.3
- bump sphinx from 4.3.2 to 4.4.0
- add autoflake
- bump mpy-cross from 1.16 to 1.17
- bump myst-parser from 0.15.2 to 0.16.1
- bump mypy from 0.930 to 0.931
- bump sphinx from 4.3.1 to 4.3.2
- bump rshell from 0.0.30 to 0.0.31

25.7 Documentation

- docs: update naming convention
- fix stuborder image
- Update 10_approach.md
- Naming convention
- one less
- add branch rename instructions
- documented Docs to Stubs process

25.8 validation

- basic setup for stub validation
- add code snippets for validation

25.9 BugFixes:

- fix: ensure that `from __future__ ...` is at start
- add .pyi stubs for umqtt.robust Workaround for missing `init.py` in source
- fix: allow stubgen of async yield in stub (python 3.6) closes #137
- fix Exception lineskip
- fix: `get_mpy` - save&resore cwd
- fix lobotest to match reduced modules
- Fix core module sort order closes #68

25.10 Github Actions:

- wf test: ensure artefact upload on error
- wf: report coverage
- testspace: use folders
- pytest: upload to testspace
- wf: allign naming

25.11 Scripts:

- prep autostubber for pybv11
- detect pyboard

25.12 code quality:

- fix warnings
- improve core manifest.json

25.13 Tests

- test: fix testregression for latest version
- tests: docstubs improve test of class documented as function
- testspace script
- test: add mpy-cross test and split to seperate folder
- improve grouping
- pytest - use matrix.os in test results
- test: do not run pytest-cov

- tests: drop utf-8 encoding
- test : init logging
- test : fix path
- test: stabilize pyright & black detection
- tests: skip basicgit tests
- add integration tests for cmdline

CHAPTER
TWENTYSIX

IMPROVE DOCSTUBS

- rst: cleaner import though use of **all**
- document: debug subProcess
- docstubs: fix random.choice(): Any
- docstubs: workaround black on Py3.7

26.1 common:

- add header to modulelist
- devcontainer: simpler requirements
- utils: fix generating .pyi files from .py files with errors
- fix: remove duplication fix minor issues
- github: group logging

CHAPTER
TWENTYSEVEN

TESTS

- pin python version
- pytest: add test markers
- change ubuntu version detection to codename
- add mark.minified to linux tests add new platform markers
- implement workaround for failing minified tests
- tests: restructure board test to share testdata
- add debug config
- tests: fix minified tests
- tests: improve & merge testing
- test: linux detection++
- tests: use pathlib and fix paths
- clarify intentional error
- remove duplicate tests
- tests: Restucture Micropython on Cpython tests
- tests: resolve issues due to sloppy imports in tests
- stubgen test : add logging for python 3.7

27.1 minify:

- minify all variants
- also remove _log * lines
- also: minimize createstubs_mem.py
- Fix: remove duplicate builtins from minified
- minify : fix mpy-cross on Python 3.7

27.2 `createstubs`:

- add normal and mem_constrained versions
- add database variant
- Save state to database and reboot on memory error
- reduce complexity from createstubs to save ram possibly loosing some edge cases ++ docs
- update to handle multi-file uploads to overcome esp8266 memory constraints
- both normal and db work on esp8266 (report not done)
- keep `get_root` and `_info` to allow for testing
- update tests to clean-up `sys.path` after the tests
- keep **version** in minified
- use **version** move unneeded import of machine
- gracefully handle missing `modules.txt`
- stubber: fix firmwareid for mpy esp8266
- stub_lvg: fix **version**

27.3 Github Actions:

- use posix path
- workflow: test : on checkout fetch all branches and tags

27.4 Docs:

- do not keep generated API Docs
- refactor documentation to more docs
- add explanation on memory optimization.
- add cloning of submodules
- safer path insertion

27.5 Other :

- add `remote_stubber` script
- `bulk_stubber`: run black formatter after all downloads
- `remote_stubber`: improve reporting
- `bulk stubber`: make esp8266 work more reliable ESP32 WIP - scripts fail to upload

CHAPTER
TWENTYEIGHT

CREATESTUBS: V1.5.1

- `get_root` can detect `/sd` cards
 - sample bootfile works on `pyb1.1`, `esp323`, `esp8266`

28.1 Documentation Stubs

- avoid the use of `BaseException`

28.2 `createtubs.py` - v1.4.3

- significant memory optimisation for use on low-memory devices such as the esp8266 family
 - load the list of modules to be stubbed from a text file rather than as part of the source
 - use both minification and the `mpy-cross` compiler to reduce the claim on memory (RAM)

Warning: This is a potential breaking change for external tools that expect to either directly execute the script or upload only a single file to an MCU in order to stub.

- the current process is automated in `'remote_stubber.ps1'`

28.3 `createtubs.py` - v1.4.2

- Fixes a regression introduced in 1.4-beta where function definitions would include a `self` parameter.

28.4 `minified createtubs.py` - v1.4.1

- Switched to use `python-minifier` for the minification due to the end-of-life of the previous minification tool. The new minification tool produces more compact code, although that is still not sufficient for some memory constrained devices.
 - there are no functional changes,
 - the detection of MicroPython was adjusted to avoid the use of `eval` which blocked a minification rule
 - several tests were adjusted

28.5 documentation

- Add Sphinxs documentation
 - changelog
 - automatic API documentation for
 - * `createtubs.py` (board)
 - * scripts to run on PC / Github actions
- Publish documentation to readthedocs

28.6 `createtubs` - v1.4-beta

- `createtubs.py`
 - improvements to handle nested classes to be able to create stubs for lvgl. this should also benefit other more complex modules.
- added `stub_lvgl.py` helper script

28.7 `createtubs.py` - v1.3.16

- `createtubs.py`
 - fix for micropython v1.16
 - skip `_test` modules in module list
 - black formatting
 - addition of `init` methods (based on runtime / static)
 - class method decorator
 - additional type information for constants using comment style typing
 - detect if running on MicroPython or CPython
 - improve report formatting to list each module on a separate line to allow for better comparison
- workflows
 - move to ubuntu 20.04
 - * move to test/tools/ubuntu_20_04/micropython_v1.xx
 - run more tests in GHA
- postprocessing
 - minification adjusted to work with `black`
 - use `mypy.stubgen`
 - run per folder
 - * verify 1:1 relation .py-.pyi
 - * run `mypy.stubgen` to generate missing .pyi files

- publish test results to GH
- develop / repo setup
 - updated dev requirements (requirements-dev.txt)
 - enable developing on [GitHub codespaces](#)
 - switched to using submodules to remove external dependencies how to clone : `git submodule init git submodule update`
 - added black configuration file to avoid running black on minified version
 - switched to using .venv on all platforms
 - added and improved tests
 - * test coverage increased to 82%
 - move to test/tools/ubuntu_20_04/micropython_v1.xx
 - * for test (git workflows)
 - * for tasks
 - make use of CPYTHON stubs to alle makestubs to run well on CPYTHON
 - * allows pytest, and debugging of tests
 - add tasks to :
 - * run createstubs in linux version

CHAPTER
TWENTYNINE

TO-DO (PROVISIONAL)

UPSTREAM DOCUMENTATION

in docstubs:

30.1 ifconfig

in order to accept `ifconfig()` without any parameters from `: configtuple: Optional[Any]` to `: configtuple: Optional[Tuple] = None`

30.2 ap.config

from: `def config(self, param) -> Any:` to: `def config(self, param:str=""", **kwargs) -> Any:`

30.3 write_pulses

Argument of type “`Literal[0]`” cannot be assigned to parameter “`data`” of type “`bool`” in function “`write_pulses`” “`Literal[0]`” is incompatible with “`bool`”

from: `def write_pulses(self, duration, data=True) -> Any:` to: `def write_pulses(self, duration:Union[List, Tuple], data:int=1) -> None:`

or even better an overload

```
@overload
def write_pulses(self, duration:Union[List, Tuple], data:int=1) -> None:
    ...
@overload
def write_pulses(self, duration:int, data: Union[List, Tuple]) -> None:
    ...
def write_pulses(self, duration:Union[List, Tuple], data:Union[List, Tuple]) -> None:
```

30.4 working on it

30.4.1 documentation

- how to run post-processing
- how the debug setup works

30.4.2 stubber :

- document - that gc and sys modules are somehow ignored by pylint and will keep throwing errors
- add mpy information to manifest
- use ‘nightly’ naming convention in createstubs.py
- change firmware naming

30.4.3 frozen stubs

- add simple readme.md ?

30.4.4 Stub augmentation/ merging typeinformation from copied / generated type-rich info

<https://libcst.readthedocs.io/en/latest/tutorial.html>

- test to auto-merge common prototypes by stubber ie. add common return types to make_stub_files.cfg

30.4.5 Webrepl

Unable to import ‘webrepl’ can include in common modules C:\develop\MyPython\micropython\extmod\webrepl\webrepl.py

DEVELOPING

31.1 Cloning the repo

```
git clone https://github.com/Josverl/micropython-stubber.git
cd micropython-stubber

poetry install
stubber clone
```

31.2 Windows 10


I use Windows 10/11 and use WSL2 to run the linux based parts. if you develop on other platform, it is quite likely that you may need to change some details. if that is needed , please update/add to the documentation and send a documentation PR.

- clone
- create python virtual environment (optional)
- install requirements-dev
- setup sister repos
- run test to verify setup

31.3 Github codespaces

Is is also possible to start a pre-configure development environment in [GitHub Codespaces](#) this is probably the fastest and quickest way to start developing.

Note that Codespaces is currently in an extended beta.

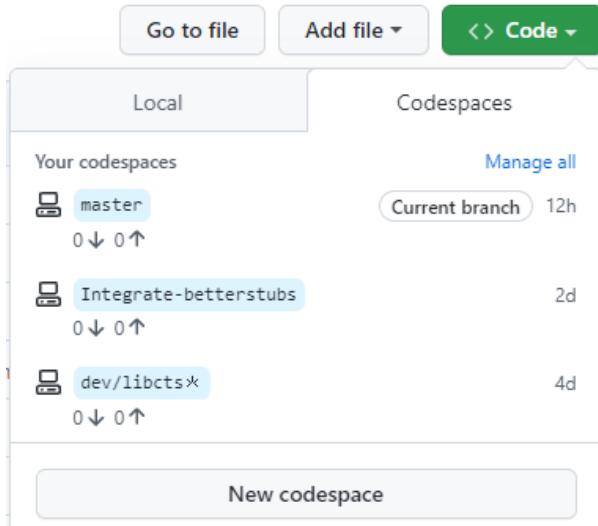

31.4 Wrestling with two pythons

This project combines CPython and MicroPython in one project. As a result you may/will need to switch the configuration of pylint and VSCode to match the section of code that you are working on. This is caused by the fact that pylint does not support per-folder configuration

to help switching there are 2 different .pylintrc files stored in the root of the project to simplify switching.

Similar changes will need to be done to the .vscode/settings.json

If / when we can get pylance to work with the micropython stubs , this may become simpler as Pylance natively supports [multi-root workspaces](#), meaning that you can open multiple folders in the same Visual Studio Code session and have Pylance functionality in each folder.

31.5 Minification

If you make changes to the `createstubs.py` script , you should also update the minified version by running `python process.py minify` at some point.

If you forget to do this there is a github action that should do this for you and create a PR for your branch.

31.6 Testing

MicroPython-Stubber has a number of tests written in Pytest

see below overview

folder	what	how	used where
board	createtestubs.pynormal & minified	runs createtestubs.py on micropython-linux ports	WSL2 and github actions
check-out_repo	simple_git moduleretrieval of frozen modules	does not use mocking but actually retrieves different firmware versions locally using git or dowNloads modules for online	local windows
common	all other tests	common	local + github action

Note: Also see [test documentation](#)

Platform detection to support pytest In order to allow both simple usability on MicroPython and testability on Full Python, createtestubs does a runtime test to determine the actual platform it is running on while importing the module. This is similar to using the `if __name__ == "__main__":` preamble. If running on MicroPython, then it starts stubbing

```
if isMicroPython():
    main()
```

Testing on micropython linux port(s) In order to be able to test `createtestubs.py`, it has been updated to run on linux, and accept a `--path` parameter to indicate the path where the stubs should be stored.

31.7 Debugging Cpython code that run Micropython

Some of the test code run the micropython executable using `subprocess.run()`. When you try to debug these tests the VSCode debugger (debugpy) (<https://github.com/microsoft/debugpy>) then tries to attach to that micropython subprocess in order to facilitate debugging. This will fail as reported in this [issue](#).

The solution to this problem is to disable subprocess debugging using the "subProcess": `false` switch.

```
// launch.json
{
    // disable pytest coverage report as it conflicts with debugging tests
    "name": "Debug pytest tests",
    "type": "python",
    "purpose": [
        "debug-test"
    ],
    "console": "integratedTerminal",
    "justMyCode": false,
    "stopOnEntry": false,
    "subProcess": false, // Avoid debugpy trying to debug micropython
    "env": {
        "PYTEST_ADDOPTS": "--no-cov"
    }
},
```

31.8 github actions

31.8.1 pytests.yml

This workflow will :

- test the workstation scripts
- test the createstubs.py script on multiple micropython linux versions
- test the minified createstubs.py script on multiple micropython linux versions

31.8.2 run minify-pr.yml

This workflow will :

- create a minified version of createstubs.py
- run a quick test on that
- and submit a PR to the branch -minify

CHAPTER
THIRTYTWO

TESTING

A significant number of tests have been created in pytest.

- The tests are located in the `tests` folder.
- The `tests/data` folder contains folders with subs that are used to verify the correct working of the minification modules
- debugging the tests only works if `-no-cov` is specified for pytest

32.1 testing & debugging `createtubs.py`

- the `tests\mocks` folder contains mock-modules that allow the micropython code to be run in CPython. This is used by the unit tests that verify `createtubs.py` and its minified version.
- in order to load / debug the test the python path needs to include the `cpython_core` modules (Q&D)
- mocking `cpython_core/os` is missing the `implementation` attribute so that has been added (Q&D)

32.2 platform detection

In order to allow both simple usability on MicroPython and testability on *full* Python, `createtubs` does a runtime test to determine the actual platform it is running on while importing the module

This is similar to using the `if __name__ == "__main__":` preamble

```
if isMicroPython():
    main()
```

This allows pytest test running on full Python to import `createtubs.py` and run tests against individual methods, while allowing the script to run directly on import on a MicroPython board.

Note: Some tests are platform dependent and have been marked to only run on linux or windows

32.3 Code Coverage

Code coverage is measured and reported in the `coverage/index.html` report. This report is not checked in to the repo, and therefore is only

CHAPTER
THIRTYTHREE

API REFERENCE

This page contains auto-generated API reference documentation¹.

33.1 `createtestubs`

Create stubs for (all) modules on a MicroPython board

33.1.1 Module Contents

Classes

<i>Stubber</i>	Generate stubs for modules in firmware
----------------	--

Functions

<i>ensure_folder</i> (path)	Create nested folders if needed
<i>_info()</i>	collect base information on this runtime
<i>get_root</i> (→ str)	Determine the root folder of the device
<i>file_exists</i> (filename)	
<i>show_help()</i>	
<i>read_path</i> (→ str)	get --path from cmdline. [unix/win]
<i>isMicroPython</i> (→ bool)	runtime test to determine full or micropython
<i>main()</i>	

¹ Created with sphinx-autoapi

Attributes

`__version__`

`ENOENT`

`_MAX_CLASS_LEVEL`

`_log`

`createtestubs.__version__ = 1.9.11`

`createtestubs.ENOENT = 2`

`createtestubs._MAX_CLASS_LEVEL = 2`

`class createtestubs.Stubber(path: str = None, firmware_id: str = None)`

Generate stubs for modules in firmware

Parameters

- `path (str)` –
- `firmware_id (str)` –

`get_obj_attributes(item_instance: object)`

extract information of the objects members and attributes

Parameters

`item_instance (object)` –

`add_modules(modules)`

Add additional modules to be exported

`create_all_stubs()`

Create stubs for all configured modules

`create_one_stub(module_name: str)`

Parameters

`module_name (str)` –

`create_module_stub(module_name: str, file_name: str = None) → bool`

Create a Stub of a single python module

Args: - `module_name` (str): name of the module to document. This module will be imported. - `file_name` (Optional[str]): the ‘path/filename.py’ to write to. If omitted will be created based on the module name.

Parameters

- `module_name (str)` –
- `file_name (str)` –

Return type

`bool`

write_object_stub(*fp*, *object_expr*: *object*, *obj_name*: *str*, *indent*: *str*, *in_class*: *int* = 0)

Write a module/object stub to an open file. Can be called recursive.

Parameters

- **object_expr** (*object*) –
- **obj_name** (*str*) –
- **indent** (*str*) –
- **in_class** (*int*) –

property flat_fwid

Turn _fwid from ‘v1.2.3’ into ‘1_2_3’ to be used in filename

clean(*path*: *str* = *None*)

Remove all files from the stub folder

Parameters

- **path** (*str*) –

report(*filename*: *str* = ‘modules.json’)

create json with list of exported modules

Parameters

- **filename** (*str*) –

createstubs.ensure_folder(*path*: *str*)

Create nested folders if needed

Parameters

- **path** (*str*) –

createstubs._info()

collect base information on this runtime

createstubs.get_root() → *str*

Determine the root folder of the device

Return type

str

createstubs.file_exists(*filename*: *str*)

Parameters

- **filename** (*str*) –

createstubs.show_help()

createstubs.read_path() → *str*

get –path from cmdline. [unix/win]

Return type

str

createstubs.isMicroPython() → *bool*

runtime test to determine full or micropython

Return type

bool

```
createtubs.main()  
createtubs._log
```

33.2 createtubs_db

Create stubs for (all) modules on a MicroPython board.

This variant of the createtubs.py script is optimized for use on very-low-memory devices. Note: this version has undergone limited testing.

- 1) reads the list of modules from a text file *./modulelist.txt* that should be uploaded to the device.
- 2) stored the already processed modules in a text file *./modulelist.done*
- 3) **process the modules in the database:**
 - stub the module
 - update the modulelist.done file
 - reboots the device if it runs out of memory
- 4) creates the modules.json

If that cannot be found then only a single module (micropython) is stubbed. In order to run this on low-memory devices two additional steps are recommended: - minification, using python-minifier to reduce overall size, and remove logging overhead. - cross compilation, using mpy-cross, to avoid the compilation step on the micropython device

You should find a cross-compiled version located here: `./minified/createtubs_db.mpy`

33.2.1 Module Contents

Classes

<i>Stubber</i>	Generate stubs for modules in firmware
----------------	--

Functions

<code>ensure_folder(path)</code>	Create nested folders if needed
<code>_info()</code>	collect base information on this runtime
<code>get_root(→ str)</code>	Determine the root folder of the device
<code>file_exists(filename)</code>	
<hr/>	
<code>show_help()</code>	
<code>read_path(→ str)</code>	get --path from cmdline. [unix/win]
<code>isMicroPython(→ bool)</code>	runtime test to determine full or micropython
<code>main_esp8266()</code>	
<hr/>	

Attributes

`__version__`

`ENOENT`

`_MAX_CLASS_LEVEL`

`_log`

`createtubs_db.__version__ = 1.9.11`

`createtubs_db.ENOENT = 2`

`createtubs_db._MAX_CLASS_LEVEL = 2`

`class createtubs_db.Stubber(path: str = None, firmware_id: str = None)`

Generate stubs for modules in firmware

Parameters

- `path (str)` –
- `firmware_id (str)` –

`get_obj_attributes(item_instance: object)`

extract information of the objects members and attributes

Parameters

`item_instance (object)` –

`add_modules(modules)`

Add additional modules to be exported

`create_all_stubs()`

Create stubs for all configured modules

`create_one_stub(module_name: str)`

Parameters

`module_name (str)` –

`create_module_stub(module_name: str, file_name: str = None) → bool`

Create a Stub of a single python module

Args: - `module_name (str)`: name of the module to document. This module will be imported. - `file_name (Optional[str])`: the ‘path/filename.py’ to write to. If omitted will be created based on the module name.

Parameters

- `module_name (str)` –
- `file_name (str)` –

Return type

`bool`

write_object_stub(*fp*, *object_expr*: *object*, *obj_name*: *str*, *indent*: *str*, *in_class*: *int* = 0)

Write a module/object stub to an open file. Can be called recursive.

Parameters

- **object_expr** (*object*) –
- **obj_name** (*str*) –
- **indent** (*str*) –
- **in_class** (*int*) –

property flat_fwid

Turn _fwid from ‘v1.2.3’ into ‘1_2_3’ to be used in filename

clean(*path*: *str* = *None*)

Remove all files from the stub folder

Parameters

- **path** (*str*) –

report(*filename*: *str* = ‘modules.json’)

create json with list of exported modules

Parameters

- **filename** (*str*) –

createstubs_db.ensure_folder(*path*: *str*)

Create nested folders if needed

Parameters

- **path** (*str*) –

createstubs_db._info()

collect base information on this runtime

createstubs_db.get_root() → *str*

Determine the root folder of the device

Return type*str***createstubs_db.file_exists**(*filename*: *str*)**Parameters**

- **filename** (*str*) –

createstubs_db.show_help()**createstubs_db.read_path()** → *str*

get –path from cmdline. [unix/win]

Return type*str***createstubs_db.isMicroPython()** → *bool*

runtime test to determine full or micropython

Return type*bool*

```
createtubs_db.main_esp8266()
createtubs_db._log
```

33.3 createtubs_mem

Create stubs for (all) modules on a MicroPython board.

This variant of the createtubs.py script is optimised for use on low-memory devices, and reads the list of modules from a text file *./modulelist.txt* that should be uploaded to the device. If that cannot be found then only a single module (*micropython*) is stubbed. In order to run this on low-memory devices two additional steps are recommended:

- minification, using python-minifier

- to reduce overall size, and remove logging overhead.

- cross compilation, using mpy-cross, to avoid the compilation step on the micropython device

you can find a cross-compiled version located here: *./minified/createtubs_mem.mpy*

33.3.1 Module Contents

Classes

<i>Stubber</i>	Generate stubs for modules in firmware
----------------	--

Functions

<i>ensure_folder(path)</i>	Create nested folders if needed
<i>_info()</i>	collect base information on this runtime
<i>get_root(→ str)</i>	Determine the root folder of the device
<i>file_exists(filename)</i>	
<hr/>	
<i>show_help()</i>	
<i>read_path(→ str)</i>	get --path from cmdline. [unix/win]
<i>isMicroPython(→ bool)</i>	runtime test to determine full or micropython
<i>main()</i>	
<hr/>	

Attributes

<i>__version__</i>
<i>ENOENT</i>
<i>MAX_CLASS_LEVEL</i>
<i>_log</i>
<hr/>

```
createtestubs_mem.__version__ = 1.9.11
createtestubs_mem.ENOENT = 2
createtestubs_mem._MAX_CLASS_LEVEL = 2

class createtestubs_mem.Stubber(path: str = None, firmware_id: str = None)
```

Generate stubs for modules in firmware

Parameters

- **path** (*str*) –
- **firmware_id** (*str*) –

```
get_obj_attributes(item_instance: object)
```

extract information of the objects members and attributes

Parameters

item_instance (*object*) –

```
add_modules(modules)
```

Add additional modules to be exported

```
create_all_stubs()
```

Create stubs for all configured modules

```
create_one_stub(module_name: str)
```

Parameters

module_name (*str*) –

```
create_module_stub(module_name: str, file_name: str = None) → bool
```

Create a Stub of a single python module

Args: - **module_name** (str): name of the module to document. This module will be imported. - **file_name** (Optional[str]): the ‘path/filename.py’ to write to. If omitted will be created based on the module name.

Parameters

- **module_name** (*str*) –
- **file_name** (*str*) –

Return type

bool

```
write_object_stub(fp, object_expr: object, obj_name: str, indent: str, in_class: int = 0)
```

Write a module/object stub to an open file. Can be called recursive.

Parameters

- **object_expr** (*object*) –
- **obj_name** (*str*) –
- **indent** (*str*) –
- **in_class** (*int*) –

```
property flat_fwid
```

Turn _fwid from ‘v1.2.3’ into ‘1_2_3’ to be used in filename

clean(*path*: str = None)
Remove all files from the stub folder

Parameters
path (str) –

report(*filename*: str = 'modules.json')
create json with list of exported modules

Parameters
filename (str) –

createtestubs_mem.ensure_folder(*path*: str)
Create nested folders if needed

Parameters
path (str) –

createtestubs_mem._info()
collect base information on this runtime

createtestubs_mem.get_root() → str
Determine the root folder of the device

Return type
str

createtestubs_mem.file_exists(*filename*: str)

Parameters
filename (str) –

createtestubs_mem.show_help()

createtestubs_mem.read_path() → str
get –path from cmdline. [unix/win]

Return type
str

createtestubs_mem.isMicroPython() → bool
runtime test to determine full or micropython

Return type
bool

createtestubs_mem.main()

createtestubs_mem._log

33.4 stub_lvgl

Helper module to create stubs for the lvgl modules. Note that the stubs can be very large, and it may be best to directly store them on an SD card if your device supports this.

33.4.1 Module Contents

Functions

<code>main()</code>	Create stubs for the lvgl modules using the lvgl version number.
---------------------	--

`stub_lvgl.main()`

Create stubs for the lvgl modules using the lvgl version number.

33.5 stubber

read the version from pyproject or the wheels

33.5.1 Subpackages

`stubber.codemod`

Submodules

`stubber.codemod.add_comment`

Module Contents

Classes

<code>AddComment</code>	A command that acts identically to a visitor-based transform, but also has
-------------------------	--

`class stubber.codemod.add_comment.AddComment(context: libcst.codemod.CodemodContext, comments: List[str])`

Bases: `libcst.codemod.VisitorBasedCodemodCommand`

A command that acts identically to a visitor-based transform, but also has the support of `add_args()` and running supported helper transforms after execution. See `CodemodCommand` and `ContextAwareTransformer` for additional documentation.

Parameters

- `context (libcst.codemod.CodemodContext)` –
- `comments (List[str])` –

DESCRIPTION :str = Add comment(s) to each file

static add_args(arg_parser: argparse.ArgumentParser) → None

Override this to add arguments to the CLI argument parser. These args will show up when the user invokes `libcst.tool codemod` with `--help`. They will also be presented to your class's `__init__` method. So, if you define a command with an argument 'foo', you should also have a corresponding 'foo' positional or keyword argument in your class's `__init__` method.

Parameters

arg_parser (argparse.ArgumentParser) –

Return type

None

visit_Comment(node: libcst.Comment) → None

Parameters

node (libcst.Comment) –

Return type

None

leave_Module(original_node: libcst.Module, updated_node: libcst.Module) → libcst.Module

Parameters

- **original_node (libcst.Module) –**
- **updated_node (libcst.Module) –**

Return type

libcst.Module

stubber.codemod.enrich

Module Contents

Functions

enrich_file(→ Optional[str])	Enrich a firmware stubs using the doc-stubs in another folder.
enrich_folder(→ int)	Enrich a folder with containing firmware stubs using the doc-stubs in another folder.

stubber.codemod.enrich.enrich_file(target_path: pathlib.Path, docstub_path: pathlib.Path, diff=False, write_back=False) → Optional[str]

Enrich a firmware stubs using the doc-stubs in another folder. Both (.py or .pyi) files are supported.

Parameters

- **source_path** – the path to the firmware stub to enrich
- **docstub_path (pathlib.Path)** – the path to the folder containg the doc-stubs
- **diff** – if True, return the diff between the original and the enriched source file
- **write_back** – if True, write the enriched source file back to the source_path
- **target_path (pathlib.Path)** –

Return type

Optional[str]

Returns: - None or a string containing the diff between the original and the enriched source file

`stubber.codemod.enrich.enrich_folder(source_folder: pathlib.Path, docstub_path: pathlib.Path, show_diff=False, write_back=False, require_docstub=False) → int`

Enrich a folder with containing firmware stubs using the doc-stubs in another folder.

Returns the number of files enriched.

Parameters

- `source_folder (pathlib.Path)` –
- `docstub_path (pathlib.Path)` –

Return type

int

`stubber.codemod.merge_docstub`

Module Contents

Classes

`MergeCommand`

A libcst transformer that merges the type-rich information from a doc-stub into

`class stubber.codemod.merge_docstub.MergeCommand(context: libcst.codemod.CodemodContext, stub_file: Union[pathlib.Path, str])`

Bases: `libcst.codemod.VisitorBasedCodemodCommand`

A libcst transformer that merges the type-rich information from a doc-stub into a firmware stub. The resulting file will contain information from both sources.

- module docstring - from source
- function parameters and types - from docstubs
- function return types - from docstubs
- function docstrings - from source

Parameters

- `context (libcst.codemod.CodemodContext)` –
- `stub_file (Union[pathlib.Path, str])` –

DESCRIPTION :str = Merge the type-rich information from a doc-stub into a firmware stub

`static add_args(arg_parser: argparse.ArgumentParser) → None`

Add command-line args that a user can specify for running this codemod.

Parameters

- `arg_parser (argparse.ArgumentParser)` –

Return type

None

leave_Module(*original_node*: libcst.Module, *updated_node*: libcst.Module) → libcst.Module

Update the Module docstring

Parameters

- **original_node** (libcst.Module) –
- **updated_node** (libcst.Module) –

Return type

libcst.Module

visit_ClassDef(*node*: libcst.ClassDef) → Optional[bool]**Parameters****node** (libcst.ClassDef) –**Return type**

Optional[bool]

leave_ClassDef(*original_node*: libcst.ClassDef, *updated_node*: libcst.ClassDef) → libcst.ClassDef**Parameters**

- **original_node** (libcst.ClassDef) –
- **updated_node** (libcst.ClassDef) –

Return type

libcst.ClassDef

visit_FunctionDef(*node*: libcst.FunctionDef) → Optional[bool]**Parameters****node** (libcst.FunctionDef) –**Return type**

Optional[bool]

leave_FunctionDef(*original_node*: libcst.FunctionDef, *updated_node*: libcst.FunctionDef) → Union[libcst.FunctionDef, libcst.ClassDef]

Update the function Parameters and return type, decorators and docstring

Parameters

- **original_node** (libcst.FunctionDef) –
- **updated_node** (libcst.FunctionDef) –

Return type

Union[libcst.FunctionDef, libcst.ClassDef]

`stubber.commands`

Submodules

`stubber.commands.build_cmd`

Build stub packages - is a Light version of Publish command

Module Contents

Functions

`cli_build(family, versions, ports, boards, clean)` Commandline interface to publish stubs.

`stubber.commands.build_cmd.cli_build(family: str, versions: Union[str, List[str]], ports: Union[str, List[str]], boards: Union[str, List[str]], clean: bool)`

Commandline interface to publish stubs.

Parameters

- `family (str)` –
- `versions (Union[str, List[str])` –
- `ports (Union[str, List[str]])` –
- `boards (Union[str, List[str]])` –
- `clean (bool)` –

`stubber.commands.cli`

command line interface - main group

Module Contents

Functions

`stubber_cli(ctx[, verbose])`

`stubber.commands.cli.stubber_cli(ctx, verbose: int = 0)`

Parameters

- `verbose (int)` –

`stubber.commands.clone_cmd`

Module Contents

Functions

<code>cli_clone(path[, stubs])</code>	Clone/fetch the micropython repos locally.
---------------------------------------	--

`stubber.commands.clone_cmd.cli_clone(path: Union[str, pathlib.Path], stubs: bool = False)`

Clone/fetch the micropython repos locally.

The local repos are used to generate frozen-stubs and doc-stubs.

Parameters

- `path (Union[str, pathlib.Path])` –
- `stubs (bool)` –

`stubber.commands.config_cmd`

Module Contents

Functions

<code>cli_config()</code>	Show the current configuration
---------------------------	--------------------------------

`stubber.commands.config_cmd.cli_config()`

Show the current configuration

`stubber.commands.enrich_folder_cmd`

enrich machinestubs with docstubs

Module Contents

Functions

<code>cli_enrich_folder(stubs_folder, docstubs_folder[, ...])</code>	Enrich the stubs in stub_folder with the docstubs in docstubs_folder.
--	---

`stubber.commands.enrich_folder_cmd.cli_enrich_folder(stubs_folder: Union[str, pathlib.Path], docstubs_folder: Union[str, pathlib.Path], diff=False, dry_run=False)`

Enrich the stubs in stub_folder with the docstubs in docstubs_folder.

Parameters

- **stubs_folder** (*Union[str, pathlib.Path]*) –
- **docstubs_folder** (*Union[str, pathlib.Path]*) –

`stubber.commands.get_core_cmd`

Module Contents

Functions

<code>cli_get_core([stub_folder, pyi, black])</code>	Download core CPython stubs from PyPi.
--	--

`stubber.commands.get_core_cmd.cli_get_core(stub_folder: str = CONFIG.stub_path.as_posix(), pyi: bool = True, black: bool = True)`

Download core CPython stubs from PyPi.

Get the core (CPython compat) modules for both MicroPython and Pycopy.

Parameters

- **stub_folder** (*str*) –
- **pyi** (*bool*) –
- **black** (*bool*) –

`stubber.commands.get_docstubs_cmd`

get-docstubs

Module Contents

Functions

<code>cli_docstubs(ctx[, path, target, black, basename])</code>	Build stubs from documentation.
---	---------------------------------

`stubber.commands.get_docstubs_cmd.cli_docstubs(ctx, path: str = CONFIG.repo_path.as_posix(), target: str = CONFIG.stub_path.as_posix(), black: bool = True, basename='micropython')`

Build stubs from documentation.

Read the MicroPython library documentation files and use them to build stubs that can be used for static type-checking.

Parameters

- **path** (*str*) –
- **target** (*str*) –
- **black** (*bool*) –

`stubber.commands.get_frozen_cmd`

Module Contents

Functions

<code>cli_get_frozen([stub_folder, version, pyi, black])</code>	Get the frozen stubs for MicroPython.
---	---------------------------------------

`stubber.commands.get_frozen_cmd.cli_get_frozen(stub_folder: str = CONFIG.stub_path.as_posix(), version: str = "", pyi: bool = True, black: bool = True)`

Get the frozen stubs for MicroPython.

Get the frozen modules for the checked out version of MicroPython

Parameters

- `stub_folder (str)` –
- `version (str)` –
- `pyi (bool)` –
- `black (bool)` –

`stubber.commands.get_lobo_cmd`

get-lobo (frozen)

Module Contents

Functions

<code>cli_get_lobo([stub_folder, pyi, black])</code>	Get the frozen stubs for Lobo-esp32.
--	--------------------------------------

`stubber.commands.get_lobo_cmd.cli_get_lobo(stub_folder: str = CONFIG.stub_path.as_posix(), pyi: bool = True, black: bool = True)`

Get the frozen stubs for Lobo-esp32.

Parameters

- `stub_folder (str)` –
- `pyi (bool)` –
- `black (bool)` –

`stubber.commands.merge_cmd`

enrich machinestubs with docstubs

Module Contents

Functions

`cli_merge_docstubs(versions, family)`

Enrich the stubs in stub_folder with the docstubs in docstubs_folder.

`stubber.commands.merge_cmd.cli_merge_docstubs(versions: Union[str, List[str]], family)`

Enrich the stubs in stub_folder with the docstubs in docstubs_folder.

Parameters

`versions (Union[str, List[str]]) –`

`stubber.commands.minify_cmd`

Module Contents

Functions

`cli_minify(→ int)`

Minify createstubs*.py.

`stubber.commands.minify_cmd.cli_minify(ctx, source: Union[str, pathlib.Path], target: Union[str, pathlib.Path], keep_report: bool, diff: bool, cross_compile: bool, all: bool) → int`

Minify createstubs*.py.

Creates a minified version of the SOURCE micropython file in TARGET (file or folder). The goal is to use less memory / not to run out of memory, while generating Firmware stubs.

Parameters

- `source (Union[str, pathlib.Path]) –`
- `target (Union[str, pathlib.Path]) –`
- `keep_report (bool) –`
- `diff (bool) –`
- `cross_compile (bool) –`
- `all (bool) –`

Return type

`int`

`stubber.commands.publish_cmd`

Module Contents

Functions

<code>cli_publish(family, versions, ports, boards, ...)</code>	Commandline interface to publish stubs.
--	---

`stubber.commands.publish_cmd.cli_publish(family: str, versions: Union[str, List[str]], ports: Union[str, List[str]], boards: Union[str, List[str]], production: bool, dryrun: bool, force: bool, clean: bool)`

Commandline interface to publish stubs.

Parameters

- **family** (`str`) –
- **versions** (`Union[str, List[str]]`) –
- **ports** (`Union[str, List[str]]`) –
- **boards** (`Union[str, List[str]]`) –
- **production** (`bool`) –
- **dryrun** (`bool`) –
- **force** (`bool`) –
- **clean** (`bool`) –

`stubber.commands.stub_cmd`

Module Contents

Functions

<code>cli_stub(source)</code>	Create or update .pyi type hint files.
-------------------------------	--

`stubber.commands.stub_cmd.cli_stub(source: Union[str, pathlib.Path])`

Create or update .pyi type hint files.

Parameters

- **source** (`Union[str, pathlib.Path]`) –

`stubber.commands.switch_cmd`

switch

Module Contents

Functions

<code>cli_switch(path[, tag])</code>	Switch to a specific version of the micropython repos.
--------------------------------------	--

Attributes

<code>VERSION_LIST</code>

`stubber.commands.switch_cmd.VERSION_LIST`

`stubber.commands.switch_cmd.cli_switch(path: Union[str, pathlib.Path], tag: Optional[str] = None)`

Switch to a specific version of the micropython repos.

Specify the version of the MicroPython repo. use of the –tag or –version is deprecated

The Micropython-lib repo will be checked out to a commit that corresponds in time to that version tag, in order to allow non-current versions to be stubbed correctly.

The repos must be cloned already

Parameters

- `path (Union[str, pathlib.Path])` –
- `tag (Optional[str])` –

`stubber.commands.upd_fallback_cmd`

update-fallback folder with common set of stubs that cater for most of the devices

Module Contents

Functions

<code>cli_update_fallback(version[, stub_folder])</code>	Update the fallback stubs.
--	----------------------------

`stubber.commands.upd_fallback_cmd.cli_update_fallback(version: str, stub_folder: str = CONFIG.stub_path.as_posix())`

Update the fallback stubs.

The fallback stubs are updated/collated from files of the firmware-stubs, doc-stubs and core-stubs.

Parameters

- **version**(*str*) –
- **stub_folder**(*str*) –

stubber.commands.upd_module_list_cmd

update-fallback folder with common set of stubs that cater for most of the devices

Module Contents**Functions**

<code>cli_update_module_list()</code>	Update the module list based on the information in the data folder.
<code>stubber.commands.upd_module_list_cmd.cli_update_module_list()</code>	
Update the module list based on the information in the data folder.	
<code>stubber.freeze</code>	
Submodules	
<code>stubber.freeze.common</code>	
Module Contents	
Functions	
<code>get_portboard(manifest_path)</code>	returns a 2-tuple of the port and board in the provided manifest path
<code>get_freeze_path(→ Tuple[pathlib.Path, str])</code>	get path to a folder to store the frozen stubs for the given port/board
<code>apply_frozen_module_fixes(freeze_path, mpy_path)</code>	apply common fixes to the frozen modules to improve stub generation
<code>stubber.freeze.common.get_portboard(<i>manifest_path: pathlib.Path</i>)</code>	
returns a 2-tuple of the port and board in the provided manifest path	
raises an ValueError if neither a port or board can be found	
Parameters	
manifest_path (<i>pathlib.Path</i>) –	
<code>stubber.freeze.common.get_freeze_path(<i>stub_path: pathlib.Path, port: str, board: str</i>) → Tuple[pathlib.Path, str]</code>	
get path to a folder to store the frozen stubs for the given port/board	
Parameters	
• stub_path (<i>pathlib.Path</i>) –	

- **port** (*str*) –
- **board** (*str*) –

Return type

`Tuple[pathlib.Path, str]`

`stubber.freeze.common.apply_frozen_module_fixes(freeze_path: pathlib.Path, mpy_path: pathlib.Path)`

apply common fixes to the frozen modules to improve stub generation

Parameters

- **freeze_path** (*pathlib.Path*) –
- **mpy_path** (*pathlib.Path*) –

`stubber.freeze.freeze_folder`

Module Contents

Functions

`freeze_folders(stub_folder, mpy_folder, lib_folder, ...)` get and parse the to-be-frozen .py modules for micropython to extract the static type information

Attributes

`FAMILY`

`stubber.freeze.freeze_folder.FAMILY = micropython`

`stubber.freeze.freeze_folder.freeze_folders(stub_folder: str, mpy_folder: str, lib_folder: str, version: str)`

get and parse the to-be-frozen .py modules for micropython to extract the static type information locates the to-be-frozen files in modules folders - ‘ports/<port>/modules/.py’ - ‘ports/<port>/boards/<board>/modules/.py’

Parameters

- **stub_folder** (*str*) –
- **mpy_folder** (*str*) –
- **lib_folder** (*str*) –
- **version** (*str*) –

stubber.freeze.freeze_manifest_2**Module Contents****Functions**

`make_path_vars(*[, mpy_path, mpy_lib_path, port, board])`

`freeze_one_manifest_2(manifest, frozen_stub_path, ...)`

`copy_frozen_to_stubs(stub_path, port, board, files, copy the frozen files from the manifest to the stubs folder ...)`

`stubber.freeze.freeze_manifest_2.make_path_vars(*, mpy_path: pathlib.Path = CONFIG.mpy_path,
mpy_lib_path: pathlib.Path =
CONFIG.mpy_lib_path, port: Optional[str] = None,
board: Optional[str] = None)`

Parameters

- **mpy_path** (`pathlib.Path`) –
- **mpy_lib_path** (`pathlib.Path`) –
- **port** (`Optional[str]`) –
- **board** (`Optional[str]`) –

`stubber.freeze.freeze_manifest_2.freeze_one_manifest_2(manifest: pathlib.Path, frozen_stub_path: pathlib.Path, mpy_path: pathlib.Path, mpy_lib_path: pathlib.Path, version: str)`

Parameters

- **manifest** (`pathlib.Path`) –
- **frozen_stub_path** (`pathlib.Path`) –
- **mpy_path** (`pathlib.Path`) –
- **mpy_lib_path** (`pathlib.Path`) –
- **version** (`str`) –

`stubber.freeze.freeze_manifest_2.copy_frozen_to_stubs(stub_path: pathlib.Path, port: str, board: str, files: List[stubber.tools.manifestfile.ManifestOutput], version: str, mpy_path: pathlib.Path)`

copy the frozen files from the manifest to the stubs folder

stubpath = the destination : # stubs/{family}-{version}-frozen

Parameters

- **stub_path** (`pathlib.Path`) –
- **port** (`str`) –
- **board** (`str`) –

- **files** (*List[stubber.tools.manifestfile.ManifestOutput]*) –
- **version** (*str*) –
- **mpy_path** (*pathlib.Path*) –

`stubber.freeze.get_frozen`

Collect modules and python stubs from MicroPython source projects (v1.12 +) and stores them in the all_stubs folder
The all_stubs folder should be mapped/symlinked to the micropython_stubs/stubs repo/folder

Module Contents

Functions

<code>get_manifests</code> (→ <i>List[pathlib.Path]</i>)	return a list of all manifests.py files found in the ports folder
<code>freeze_any</code> (<i>stub_folder</i> , <i>version</i> [, <i>mpy_path</i> , <i>mpy_lib_path</i>])	get and parse the to-be-frozen .py modules for micropython to extract the static type information

Attributes

FAMILY

`stubber.freeze.get_frozen.FAMILY = micropython`

`stubber.freeze.get_frozen.get_manifests`(*mpy_path*: *pathlib.Path*) → *List[pathlib.Path]*
return a list of all manifests.py files found in the ports folder

Parameters

- **mpy_path** (*pathlib.Path*) –

Return type

List[pathlib.Path]

`stubber.freeze.get_frozen.freeze_any`(*stub_folder*: *pathlib.Path*, *version*: *str*, *mpy_path*:
Optional[pathlib.Path] = *None*, *mpy_lib_path*:
Optional[pathlib.Path] = *None*)

get and parse the to-be-frozen .py modules for micropython to extract the static type information

- requires that the MicroPython and Micropython-lib repos are checked out and available on a local path
- repos should be cloned side-by-side as some of the manifests refer to micropython-lib scripts using a relative path

the repos should be checked out to the version

Parameters

- **stub_folder** (*pathlib.Path*) –
- **version** (*str*) –

- **mpy_path** (*Optional[pathlib.Path]*) –
- **mpy_lib_path** (*Optional[pathlib.Path]*) –

`stubber.publish`

Submodules

`stubber.publish.bump`

Module Contents

Functions

<code>bump_postrelease</code> (→ <i>packaging.version.Version</i>)	Increases the post release version number
---	---

`stubber.publish.bump.bump_postrelease`(*current: packaging.version.Version*, *rc: int = 0*) → *packaging.version.Version*

Increases the post release version number

This allows for a new stub-release to be published while still using the Major.Minor.Patch version numbers of Micropython if *rc* = 0(default) : bump post release

format: x.y.z.post1, x.y.z.post2 ...

if rec specified:

drop the post release and set the release candidate number

ref: <https://peps.python.org/pep-0440/>

Parameters

- **current** (*packaging.version.Version*) –
- **rc** (*int*) –

Return type

packaging.version.Version

`stubber.publish.candidates`

Module Contents

Functions

<code>subfolder_names(path)</code>	returns a list of names of the subfolders of the given path
<code>version_candidates(→ Generator[str, None, None])</code>	get a list of versions for the given family and suffix
<code>list_frozen_ports([family, version, path])</code>	get list of ports with frozen stubs for a given family and version
<code>list_micropython_ports([family, mpy_path])</code>	get list of micropython ports for a given family and version
<code>list_micropython_port_boards(port[, family, mpy_path])</code>	get list of micropython boards for a given family version and board
<code>frozen_candidates(→ Generator[Dict[str, Any], None, None])</code>	generate a list of possible firmware stubs for the given family (, version port and board) ?
<code>docstub_candidates([family, versions, path])</code>	generate a list of possible documentation stub candidates for the given family and version.
<code>firmware_candidates([family, versions, mpy_path, pt])</code>	generate a list of possible firmware stub candidates for the given family and version.

Attributes

<code>OLDEST_VERSION</code>	This is the oldest MicroPython version to build the stubs on
<code>V_LATEST</code>	

`stubber.publish.candidates.OLDEST_VERSION = 1.16`

This is the oldest MicroPython version to build the stubs on

`stubber.publish.candidates.V_LATEST = latest`

`stubber.publish.candidates.subfolder_names(path: pathlib.Path)`

returns a list of names of the subfolders of the given path

Parameters

`path (pathlib.Path) –`

`stubber.publish.candidates.version_candidates(suffix: str, prefix='.*', *, path=CONFIG.stub_path, oldest=OLDEST_VERSION) → Generator[str, None, None]`

get a list of versions for the given family and suffix

Parameters

`suffix (str) –`

Return type

`Generator[str, None, None]`

`stubber.publish.candidates.list_frozen_ports(family: str = 'micropython', version: str = V_LATEST, path=CONFIG.stub_path)`

get list of ports with frozen stubs for a given family and version

Parameters

- `family (str) –`

- **version** (*str*) –

```
stubber.publish.candidates.list_micropython_ports(family: str = 'micropython',
                                                mpy_path=CONFIG.mpy_path)
```

get list of micropython ports for a given family and version

Parameters

- **family** (*str*) –

```
stubber.publish.candidates.list_micropython_port_boards(port: str, family: str = 'micropython',
                                                       mpy_path=CONFIG.mpy_path)
```

get list of micropython boards for a given family version and board

Parameters

- **port** (*str*) –
- **family** (*str*) –

```
stubber.publish.candidates.frozen_candidates(family: str = 'micropython', versions: Union[str, List[str]]]
                                             = V_LATEST, ports: Union[str, List[str]] = 'auto',
                                             boards: Union[str, List[str]] = 'auto', *,
                                             path=CONFIG.stub_path) → Generator[Dict[str, Any],
                                             None, None]
```

generate a list of possible firmware stubs for the given family (, version port and board) ? - family = micropython

board and port are ignored, they are looked up from the available frozen stubs

- versions = ‘latest’ , ‘auto’ or a list of versions
- port = ‘auto’ or a specific port
- board = ‘auto’ or a specific board, ‘GENERIC’ must be specified in ALLCAPS

Parameters

- **family** (*str*) –
- **versions** (*Union[str, List[str]]*) –
- **ports** (*Union[str, List[str]]*) –
- **boards** (*Union[str, List[str]]*) –

Return type

Generator[Dict[str, Any], None, None]

```
stubber.publish.candidates.docstub_candidates(family: str = 'micropython', versions: Union[str,
                                         List[str]] = V_LATEST, path=CONFIG.stub_path)
```

generate a list of possible documentation stub candidates for the given family and version.

Note that the folders do not need to exist, with the exception of auto which will scan the stubs folder for versions of docstubs

Parameters

- **family** (*str*) –
- **versions** (*Union[str, List[str]]*) –

```
stubber.publish.candidates.firmware_candidates(family: str = 'micropython', versions: Union[str,  
List[str]] = V_LATEST, *,  
mpy_path=CONFIG.mpy_path,  
pt=FIRMWARE_STUBS)
```

generate a list of possible firmware stub candidates for the given family and version. list is basesed on the micropython repo /ports/<list of ports>/boards/<list of boards>

Parameters

- **family** (str) –
- **versions** (Union[str, List[str]]) –

stubber.publish.database

Module Contents

Functions

get_database (→ pysondb.PysonDB)	Open the json database at the given path.
---	---

```
stubber.publish.database.get_database(publish_path: Union[pathlib.Path, str], production: bool = False)  
→ pysondb.PysonDB
```

Open the json database at the given path.

The database should be located in a subfolder */publish* of the root path. The database name is determined by the production flag as *package_data[_test].jsondb*

Parameters

- **publish_path** (Union[pathlib.Path, str]) –
- **production** (bool) –

Return type

pysondb.PysonDB

stubber.publish.enums

Module Contents

Classes

StubSource	str(object="") -> str
-------------------	-----------------------

Attributes

`ALL_TYPES`

`COMBO_STUBS`

`DOC_STUBS`

`CORE_STUBS`

`FIRMWARE_STUBS`

class `stubber.publish.enums.StubSource`

Bases: `str, enum.Enum`

`str(object=’’) -> str` `str(bytes_or_buffer[, encoding[, errors]]) -> str`

Create a new string object from the given object. If encoding or errors is specified, then the object must expose a data buffer that will be decoded using the given encoding and error handler. Otherwise, returns the result of `object.__str__()` (if defined) or `repr(object)`. encoding defaults to `sys.getdefaultencoding()`. errors defaults to ‘strict’.

FIRMWARE = Firmware stubs

stubs built by combining the firmware, frozen and core stubs

FROZEN = Frozen stubs

stubs of python modules that are frozen as part of the firmware image

CORE = Core stubs

stubs that allow (some) MicroPython code to be run by CPython

DOC = Doc stubs

stubs built by parsing the micropython RST documentation files

MERGED = Merged stubs

stubs built by merging the information from doc-stubs and firmware-stubs

`stubber.publish.enums.ALL_TYPES = ['combo', 'doc', 'core', 'firmware']`

`stubber.publish.enums.COMBO_STUBS`

`stubber.publish.enums.DOC_STUBS`

`stubber.publish.enums.CORE_STUBS`

`stubber.publish.enums.FIRMWARE_STUBS`

stubber.publish.merge_docstubs

Merge firmware stubs and docstubs into a single folder

Module Contents

Functions

<code>fw_folder_name(base, fw)</code>	return the name of the firmware folder
<code>merge_all_docstubs(versions[, family, mpy_path])</code>	merge docstubs into firmware stubs
<code>copy_docstubs(fw_path, dest_path, docstub_path)</code>	param fw_path Path to firmware stubs (absolute path)

Attributes

`LAST_VERSION`

`stubber.publish.merge_docstubs.LAST_VERSION = v1.19.1`

`stubber.publish.merge_docstubs.fw_folder_name(base: str, fw: Dict)`

return the name of the firmware folder

Parameters

- **base** (`str`) –
- **fw** (`Dict`) –

`stubber.publish.merge_docstubs.merge_all_docstubs(versions, family: str = 'micropython', *, mpy_path=CONFIG.mpy_path)`

merge docstubs into firmware stubs

Parameters

family (`str`) –

`stubber.publish.merge_docstubs.copy_docstubs(fw_path: pathlib.Path, dest_path: pathlib.Path, docstub_path: pathlib.Path)`

Parameters

- **fw_path** (`pathlib.Path`) – Path to firmware stubs (absolute path)
- **dest_path** (`pathlib.Path`) – Path to destination (absolute path)
- **mpy_version** – micropython version ('1.18')
- **docstub_path** (`pathlib.Path`) –

Copy files from the firmware stub folders to the merged - 1 - Copy all firmware stubs to the package folder - 1.B - clean up a little bit - 2 - Enrich the firmware stubs with the document stubs

stubber.publish.package

prepare a set of stub files for publishing to PyPi

Module Contents**Functions**

<code>package_name(→ str)</code>	generate a package name for the given package type
<code>get_package_info(→ Union[Dict, None])</code>	get a package's record from the json db if it can be found
<code>create_package(→ stubber.publish.stubpacker.StubPackage)</code>	create and initialize a package with the correct sources

`stubber.publish.package.package_name(pkg_type, port: str = "", board: str = "", family='micropython', **kwargs) → str`

generate a package name for the given package type

Parameters

- `port (str)` –
- `board (str)` –

Return type

`str`

`stubber.publish.package.get_package_info(db: pysondb.PysonDB, pub_path: pathlib.Path, *, pkg_name: str, mpy_version: str) → Union[Dict, None]`

get a package's record from the json db if it can be found matches om the package name and version

`pkg_name`: package name (micropython-esp32-stubs) `mpy_version`: micropython/firmware version (1.18)

Parameters

- `db (pysondb.PysonDB)` –
- `pub_path (pathlib.Path)` –
- `pkg_name (str)` –
- `mpy_version (str)` –

Return type

`Union[Dict, None]`

`stubber.publish.package.create_package(pkg_name: str, mpy_version: str, *, port: str = "", board: str = "", family: str = 'micropython', pkg_type=COMBO_STUBS) → stubber.publish.stubpacker.StubPackage`

create and initialize a package with the correct sources

Parameters

- `pkg_name (str)` –
- `mpy_version (str)` –
- `port (str)` –

- **board** (*str*) –
- **family** (*str*) –

Return type

stubber.publish.stubpacker.StubPackage

stubber.publish.publish

prepare a set of stub files for publishing to PyPi

required folder structure: NOTE: stubs and publish paths can be located in different locations and repositories

+–stubs - [config.stubs_path] | +–<any stub folders in repo> | +–micropython-v1_18-esp32

+–publish - [config.publish_path] | +–package_data.jsondb | +–package_data_test.jsondb | +–template - [config.template_path] | +–pyproject.toml | +–README.md | +–LICENSE.md | +–<folder for each package> | +–<package name> double nested to match the folder structure | +–<family>-<port>-<board>-<type>-stubs-<version> | +–micropython-esp32-stubs-v1_18 | +–micropython-stm32-stubs-v1_18 | +–micropython-stm32-stubs-v1_19_1 | +–... |

!!Note: anything excluded in .gitignore is not packaged by poetry

Module Contents

Functions

<i>publish</i> (→ Dict[str, Any])	Publish a package to PyPi
<i>publish_one</i> ([family, versions, ports, boards, frozen, ...])	Publish a bunch of stub packages of the same version
<i>publish_multiple</i> ([family, versions, ports, boards, ...])	Publish a bunch of stub packages

stubber.publish.publish.publish(**db: pysondb.PysonDB, pkg_type, version: str, family='micropython', production, dryrun=False, force=False, clean: bool = False, port: str = '', board: str = ''*) → Dict[str, Any]

Publish a package to PyPi look up the previous package version in the database, and only publish if there are changes to the package - change determined by hash across all files

Parameters

- **db** (*pysondb.PysonDB*) –
- **version** (*str*) –
- **clean** (*bool*) –
- **port** (*str*) –
- **board** (*str*) –

Return type

Dict[str, Any]

stubber.publish.publish.publish_one(family='micropython', versions: Union[str, List[str]] = 'v1.18', ports: Union[str, List[str]] = 'auto', boards: Union[str, List[str]] = 'GENERIC', frozen: bool = False, production=False, dryrun: bool = False, clean: bool = False, force: bool = False)

Publish a bunch of stub packages of the same version

Parameters

- **versions** (*Union[str, List[str]]*) –
- **ports** (*Union[str, List[str]]*) –
- **boards** (*Union[str, List[str]]*) –
- **frozen** (*bool*) –
- **dryrun** (*bool*) –
- **clean** (*bool*) –
- **force** (*bool*) –

```
stubber.publish.publish.publish_multiple(family='micropython', versions: List[str] = ['v1.18', 'v1.19.1'],  
                                         ports: List[str] = ['auto'], boards: List[str] = ['GENERIC'],  
                                         frozen: bool = False, production=False, dryrun: bool = False,  
                                         clean: bool = False, force: bool = False)
```

Publish a bunch of stub packages

Parameters

- **versions** (*List[str]*) –
- **ports** (*List[str]*) –
- **boards** (*List[str]*) –
- **frozen** (*bool*) –
- **dryrun** (*bool*) –
- **clean** (*bool*) –
- **force** (*bool*) –

```
stubber.publish.pypi
```

Module Contents

Functions

<code>get_pypy_versions(package_name[, base, produc-</code>	Get all versions of a package from a PyPI endpoint.
<code>tion])</code>	

```
stubber.publish.pypi.get_pypy_versions(package_name: str, base: Optional[packaging.version.Version] = None, production: bool = True)
```

Get all versions of a package from a PyPI endpoint.

Parameters

- **package_name** (*str*) –
- **base** (*Optional[packaging.version.Version]*) –
- **production** (*bool*) –

stubber.publish.stubpacker

Module Contents

Classes

<code>StubPackage</code>	Create a stub-only package for a specific version , port and board of micropython
--------------------------	---

```
class stubber.publish.stubpacker.StubPackage(package_name: str, version: str = '0.0.1', description: str = 'MicroPython stubs', stubs: Optional[List[Tuple[str, pathlib.Path]]] = None, json_data: Optional[Dict[str, Any]] = None)
```

Create a stub-only package for a specific version , port and board of micropython

properties:

- `toml_path` - the path to the `pyproject.toml` file
- `package_path` - the path to the folder where the package info will be stored ('./publish').
- `pkg_version` - the version of the package as used on PyPi (semver). Is stored directly in the `pyproject.toml` file
- `pyproject` - the contents of the `pyproject.toml` file

Parameters

- `package_name (str)` -
- `version (str)` -
- `description (str)` -
- `stubs (Optional[List[Tuple[str, pathlib.Path]]])` -
- `json_data (Optional[Dict[str, Any]])` -
- `from_json` - load the package from json
- `to_json` - return the package as json
- `create_update_pyproject_toml` - create or update the `pyproject.toml` file
- `create_readme` - create the readme file
- `create_license` - create the license file
- `copy_stubs` - copy the stubs to the package folder
- `update_included_stubs` - update the included stubs in the `pyproject.toml` file
- `create_hash` - create a hash of the package files
- `update_package_files` - combines clean, copy, and create reeadme & updates

property package_path → `pathlib.Path`

package path based on the package name and version and relative to the publish folder

Return type`pathlib.Path`**property toml_path** → `pathlib.Path`

the path to the `pyproject.toml` file

Return type`pathlib.Path`**property pkg_version** → `str`

return the version of the package

Return type`str`**property pyproject** → `Union[Dict[str, Any], None]`

parsed `pyproject.toml` or `None`

Return type`Union[Dict[str, Any], None]`**to_dict()**

return the package as a dict to store in the jsondb

need to simplify some of the Objects to allow serialisation to json - the paths to posix paths - the version (semver) to a string - toml file to list of lines

from_dict(json_data)

load the package from a dict (from the jsondb)

update_package_files()**Update the stub-only package for a specific version of micropython**

- cleans the package folder
- copies the stubs from the list of stubs.
- creates/updates the `readme` and the `license` file

copy_stubs()

Copy files from all listed stub folders to the package folder the order of the stub folders is relevant as “last copy wins”

- 1 - Copy all firmware stubs/merged to the package folder
- 2 - copy the remaining stubs to the package folder
- 3 - remove `*.py` files from the package folder

create_readme()**Create a readme file for the package**

- based on the template `readme` file
- with a list of all included stub folders added to it (not the individual stub-files)

create_license()

Create a license file for the package

- copied from the template license file

create_update_pyproject_toml()

create or update/overwrite a *pyproject.toml* file by combining a template file with the given parameters. and updating it with the pyi files included

update_included_stubs()

Add the stub files to the *pyproject.toml* file

clean()

Remove the stub files from the package folder

This is used before update the stub package, to avoid lingering stub files, and after the package has been built, to avoid needing to store files multiple times.

.*gitignore* cannot be used as this will prevent poetry from processing the files.

create_hash(include_md=True) → str

Create a SHA1 hash of all files in the package, excluding the *pyproject.toml* file itself. the hash is based on the content of the .py/.pyi and .md files in the package. if include_md is False , the .md files are not hashed, allowing the files in the packages to be compared simply As a single hash is created across all files, the files are sorted prior to hashing to ensure that the hash is stable.

A changed hash will not indicate which of the files in the package have been changed.

Return type

str

update_hashes()

Update the package hashes

is_changed() → bool

Check if the package has changed, based on the current and the stored hash

Return type

bool

bump(*, rc: int = 0) → str

bump the postrelease version of the package, and write the change to disk if rc > 1, the version is bumped to the specified release candidate

Parameters

rc (int) –

Return type

str

run_poetry(parameters: List[str]) → bool

Run a poetry commandline in the package folder. Note: this may write some output to the console ('All set!')

Parameters

parameters (List[str]) –

Return type

bool

write_package_json()

check() → bool

check if the package is valid by running *poetry check* Note: this will write some output to the console ('All set!')

Return type

bool

build() → bool

build the package by running *poetry build*

Return type

bool

publish(*production=False*) → bool

Return type

bool

stubber.rst

Submodules

stubber.rst.classsort

Sort list of classes in parent-child order note that this does not take multiple inheritance into account ref : <https://stackoverflow.com/questions/34964878/python-generate-a-dictionarytree-from-a-list-of-tuples/35049729#35049729> with modification

Module Contents

Functions

sort_classes(classes)

sort a list of classes to respect the parent-child order

stubber.rst.classsort.sort_classes(classes: List[str])

sort a list of classes to respect the parent-child order

Parameters

classes (List[str]) –

stubber.rst.lookup

this is an list with manual overrides for function returns that could not efficiently be determined from their docstring description Format: a dictionary with : - key = module.[class.]function name - value : two-tuple with (return type , priority)

Module Contents

```
stubber.rst.lookup.U_MODULES = ['os', 'time', 'array', 'binascii', 'io', 'json',
'select', 'socket', 'ssl', 'struct', 'zlib']

stubber.rst.lookup.RST_DOC_FIXES = [[['.. method:: match.', '.. method:: Match.'], [
'match.end', ' ...'

stubber.rst.lookup.DOCSTUB_SKIP = ['uasyncio.rst', 'builtins.rst', 're.rst']

stubber.rst.lookup.LOOKUP_LIST

stubber.rst.lookup.NONE_VERBS = ['Activate ', 'Build a ', 'Cancel ', 'Clear ', 'Close ',
'cancel ', 'Configure ', 'Connect ', ...

stubber.rst.lookup MODULE_GLUE

stubber.rst.lookup.PARAM_FIXES = [['\\*', '*'], ['\\**', '*'], ['/*', '*'], ["param",
'param'], ['lambda', 'lambda_fn'], ...

stubber.rst.lookup CHILD_PARENT_CLASS

stubber.rst.output_dict
```

ModuleSourceDict represents a source file with the following components

- docstr
- version
- comment
- typing
- Optional: list of constants
- optional: ClassSourcedicts
- optional: FunctionSourcedicts
- optional: individual lines of code

ClassSourceDict represents a source file with the following components

- comment
- class
- docstr
- Optional: list of constants
- `__init__`: class signature
- optional: FunctionSourcedicts
- optional: individual lines of code

FunctionSourceDict represents a source file with the following components

- # comments - todo
- optional: decorator

- def - function definition
- docstr
- constants
- body - ...
- optional: individual lines of code

SourceDict is the ‘base class’

Module Contents

Classes

<code>SourceDict</code>	(abstract) dict to store source components respecting parent child dependencies and proper definition order
<code>ModuleSourceDict</code>	(abstract) dict to store source components respecting parent child dependencies and proper definition order
<code>ClassSourceDict</code>	(abstract) dict to store source components respecting parent child dependencies and proper definition order
<code>FunctionSourceDict</code>	(abstract) dict to store source components respecting parent child dependencies and proper definition order

`class stubber.rst.output_dict.SourceDict(base: List, indent: int = 0, body: int = 0, lf: str = '\n')`

Bases: `OrderedDict`

(abstract) dict to store source components respecting parent child dependencies and proper definition order

Parameters

- `base (List)` –
- `indent (int)` –
- `body (int)` –
- `lf (str)` –

`__str__()` → `str`

convert the OD into a string

Return type

`str`

`__add__(dict: SourceDict)`

Parameters

`dict (SourceDict)` –

`add_docstr(docstr: Union[str, List[str]], extra: int = 0)`

Parameters

- `docstr (Union[str, List[str]])` –
- `extra (int)` –

add_comment(*line: Union[str, List[str]]*)

Add a comment, or list of comments, to this block.

Parameters**line** (*Union[str, List[str]]*) –**add_constant**(*line: str, autoindent: bool = True*)

add constant to the constant scope of this block

Parameters

- **line** (*str*) –

- **autoindent** (*bool*) –

add_constant_smart(*name: str, type: str = 'Any', docstr: List[str] = [], autoindent: bool = True*)

add literal / constant to the constant scope of this block, or a class in this block

Parameters

- **name** (*str*) –

- **type** (*str*) –

- **docstr** (*List[str]*) –

- **autoindent** (*bool*) –

abstract find(*name: str*) → *Union[str, None]***Parameters****name** (*str*) –**Return type***Union[str, None]***add_line**(*line: str, autoindent: bool = True*)**Parameters**

- **line** (*str*) –

- **autoindent** (*bool*) –

index(*key: str*)**Parameters****key** (*str*) –**class stubber.rst.output_dict.ModuleSourceDict**(*name: str, indent=0, lf: str = '\n'*)Bases: *SourceDict*

(abstract) dict to store source components respecting parent child dependencies and proper definition order

Parameters

- **name** (*str*) –

- **lf** (*str*) –

sort()

make sure all classdefs are in order

__str__()

convert the OD into a string

find(*name*: str) → Union[str, None]

find a classnode based on the name with or without the superclass

Parameters

name (str) –

Return type

 Union[str, None]

classes()

get a list of the class names in parent-child order

add_import(*imports*: Union[str, List[str]])

add a [list of] imports this module

Parameters

imports (Union[str, List[str]]) –

class stubber.rst.output_dict.**ClassSourceDict**(*name*: str, *, *docstr*: List[str] = [""" """], *init*: str = "", *indent*: int = 0, *lf*='\n')

Bases: *SourceDict*

(abstract) dict to store source components respecting parent child dependencies and proper definition order

Parameters

- **name** (str) –
- **docstr** (List[str]) –
- **init** (str) –
- **indent** (int) –

class stubber.rst.output_dict.**FunctionSourceDict**(*name*: str, *, *definition*: List[str] = [], *docstr*: List[str] = [""" """], *indent*: int = 0, *decorators*: List[str] = [], *lf*='\n')

Bases: *SourceDict*

(abstract) dict to store source components respecting parent child dependencies and proper definition order

Parameters

- **name** (str) –
- **definition** (List[str]) –
- **docstr** (List[str]) –
- **indent** (int) –
- **decorators** (List[str]) –

stubber.rst.report_return

Work in Progress

build test and % report Will need to be updated after new_output has been implemented.

Module Contents

Functions

`process(folder, pattern)`

`stubber.rst.report_return.process(folder: pathlib.Path, pattern: str)`

Parameters

- `folder (pathlib.Path) –`
- `pattern (str) –`

stubber.rst.rst_utils

Tries to determine the return type by parsing the docstring and the function signature

- if the signature contains a return type -> <something> then that is returned
- **check a lookup dictionary of type overrides,**
if the functionnae is listed, then use the override
- **use re to find phrases such as:**
 - ‘Returns’
 - ‘Gets’
- docstring is joined without newlines to simplify parsing
- then parses the docstring to find references to known types and give them a rating though a hand coded model ()
- builds a list return type candidates
- selects the highest ranking candidate
- the default Type is ‘Any’

to do:

- **regex :**
 - ‘With no arguments the frequency in Hz is returned.’
 - ‘Get or set’ -> indicates overloaded/optional return Union[None|...]
 - add regex for ‘Query’ ^ Otherwise, query current state if no argument is provided. ^
- **regex :**
 - ‘With no arguments the frequency in Hz is returned.’

- ‘Get or set’ → indicates overloaded/optional return Union[None, ...]
- add regex for ‘Query’ ^ Otherwise, query current state if no argument is provided. ^
- **try if an Azure Machine Learning works as well**
<https://docs.microsoft.com/en-us/azure/machine-learning/quickstart-create-resources>
-

Module Contents

Functions

<code>simple_candidates(type, match_string, keywords[, ...])</code>	find and rate possible types and confidence weighting for simple types.
<code>compound_candidates(type, match_string, keywords[, ...])</code>	find and rate possible types and confidence weighting for compound types that can have a subscription.
<code>object_candidates(match_string[, rate, exclude])</code>	find and rate possible types and confidence weighting for Object types.
<code>distill_return(→ List[Dict])</code>	Find return type and confidence.
<code>return_type_from_context(*, docstring, signature, module)</code>	
<code>_type_from_context(*, docstring, signature, module[, ...])</code>	Determine the return type of a function or method based on:

Attributes

TYPING_IMPORT

`stubber.rst.rst_utils.TYPING_IMPORT :List[str] = ['from typing import IO, Any, Callable, Coroutine, Dict, Generator, Iterator, List, NoReturn,...`

`stubber.rst.rst_utils.simple_candidates(type: str, match_string: str, keywords: List[str], rate: float = 0.5, exclude: List[str] = [])`

find and rate possible types and confidence weighting for simple types. Case sensitive

Parameters

- **type** (`str`) –
- **match_string** (`str`) –
- **keywords** (`List[str]`) –
- **rate** (`float`) –
- **exclude** (`List[str]`) –

`stubber.rst.rst_utils.compound_candidates(type: str, match_string: str, keywords: List[str], rate: float = 0.85, exclude: List[str] = [])`

find and rate possible types and confidence weighting for compound types that can have a subscription. Case sensitive

Parameters

- **type** (*str*) –
- **match_string** (*str*) –
- **keywords** (*List[str]*) –
- **rate** (*float*) –
- **exclude** (*List[str]*) –

```
stubber.rst.rst_utils.object_candidates(match_string: str, rate: float = 0.81, exclude: List[str] = ['IRQ'])
```

find and rate possible types and confidence weighting for Object types. Case sensitive

Parameters

- **match_string** (*str*) –
- **rate** (*float*) –
- **exclude** (*List[str]*) –

```
stubber.rst.rst_utils.distill_return(return_text: str) → List[Dict]
```

Find return type and confidence. Returns a list of possible types and confidence weighting. {

```
    type :str # the return type
    confidence: float # the confidence between 0.0 and 1
    match: Optional[str]
    # for debugging : the reason the match was made
```

```
}
```

Parameters

```
    return_text (str) –
```

Return type

```
    List[Dict]
```

```
stubber.rst.rst_utils.return_type_from_context(*, docstring: Union[str, List[str]], signature: str,
                                              module: str, literal: bool = False)
```

Parameters

- **docstring** (*Union[str, List[str]]*) –
- **signature** (*str*) –
- **module** (*str*) –
- **literal** (*bool*) –

```
stubber.rst.rst_utils._type_from_context(*, docstring: Union[str, List[str]], signature: str, module: str,
                                         literal: bool = False)
```

Determine the return type of a function or method based on:

- the function signature
- the terminology used in the docstring

Logic: - if the signature contains a return type → <something> then that is returned - use re to find phrases such as:

- ‘Returns ‘
- ‘Gets ‘

- docstring is joined without newlines to simplify parsing
- then parses the docstring to find references to known types and give them a rating though a hand coded model ()
- builds a list return type candidates
- selects the highest ranking candidate
- the default Type is ‘Any’

Parameters

- **docstring** (`Union[str, List[str]]`) –
- **signature** (`str`) –
- **module** (`str`) –
- **literal** (`bool`) –

Package Contents

Classes

<code>SourceDict</code>	(abstract) dict to store source components respecting parent child dependencies and proper definition order
<code>ModuleSourceDict</code>	(abstract) dict to store source components respecting parent child dependencies and proper definition order
<code>ClassSourceDict</code>	(abstract) dict to store source components respecting parent child dependencies and proper definition order
<code>FunctionSourceDict</code>	(abstract) dict to store source components respecting parent child dependencies and proper definition order

Functions

<code>sort_classes(classes)</code>	sort a list of classes to respect the parent-child order
<code>simple_candidates(type, match_string, keywords[, ...])</code>	find and rate possible types and confidence weighting for simple types.
<code>compound_candidates(type, match_string, keywords[, ...])</code>	find and rate possible types and confidence weighting for compound types that can have a subscription.
<code>object_candidates(match_string[, rate, exclude])</code>	find and rate possible types and confidence weighting for Object types.
<code>distill_return(→ List[Dict])</code>	Find return type and confidence.
<code>return_type_from_context(*, docstring, signature, module)</code>	
<code>_type_from_context(*, docstring, signature, module[, ...])</code>	Determine the return type of a function or method based on:

Attributes

`LOOKUP_LIST`

`NONE_VERBS`

`CHILD_PARENT_CLASS`

`PARAM_FIXES`

`MODULE_GLUE`

`RST_DOC_FIXES`

`DOCSTUB_SKIP`

`U_MODULES`

`TYPING_IMPORT`

`__all__`

`stubber.rst.sort_classes(classes: List[str])`

sort a list of classes to respect the parent-child order

Parameters

`classes (List[str]) –`

`stubber.rst.LOOKUP_LIST`

`stubber.rst.NONE_VERBS = ['Activate ', 'Build a ', 'Cancel ', 'Clear ', 'Close ', 'cancel ', 'Configure ', 'Connect ', ...]`

`stubber.rst.CHILD_PARENT_CLASS`

`stubber.rst.PARAM_FIXES = [['*', '*'], ['**', '*'], ['/*', '*'], ["param", "param"], ['lambda', 'lambda_fn'], ...]`

`stubber.rst.MODULE_GLUE`

`stubber.rst.RST_DOC_FIXES = [['.. method:: match.', '.. method:: Match.'], ['match.end', ' ...']]`

`stubber.rst.DOCSTUB_SKIP = ['uasyncio.rst', 'builtins.rst', 're.rst']`

`stubber.rst.U_MODULES = ['os', 'time', 'array', 'binascii', 'io', 'json', 'select', 'socket', 'ssl', 'struct', 'zlib']`

`class stubber.rst.SourceDict(base: List, indent: int = 0, body: int = 0, lf: str = '\n')`

Bases: `OrderedDict`

(abstract) dict to store source components respecting parent child dependencies and proper definition order

Parameters

- **base** (*List*) –
- **indent** (*int*) –
- **body** (*int*) –
- **lf** (*str*) –

__str__() → *str*
convert the OD into a string

Return type
str

__add__(dict: SourceDict)

Parameters
dict (*SourceDict*) –

add_docstr(docstr: Union[str, List[str]], extra: int = 0)

Parameters

- **docstr** (*Union[str, List[str]]*) –
- **extra** (*int*) –

add_comment(line: Union[str, List[str]])
Add a comment, or list of comments, to this block.

Parameters
line (*Union[str, List[str]]*) –

add_constant(line: str, autoindent: bool = True)
add constant to the constant scope of this block

Parameters

- **line** (*str*) –
- **autoindent** (*bool*) –

add_constant_smart(name: str, type: str = 'Any', docstr: List[str] = [], autoindent: bool = True)
add literal / constant to the constant scope of this block, or a class in this block

Parameters

- **name** (*str*) –
- **type** (*str*) –
- **docstr** (*List[str]*) –
- **autoindent** (*bool*) –

abstract find(name: str) → Union[str, None]

Parameters
name (*str*) –

Return type
Union[str, None]

add_line(*line: str*, *autoindent: bool* = *True*)

Parameters

- **line** (*str*) –
- **autoindent** (*bool*) –

index(*key: str*)

Parameters

- **key** (*str*) –

class stubber.rst.ModuleSourceDict(*name: str*, *indent=0*, *lf: str* = '\n')

Bases: *SourceDict*

(abstract) dict to store source components respecting parent child dependencies and proper definition order

Parameters

- **name** (*str*) –
- **lf** (*str*) –

sort()

make sure all classdefs are in order

__str__()

convert the OD into a string

find(*name: str*) → Union[*str*, None]

find a classnode based on the name with or without the superclass

Parameters

- **name** (*str*) –

Return type

Union[*str*, None]

classes()

get a list of the class names in parent-child order

add_import(*imports: Union[str, List[str]]*)

add a [list of] imports this module

Parameters

- **imports** (*Union[str, List[str]]*) –

class stubber.rst.ClassSourceDict(*name: str*, *, *docstr: List[str]* = [''']'', *init: str* = '', *indent: int* = 0, *lf*='\n')

Bases: *SourceDict*

(abstract) dict to store source components respecting parent child dependencies and proper definition order

Parameters

- **name** (*str*) –
- **docstr** (*List[str]*) –
- **init** (*str*) –
- **indent** (*int*) –

```
class stubber.rst.FunctionSourceDict(name: str, *, definition: List[str] = [], docstr: List[str] = ['''], indent: int = 0, decorators: List[str] = [], lf='\\n')
```

Bases: *SourceDict*

(abstract) dict to store source components respecting parent child dependencies and proper definition order

Parameters

- **name** (*str*) –
- **definition** (*List[str]*) –
- **docstr** (*List[str]*) –
- **indent** (*int*) –
- **decorators** (*List[str]*) –

```
stubber.rst.simple_candidates(type: str, match_string: str, keywords: List[str], rate: float = 0.5, exclude: List[str] = [])
```

find and rate possible types and confidence weighting for simple types. Case sensitive

Parameters

- **type** (*str*) –
- **match_string** (*str*) –
- **keywords** (*List[str]*) –
- **rate** (*float*) –
- **exclude** (*List[str]*) –

```
stubber.rst.compound_candidates(type: str, match_string: str, keywords: List[str], rate: float = 0.85, exclude: List[str] = [])
```

find and rate possible types and confidence weighting for compound types that can have a subscription. Case sensitive

Parameters

- **type** (*str*) –
- **match_string** (*str*) –
- **keywords** (*List[str]*) –
- **rate** (*float*) –
- **exclude** (*List[str]*) –

```
stubber.rst.object_candidates(match_string: str, rate: float = 0.81, exclude: List[str] = ['IRQ'])
```

find and rate possible types and confidence weighting for Object types. Case sensitive

Parameters

- **match_string** (*str*) –
- **rate** (*float*) –
- **exclude** (*List[str]*) –

```
stubber.rst.distill_return(return_text: str) → List[Dict]
```

Find return type and confidence. Returns a list of possible types and confidence weighting. {

type :str # the return type
confidence: float # the confidence between 0.0 and 1
match: Optional[str]
for debugging : the reason the match was made

}

Parameters

return_text (*str*) –

Return type

 List[Dict]

stubber.rst.**return_type_from_context**(*, docstring: Union[str, List[str]], signature: str, module: str, literal: bool = False)

Parameters

- **docstring** (Union[str, List[str]]) –
- **signature** (*str*) –
- **module** (*str*) –
- **literal** (*bool*) –

stubber.rst._**type_from_context**(*, docstring: Union[str, List[str]], signature: str, module: str, literal: bool = False)

Determine the return type of a function or method based on:

- the function signature
- the terminology used in the docstring

Logic: - if the signature contains a return type → <something> then that is returned - use re to find phrases such as:

- ‘Returns ‘
- ‘Gets ‘
- docstring is joined without newlines to simplify parsing
- then parses the docstring to find references to known types and give them a rating through a hand coded model ()
- builds a list return type candidates
- selects the highest ranking candidate
- the default Type is ‘Any’

Parameters

- **docstring** (Union[str, List[str]]) –
- **signature** (*str*) –
- **module** (*str*) –
- **literal** (*bool*) –

stubber.rst.TYPING_IMPORT :List[str] = ['from typing import IO, Any, Callable, Coroutine, Dict, Generator, Iterator, List, NoReturn, ...

stubber.rst.__all__

stubber.tools**Submodules****stubber.tools.manifestfile****Module Contents****Classes**

<i>ManifestFile</i>	Process a firmware manifest files
---------------------	-----------------------------------

exception stubber.tools.manifestfile.ManifestFileErrorBases: `Exception`

Common base class for all non-exit exceptions.

class stubber.tools.manifestfile.ManifestFile(*mode: int*, *path_vars: Optional[Dict[str, str]] = None*)

Process a firmware manifest files

params:

mode: MODE_*. The mode to process the manifest in, MODE_FREEZE or MODE_COMPILE.
path_vars: dict of path variables to substitute in the manifest.

{

“MPY_DIR”: (str) path to the micropython repo, “MPY_LIB_DIR”: (str) path to the micropython-lib (sub)repo, “PORT_DIR”: (str) full path to the port directory, “BOARD_DIR”: (str) full path to the board directory,

or the same as PORT_DIR if no port, or the location of a variant’s manifest file

}

Parameters

- **mode** (`int`) –
- **path_vars** (`Optional[Dict[str, str]]`) –

_resolve_path(path)**_manifest_globals(kwargs)****files()****execute(manifest_file)****_add_file(full_path, target_path, kind=KIND_AUTO, opt=None)****_search(base_path, package_path, files, exts, kind, opt=None, strict=False)****metadata(description=None, version=None, license=None)**

From within a manifest file, use this to set the metadata for the package described by current manifest.

After executing a manifest file (via execute()), call this to obtain the metadata for the top-level manifest file.

include(*manifest_path*, *top_level=False*, ***kwargs*)

Include another manifest.

The manifest argument can be a string (filename) or an iterable of strings.

Relative paths are resolved with respect to the current manifest file.

If the path is to a directory, then it implicitly includes the manifest.py file inside that directory.

Optional kwargs can be provided which will be available to the included script via the *options* variable.

e.g. include("path.py", extra_features=True)

in path.py:

 options.defaults(standard_features=True)

 # freeze minimal modules. if options.standard_features:

 # freeze standard modules.

if options.extra_features:

 # freeze extra modules.

require(*name*, *version=None*, *unix_ffi=False*, ***kwargs*)

Require a module by name from micropython-lib.

Optionally specify unix_ffi=True to use a module from the unix-ffi directory.

package(*package_path*, *files=None*, *base_path='.'*, *opt=None*)

Define a package, optionally restricting to a set of files.

Simple case, a package in the current directory:

 package("foo")

will include all .py files in foo, and will be stored as foo/bar/baz.py.

If the package isn't in the current directory, use base_path:

 package("foo", base_path="src")

To restrict to certain files in the package use files (note: paths should be relative to the package):

 package("foo", files=["bar/baz.py"])

module(*module_path*, *base_path='.'*, *opt=None*)

Include a single Python file as a module.

If the file is in the current directory:

 module("foo.py")

Otherwise use base_path to locate the file:

 module("foo.py", "src/drivers")

_freeze_internal(*path*, *script*, *exts*, *kind*, *opt*)

freeze(*path*, *script=None*, *opt=None*)

Freeze the input, automatically determining its type. A .py script will be compiled to a .mpy first then frozen, and a .mpy file will be frozen directly.

path must be a directory, which is the base directory to _search for files from. When importing the resulting frozen modules, the name of the module will start after *path*, ie *path* is excluded from the module name.

If *path* is relative, it is resolved to the current manifest.py. Use \$(MPY_DIR), \$(MPY_LIB_DIR), \$(PORT_DIR), \$(BOARD_DIR) if you need to access specific paths.

If *script* is None all files in *path* will be frozen.

If *script* is an iterable then `freeze()` is called on all items of the iterable (with the same *path* and *opt* passed through).

If *script* is a string then it specifies the file or directory to freeze, and can include extra directories before the file or last directory. The file or directory will be _searched for in *path*. If *script* is a directory then all files in that directory will be frozen.

opt is the optimisation level to pass to mpy-cross when compiling .py to .mpy.

freeze_as_str(*path*)

Freeze the given *path* and all .py scripts within it as a string, which will be compiled upon import.

freeze_as_mpy(*path*, *script=None*, *opt=None*)

Freeze the input (see above) by first compiling the .py scripts to .mpy files, then freezing the resulting .mpy files.

freeze_mpy(*path*, *script=None*, *opt=None*)

Freeze the input (see above), which must be .mpy files that are frozen directly.

stubber.tools.pyboard

pyboard interface

This module provides the Pyboard class, used to communicate with and control a MicroPython device over a communication channel. Both real boards and emulated devices (e.g. running in QEMU) are supported. Various communication channels are supported, including a serial connection, telnet-style network connection, external process connection.

Example usage:

```
import pyboard pyb = pyboard.Pyboard('/dev/ttyACM0')
```

Or:

```
pyb = pyboard.Pyboard('192.168.1.1')
```

Then:

```
pyb.enter_raw_repl() pyb.exec('import pyb') pyb.exec('pyb.LED(1).on()') pyb.exit_raw_repl()
```

Note: if using Python2 then `pyb.exec` must be written as **pyb.exec_**. To run a script from the local machine on the board and print out the results:

```
import pyboard pyboard.execfile('test.py', device='/dev/ttyACM0')
```

This script can also be run directly. To execute a local script, use:

```
./pyboard.py test.py
```

Or:

```
python pyboard.py test.py
```

Module Contents

Classes

TelnetToSerial

<code>ProcessToSerial</code>	Execute a process and emulate serial connection using its stdin/stdout.
------------------------------	---

<code>ProcessPtyToTerminal</code>	Execute a process which creates a PTY and prints slave PTY as
-----------------------------------	---

Pyboard

Functions

`stdout_write_bytes(b)`

`execfile(filename[, device, baudrate, user, password])`

`filesystem_command(pyb, args)`

`main()`

Attributes

`stdout`

`_injected_import_hook_code`

`stubber.tools.pyboard.stdout`

`stubber.tools.pyboard.stdout_write_bytes(b)`

`exception stubber.tools.pyboard.PyboardError`

Bases: `Exception`

Common base class for all non-exit exceptions.

`class stubber.tools.pyboard.TelnetToSerial(ip, user, password, read_timeout=None)`

`__del__()`

`close()`

`read(size=1)`

`write(data)`

```
inWaiting()

class stubber.tools.pyboard.ProcessToSerial(cmd)
    Execute a process and emulate serial connection using its stdin/stdout.

    close()
    read(size=1)
    write(data)
    inWaiting()

class stubber.tools.pyboard.ProcessPtyToTerminal(cmd)
    Execute a process which creates a PTY and prints slave PTY as first line of its output, and emulate serial connection using this PTY.

    close()
    read(size=1)
    write(data)
    inWaiting()

class stubber.tools.pyboard.Pyboard(device, baudrate=115200, user='micro', password='python', wait=0, exclusive=True)
    close()
    read_until(min_num_bytes, ending, timeout=10, data_consumer=None)
    enter_raw_repl(soft_reset=True)
    exit_raw_repl()
    follow(timeout, data_consumer=None)
    raw_paste_write(command_bytes)
    exec_raw_no_follow(command)
    exec_raw(command, timeout=10, data_consumer=None)
    eval(expression)
    exec_(command, data_consumer=None)
    execfile(filename)
    get_time()
    fs_ls(src)
    fs_cat(src, chunk_size=256)
    fs_get(src, dest, chunk_size=256)
    fs_put(src, dest, chunk_size=256)
```

```
fs_mkdir(dir)
fs_rmdir(dir)
fs_rm(src)

stubber.tools.pyboard.execfile(filename, device='/dev/ttyACM0', baudrate=115200, user='micro',
                                password='python')

stubber.tools.pyboard.filesystem_command(pyb, args)

stubber.tools.pyboard._injected_import_hook_code = Multiline-String

1 import uos, uio
2 class _FS:
3     class File(uio.IOBase):
4         def __init__(self):
5             self.off = 0
6         def ioctl(self, request, arg):
7             return 0
8         def readinto(self, buf):
9             buf[:] = memoryview(_injected_buf)[self.off:self.off + len(buf)]
10            self.off += len(buf)
11            return len(buf)
12        mount = umount = chdir = lambda *args: None
13        def stat(self, path):
14            if path == '_injected.mpy':
15                return tuple(0 for _ in range(10))
16            else:
17                raise OSError(-2) # ENOENT
18        def open(self, path, mode):
19            return self.File()
20    uos.mount(_FS(), '/_')
21    uos.chdir('/_')
22    from _injected import *
23    uos.umount('/_')
24    del _injected_buf, _FS

stubber.tools.pyboard.main()
```

stubber.utils

Submodules

stubber.utils.config

Module Contents

Classes

StubberConfig

stubber configuration class

Functions

<code>readconfig([filename, prefix, must_exist])</code>	read the configuration from the pyproject.toml file
---	---

Attributes

<code>CONFIG</code>	stubber configuration singleton
---------------------	---------------------------------

`class stubber.utils.config.StubberConfig(section_name: Optional[str] = None, sources: Optional[List[typedconfig.source.ConfigSource]] = None, provider: Optional[typedconfig.provider.ConfigProvider] = None)`

Bases: `typedconfig.config.Config`

stubber configuration class

Parameters

- `section_name` (`Optional[str]`) –
- `sources` (`Optional[List[typedconfig.source.ConfigSource]]`) –
- `provider` (`Optional[typedconfig.provider.ConfigProvider]`) –

`stub_path`

a Path to the stubs directory

`fallback_path`

a Path to the fallback stubs directory

`repo_path`

a Path to the repo directory

`mpy_path`

a Path to the micropython folder in the repos directory

`mpy_lib_path`

a Path to the micropython-lib folder in the repos directory

`publish_path`

a Path to the folder where all stub publication artefacts are stored

`template_path`

a Path to the publication folder that has the template files

`STABLE_VERSION = 1.19.1`

last published stable

`ALL VERSIONS = ['1.17', '1.18', '1.19', '1.19.1']`

list of recent versions

`post_read_hook() → dict`

This method can be overridden to modify config values after `read()` is called. :rtype: A dict of key-value pairs containing new configuration values for key() items in this Config class

Return type

dict

`stubber.utils.config.readconfig(filename: str = 'pyproject.toml', prefix: str = 'tool.', must_exist: bool = True)`

read the configuration from the pyproject.toml file

Parameters

- `filename (str) –`
- `prefix (str) –`
- `must_exist (bool) –`

`stubber.utils.config.CONFIG`

stubber configuration singleton

`stubber.utils.makeversionhdr`

Code from micropython project and adapted to use the same versioning scheme

Module Contents

Functions

<code>get_version_info_from_git([path])</code>	return the version info from the git repository specified.
<code>get_version_build_from_git([path])</code>	

`stubber.utils.makeversionhdr.get_version_info_from_git(path: pathlib.Path = Path.cwd())`

return the version info from the git repository specified. returns: a 2-tuple containing git_tag, short_hash

Parameters

`path (pathlib.Path) –`

`stubber.utils.makeversionhdr.get_version_build_from_git(path: pathlib.Path = Path.cwd())`

Parameters

`path (pathlib.Path) –`

`stubber.utils.manifest`

Module Contents

Functions

<code>manifest(→ dict)</code>	create a new empty manifest dict
<code>make_manifest(→ bool)</code>	Create a <code>module.json</code> manifest listing all files/stubs in this folder and subfolders.

```
stubber.utils.manifest.manifest(family: str = 'micropython', subtype: str = 'frozen', machine: Optional[str] = None, port: Optional[str] = None, platform: Optional[str] = None, sysname: Optional[str] = None, nodename: Optional[str] = None, version: Optional[str] = None, release: Optional[str] = None, firmware: Optional[str] = None) → dict
```

create a new empty manifest dict

Parameters

- **family** (str) –
- **subtype** (str) –
- **machine** (Optional[str]) –
- **port** (Optional[str]) –
- **platform** (Optional[str]) –
- **sysname** (Optional[str]) –
- **nodename** (Optional[str]) –
- **version** (Optional[str]) –
- **release** (Optional[str]) –
- **firmware** (Optional[str]) –

Return type

dict

```
stubber.utils.manifest.make_manifest(folder: pathlib.Path, family: str, port: str, version: str, release: str = "", subtype: str = "", board: str = "") → bool
```

Create a *module.json* manifest listing all files/stubs in this folder and subfolders.

Parameters

- **folder** (pathlib.Path) –
- **family** (str) –
- **port** (str) –
- **version** (str) –
- **release** (str) –
- **subtype** (str) –
- **board** (str) –

Return type

bool

stubber.utils.my_version

find the version of this package

Module Contents

`stubber.utils.my_version.__version__ = 0.0.0`

`stubber.utils.my_version.__version__`

stubber.utils.post

Pre/Post Processing for createstubs.py

Module Contents

Functions

<code>do_post_processing(stub_paths, pyi, black)</code>	Common post processing
<code>run_black(path[, capture_output])</code>	run black to format the code / stubs
<code>run_autoflake(path[, capture_output, progress_pyi])</code>	run autoflake to remove unused imports

`stubber.utils.post.do_post_processing(stub_paths: List[pathlib.Path], pyi: bool, black: bool)`

Common post processing

Parameters

- **stub_paths** (`List[pathlib.Path]`) –
- **pyi** (`bool`) –
- **black** (`bool`) –

`stubber.utils.post.run_black(path: pathlib.Path, capture_output=False)`

run black to format the code / stubs

Parameters

`path (pathlib.Path)` –

`stubber.utils.post.run_autoflake(path: pathlib.Path, capture_output=False, progress_pyi=False)`

run autoflake to remove unused imports needs to be run BEFORE black otherwise it does not recognize long import from `s. note: is run file-by-file to include processing .pyi files

Parameters

`path (pathlib.Path)` –

stubber.utils.repos**Module Contents****Functions**

<code>switch(tag, *, mpy_path, mpy_lib_path)</code>	Switch to a specific version of the micropython repos.
<code>read_micropython_lib_commits([filename])</code>	Read a csv with the micropython version and matching micropython-lib commit-hashes
<code>match_lib_with_mpy(version_tag, lib_path)</code>	

`stubber.utils.repos.switch(tag: str, *, mpy_path: pathlib.Path, mpy_lib_path: pathlib.Path)`

Switch to a specific version of the micropython repos.

Specify the version with `-tag` or `-version` to specify the version tag of the MicroPython repo. The Micropython-lib repo will be checked out to a commit that corresponds in time to that version tag, in order to allow non-current versions to be stubbed correctly.

The repos must be cloned already

Parameters

- `tag (str)` –
- `mpy_path (pathlib.Path)` –
- `mpy_lib_path (pathlib.Path)` –

`stubber.utils.repos.read_micropython_lib_commits(filename='data/micropython_tags.csv')`

Read a csv with the micropython version and matching micropython-lib commit-hashes these can be used to make sure that the correct micropython-lib version is checked out.

filename is relative to the ‘stubber’ package

TODO: it would be nice if micropython-lib had matching commit-tags

git for-each-ref --sort=creatordate --format '%(refname) %(creatordate)' refs/tags

`stubber.utils.repos.match_lib_with_mpy(version_tag: str, lib_path: pathlib.Path)`

Parameters

- `version_tag (str)` –
- `lib_path (pathlib.Path)` –

stubber.utils.stubmaker**Module Contents**

Functions

<code>generate_pyi_from_file(→ bool)</code>	Generate a .pyi stubfile from a single .py module using mypy/stubgen
<code>generate_pyi_files(→ bool)</code>	Generate typeshed files for all scripts in a folder using mypy/stubgen

Attributes

`STUBGEN_OPT`

`stubber.utils.stubmaker.STUBGEN_OPT`

`stubber.utils.stubmaker.generate_pyi_from_file(file: pathlib.Path) → bool`

Generate a .pyi stubfile from a single .py module using mypy/stubgen

Parameters

`file (pathlib.Path) –`

Return type

`bool`

`stubber.utils.stubmaker.generate_pyi_files(modules_folder: pathlib.Path) → bool`

Generate typeshed files for all scripts in a folder using mypy/stubgen

Returns: False if one or more files had an issue generating a stub

Parameters

`modules_folder (pathlib.Path) –`

Return type

`bool`

`stubber.utils.typed_config_toml`

`typed-config-toml`

Extend typed-config to read configuration from .toml files

Module Contents

Classes

<code>TomlConfigSource</code>	Read configuration from a .toml file
-------------------------------	--------------------------------------

`class stubber.utils.typed_config_toml.TomlConfigSource(filename: str, prefix: Optional[str] = None, must_exist: bool = True)`

Bases: `typedconfig.source.ConfigSource`

Read configuration from a `.toml` file

`prefix` is used to allow for toml nested configuration a common prefix = “`tool`.”

```
` #pyproject.toml [tool.deadparrot] species = "Norwegian Blue" state = "resting"
details = ["pinging", "Lovely plumage", "3"]` Use the below code to retrieve: ` # TODO sample
code`
```

Parameters

- `filename` (`str`) –
- `prefix` (*Optional*[`str`]) –
- `must_exist` (`bool`) –

`get_config_value(section_name: str, key_name: str) → Optional[str]`

Parameters

- `section_name` (`str`) –
- `key_name` (`str`) –

Return type

`Optional[str]`

`stubber.utils.versions`

Module Contents

Functions

<code>clean_version(version, *[build, patch, commit, ...])</code>	Clean up and transform the many flavours of versions
<code>micropython_versions([start])</code>	

`stubber.utils.versions.clean_version(version: str, *, build: bool = False, patch: bool = False, commit: bool = False, drop_v: bool = False, flat: bool = False)`

Clean up and transform the many flavours of versions

Parameters

- `version` (`str`) –
- `build` (`bool`) –
- `patch` (`bool`) –
- `commit` (`bool`) –
- `drop_v` (`bool`) –
- `flat` (`bool`) –

`stubber.utils.versions.micropython_versions(start='v1.9.2')`

Package Contents

Functions

<code>make_manifest(→ bool)</code>	Create a <code>module.json</code> manifest listing all files/stubs in this folder and subfolders.
<code>manifest(→ dict)</code>	create a new empty manifest dict
<code>do_post_processing(stub_paths, pyi, black)</code>	Common post processing
<code>generate_pyi_files(→ bool)</code>	Generate typeshed files for all scripts in a folder using mypy/stubgen
<code>generate_pyi_from_file(→ bool)</code>	Generate a .pyi stubfile from a single .py module using mypy/stubgen
<code>clean_version(version, *[build, patch, commit, ...])</code>	Clean up and transform the many flavours of versions

`stubber.utils.make_manifest(folder: pathlib.Path, family: str, port: str, version: str, release: str = "", subtype: str = "", board: str = "") → bool`

Create a `module.json` manifest listing all files/stubs in this folder and subfolders.

Parameters

- **folder** (`pathlib.Path`) –
- **family** (`str`) –
- **port** (`str`) –
- **version** (`str`) –
- **release** (`str`) –
- **subtype** (`str`) –
- **board** (`str`) –

Return type

`bool`

`stubber.utils.manifest(family: str = 'micropython', subtype: str = 'frozen', machine: Optional[str] = None, port: Optional[str] = None, platform: Optional[str] = None, sysname: Optional[str] = None, nodename: Optional[str] = None, version: Optional[str] = None, release: Optional[str] = None, firmware: Optional[str] = None) → dict`

create a new empty manifest dict

Parameters

- **family** (`str`) –
- **subtype** (`str`) –
- **machine** (`Optional[str]`) –
- **port** (`Optional[str]`) –
- **platform** (`Optional[str]`) –
- **sysname** (`Optional[str]`) –
- **nodename** (`Optional[str]`) –
- **version** (`Optional[str]`) –

- **release** (*Optional[str]*) –
- **firmware** (*Optional[str]*) –

Return type

dict

`stubber.utils.do_post_processing(stub_paths: List[pathlib.Path], pyi: bool, black: bool)`

Common post processing

Parameters

- **stub_paths** (*List[pathlib.Path]*) –
- **pyi** (*bool*) –
- **black** (*bool*) –

`stubber.utils.generate_pyi_files(modules_folder: pathlib.Path) → bool`

Generate typedesh files for all scripts in a folder using mypy/stubgen

Returns: False if one or more files had an issue generating a stub

Parameters

modules_folder (*pathlib.Path*) –

Return type

bool

`stubber.utils.generate_pyi_from_file(file: pathlib.Path) → bool`

Generate a .pyi stubfile from a single .py module using mypy/stubgen

Parameters

file (*pathlib.Path*) –

Return type

bool

`stubber.utils.clean_version(version: str, *, build: bool = False, patch: bool = False, commit: bool = False, drop_v: bool = False, flat: bool = False)`

Clean up and transform the many flavours of versions

Parameters

- **version** (*str*) –
- **build** (*bool*) –
- **patch** (*bool*) –
- **commit** (*bool*) –
- **drop_v** (*bool*) –
- **flat** (*bool*) –

33.5.2 Submodules

stubber.basicgit

simple Git module, where needed via powershell

Module Contents

Functions

<code>_run_git(cmd[, repo, expect_stderr, capture_output, ...])</code>	run a external (git) command in the repo's folder and deal with some of the errors
<code>clone(→ bool)</code>	git clone [--depth 1] [--branch <tag_name>] <remote> <directory>
<code>get_tag(→ Union[str, None])</code>	get the most recent git version tag of a local repo
<code>get_tags(→ List[str])</code>	get list of tag of a local repo
<code>checkout_tag(→ bool)</code>	checkout a specific git tag
<code>sync_submodules(→ bool)</code>	make sure any submodules are in syncj
<code>checkout_commit(→ bool)</code>	Checkout a specific commit
<code>switch_tag(→ bool)</code>	switch to the specified version tag of a local repo
<code>switch_branch(→ bool)</code>	switch to the specified branch in a local repo"
<code>fetch(→ bool)</code>	fetches a repo
<code>pull(→ bool)</code>	pull a repo origin into main

`stubber.basicgit._run_git(cmd: List[str], repo: Optional[Union[pathlib.Path, str]] = None, expect_stderr=False, capture_output=True, echo_output=True)`

run a external (git) command in the repo's folder and deal with some of the errors

Parameters

- `cmd (List[str])` –
- `repo (Optional[Union[pathlib.Path, str]])` –

`stubber.basicgit.clone(remote_repo: str, path: pathlib.Path, shallow=False, tag: Optional[str] = None) → bool`

git clone [-depth 1] [-branch <tag_name>] <remote> <directory>

Parameters

- `remote_repo (str)` –
- `path (pathlib.Path)` –
- `tag (Optional[str])` –

Return type

`bool`

`stubber.basicgit.get_tag(repo: Optional[Union[str, pathlib.Path]] = None, abbreviate: bool = True) → Union[str, None]`

get the most recent git version tag of a local repo repo Path should be in the form of : repo = “./repo/micropython”
returns the tag or None

Parameters

- **repo** (*Optional[Union[str, pathlib.Path]]*) –
- **abbreviate** (*bool*) –

Return type

Union[str, None]

stubber.basicgit.get_tags(*repo: Optional[pathlib.Path] = None, minver: Optional[str] = None*) → List[str]

get list of tag of a local repo

Parameters

- **repo** (*Optional[pathlib.Path]*) –
- **minver** (*Optional[str]*) –

Return type

List[str]

stubber.basicgit.checkout_tag(*tag: str, repo: Optional[Union[str, pathlib.Path]] = None*) → bool

checkout a specific git tag

Parameters

- **tag** (*str*) –
- **repo** (*Optional[Union[str, pathlib.Path]]*) –

Return type

bool

stubber.basicgit.synch_submodules(*repo: Optional[Union[pathlib.Path, str]] = None*) → bool

make sure any submodules are in sync

Parameters**repo** (*Optional[Union[pathlib.Path, str]]*) –**Return type**

bool

stubber.basicgit.checkout_commit(*commit_hash: str, repo: Optional[Union[pathlib.Path, str]] = None*) → bool

Checkout a specific commit

Parameters

- **commit_hash** (*str*) –
- **repo** (*Optional[Union[pathlib.Path, str]]*) –

Return type

bool

stubber.basicgit.switch_tag(*tag: str, repo: Optional[Union[pathlib.Path, str]] = None*) → bool

switch to the specified version tag of a local repo repo should be in the form of : path/.git repo = ‘..//micropython/.git’ returns None

Parameters

- **tag** (*str*) –
- **repo** (*Optional[Union[pathlib.Path, str]]*) –

Return type

bool

`stubber.basicgit.switch_branch(branch: str, repo: Optional[Union[pathlib.Path, str]] = None) → bool`
switch to the specified branch in a local repo” repo should be in the form of : path/.git repo = ‘./micropython/.git’
returns None

Parameters

- `branch (str)` –
- `repo (Optional [Union[pathlib.Path, str]])` –

Return type

`bool`

`stubber.basicgit.fetch(repo: Union[pathlib.Path, str]) → bool`
fetches a repo repo should be in the form of : path/.git repo = ‘./micropython/.git’ returns True on success

Parameters

- `repo (Union[pathlib.Path, str])` –

Return type

`bool`

`stubber.basicgit.pull(repo: Union[pathlib.Path, str], branch='main') → bool`
pull a repo origin into main repo should be in the form of : path/.git repo = ‘./micropython/.git’ returns True on
success

Parameters

- `repo (Union[pathlib.Path, str])` –

Return type

`bool`

`stubber.cst_transformer`

Module Contents

Classes

<code>TypeInfo</code>	contains the functiondefs and classdefs info read from the stubs source
<code>StubTypingCollector</code>	The low-level base visitor class for traversing a CST. This should be used in

Functions

<code>update_def_docstr(→ Any)</code>	Update the docstring of a function/method or class
<code>update_module_docstr(→ Any)</code>	Update the docstring of a module

Attributes

`MODULE_KEY`

`_m`

`class stubber.cst_transformer.TypeInfo`

contains the functiondefs and classdefs info read from the stubs source

`name :str`

`decorators :Sequence[libcst.Decorator]`

`params :Optional[libcst.Parameters]`

`returns :Optional[libcst.Annotation]`

`docstr_node :Optional[libcst.SimpleStatementLine]`

`def_node :Optional[Union[libcst.FunctionDef, libcst.ClassDef]]`

`def_type :str = ?`

`exception stubber.cst_transformer.TransformError`

Bases: `Exception`

Error raised upon encountering a known error while attempting to transform the tree.

`stubber.cst_transformer.MODULE_KEY`

`stubber.cst_transformer._m`

`class stubber.cst_transformer.StubTypingCollector`

Bases: `libcst.CSTVisitor`

The low-level base visitor class for traversing a CST. This should be used in conjunction with the `visit()` method on a `CSTNode` to visit each element in a tree starting with that node. Unlike `CSTTransformer`, instances of this class cannot modify the tree.

When visiting nodes using a `CSTVisitor`, the return value of `visit()` will equal the passed in tree.

`visit_Module(node: libcst.Module) → bool`

Store the module docstring

Parameters

`node (libcst.Module) –`

Return type

`bool`

`visit_ClassDef(node: libcst.ClassDef) → Optional[bool]`

Store the class docstring

Parameters

`node (libcst.ClassDef) –`

Return type

`Optional[bool]`

leave_ClassDef(*original_node*: *libcst.ClassDef*) → None

Parameters

original_node (*libcst.ClassDef*) –

Return type

None

visit_FunctionDef(node: *libcst.FunctionDef*) → Optional[bool]

store each function/method signature

Parameters

node (*libcst.FunctionDef*) –

Return type

Optional[bool]

leave_FunctionDef(*original_node*: *libcst.FunctionDef*) → *None*

Parameters

original_node(*libcst.FunctionDef*) =

Return type

None

Update the docstring of a function/method or class

for functiondefs ending in an ellipsis, the entire body needs to be replaced. in this case the `src` body is mandatory.

Parameters

- **dest_node** (*Union[libcst.FunctionDef, libcst.ClassDef]*) –
 - **src_comment** (*Optional[libcst.SimpleStatementLine]*) –

Return type

Any

```
stubber.cst_transformer.update_module_docstr(node: libcst.Module, doc_tree:  
    Optional[libcst.SimpleStatementLine]) → Any
```

Update the docstring of a module

Parameters

- **node** (*libcst.Module*) –
 - **doc_tree** (*Optional[libcst.SimpleStatementLine]*) –

Return type

Any

stubber.downloader

Download files from a public github repo

Module Contents

Functions

<code>download_file(url, module[, folder])</code>	download a file from a public github repo
<code>download_files(repo, frozen_modules, savepath)</code>	download multiple files from a public github repo

`stubber.downloader.download_file(url: str, module: str, folder: str = '/')`

download a file from a public github repo

Parameters

- **url** (*str*) –
- **module** (*str*) –
- **folder** (*str*) –

`stubber.downloader.download_files(repo, frozen_modules, savepath)`

download multiple files from a public github repo

stubber.get_cpython

Download or update the micropython compatibility modules from pycopy and stores them in the all_stubs folder. The all_stubs folder should be mapped/symlinked to the micropython_stubs/stubs repo/folder

Module Contents

Functions

<code>get_core(requirements[, stub_path, family])</code>	Download MicroPython compatibility modules
--	--

`stubber.get_cpython.get_core(requirements, stub_path=None, family: str = 'core')`

Download MicroPython compatibility modules

Parameters

- **family** (*str*) –

stubber.get_lobo

Collect modules and python stubs from the Loboris MicroPython source project and stores them in the all_stubs folder
The all_stubs folder should be mapped/symlinked to the micropython_stubs/stubs repo/folder

Module Contents

Functions

<code>get_frozen([stub_path, repo, version])</code>	Download Loboris frozen modules direct from github repo
---	---

Attributes

FAMILY

PORT

```
stubber.get_lobo.FAMILY = loboris
stubber.get_lobo.PORT = esp32_lobo
stubber.get_lobo.get_frozen(stub_path: Optional[pathlib.Path] = None, *, repo: Optional[str] = None,
                           version='3.2.24')
```

Download Loboris frozen modules direct from github repo

Parameters

- **stub_path** (*Optional[pathlib.Path]*) –
- **repo** (*Optional[str]*) –

stubber.minify

Processing for createstubs.py minimizes and cross-compiles a micropython file.

Module Contents

Functions

<code>edit_lines(content, edits[, diff])</code>	Edit string by list of edits
<code>minify_script(→ str)</code>	minifies createstubs.py
<code>minify(source, target[, keep_report, diff, cross_compile])</code>	

Attributes

`python_minifier`

`stubber.minify.python_minifier`

`stubber.minify.edit_lines(content, edits, diff=False)`

Edit string by list of edits

Parameters

- **content** (`str`) – content to edit
- **edits** (`[(str, str)]`) – List of edits to make. The first string in the tuple represents the type of edit to make, can be either:
 - comment - comment text out (removed on minify)
 - rprint - replace text with print
 - rpass - replace text with pass
 The second string is the matching text to replace
- **diff** (`bool`, *optional*) – Prints diff of each edit. Defaults to False.

Returns

edited string

Return type

`str`

`stubber.minify.minify_script(source_script: pathlib.Path, keep_report=True, diff=False) → str`

minifies `createtests.py`

Parameters

- **keep_report** (`bool`, *optional*) – Keeps single report line in `createtests.py`. Defaults to True.
- **diff** (`bool`, *optional*) – Print diff from edits. Defaults to False.
- **source_script** (`pathlib.Path`) –

Returns

minified source text

Return type

`str`

`stubber.minify.minify(source: Union[str, pathlib.Path], target: Union[str, pathlib.Path], keep_report: bool = True, diff: bool = False, cross_compile: bool = False)`

Parameters

- **source** (`Union[str, pathlib.Path]`) –
- **target** (`Union[str, pathlib.Path]`) –
- **keep_report** (`bool`) –
- **diff** (`bool`) –
- **cross_compile** (`bool`) –

`stubber.stubber`

Create, Process, and Maintain stubs for MicroPython

`stubber.stubs_from_docs`

Read the Micropython library documentation files and use them to build stubs that can be used for static typechecking using a custom-built parser to read and process the micropython RST files - generates:

- **modules**
 - docstrings
- **function definitions**
 - function parameters based on documentation
 - docstrings
- **classes**
 - docstrings
 - `__init__` method
 - parameters based on documentation for class
 - **methods**
 - * parameters based on documentation for the method
 - * docstrings
- exceptions
- **Tries to determine the return type by parsing the docstring.**
 - Imperative verbs used in docstrings have a strong correlation to return -> None
 - recognizes documented Generators, Iterators, Callable
 - Coroutines are identified based tag “This is a Coroutine”. Then if the return type was Foo, it will be transformed to : Coroutine[*Foo*]
 - a static Lookup list is used for a few methods/functions for which the return type cannot be determined from the docstring.
 - add NoReturn to a few functions that never return (stop / deepsleep / reset)
 - if no type can be detected the type *Any* is used

The generated stub files are formatted using *black* and checked for validity using *pyright* Note: black on python 3.7 does not like some function defs *def sizeof(struct, layout_type=NATIVE, /) -> int:*

- ordering of inter-dependent classes in the same module
- **Literals / constants**
 - documentation contains repeated vars with the same indentation
 - Module level:

```
... data:: IPPROTO_UDP  
      IPPROTO_TCP
```

- class level:

```
... data:: Pin.IRQ_FALLING
    Pin.IRQ_RISING
    Pin.IRQ_LOW_LEVEL
    Pin.IRQ_HIGH_LEVEL
```

Selects the IRQ trigger `type`.

- literals documented using a wildcard are added as comments only
- Add GLUE imports to allow specific modules to import specific others.
- **Repeats of definitions in the rst file for similar functions or literals**
 - CONSTANTS (module and Class level)
 - functions
 - methods
- **Child/ Parent classes**
are added based on a (manual) lookup table CHILD_PARENT_CLASS

Module Contents

Classes

RSTReader

Functions

<code>is_balanced</code> (→ bool)	Check if a string has balanced parentheses
<code>generate_from_rst</code> (→ int)	

Attributes

NEW_OUTPUT

SEPERATOR

```
stubber.stubs_from_docs.NEW_OUTPUT = True
stubber.stubs_from_docs.SEPERATOR = ::

stubber.stubs_from_docs.is_balanced(s: str) → bool
    Check if a string has balanced parentheses
```

Parameters

`s (str)` –

```
Return type
bool

class stubber.stubs_from_docs.RSTReader(v_tag='v1.xx')

verbose = False

gather_docs = False

target = .py

property line → str
    get the current line from input, also stores this as last_line to allow for inspection and dumping the json file

Return type
str

extend_and_balance_line() → str
    Append the current line + next line in order to try to balance the parentheses in order to do this the rst_test
array is changed by the function and max_line is adjusted

Return type
str

property module_names → List[str]
    list of possible module names [uname , name] (longest first)

Return type
List[str]

strip_prefixes(name: str, strip_mod: bool = True, strip_class: bool = False)
    Remove the modulename. and or the classname. from the begining of a name

Parameters
    • name (str) –
    • strip_mod (bool) –
    • strip_class (bool) –

leave_class()

read_file(filename: pathlib.Path)

Parameters
    filename (pathlib.Path) –

prepare_output()
    clean up some trailing spaces and commas

write_file(filename: pathlib.Path) → bool

Parameters
    filename (pathlib.Path) –

Return type
bool
```

at_anchor() → bool

Stop at anchor (however .. note: should be added)

Return type

bool

at_heading() → bool

stop at heading

Return type

bool

parse_docstring() → List[str]

Read a textblock that will be used as a docstring, or used to process a toc tree The textblock is terminated at the following RST line structures/tags

– Heading == Heading ~~ Heading

The blank lines at the start and end are removed to limit the space the docstring takes up.

Return type

List[str]

fix_parameters(params: str, name: str = '') → str

Patch / correct the documentation parameter notation to a supported format that works for linting. - name is the name of the function or method or Class

Parameters

- **params** (str) –
- **name** (str) –

Return type

str

create_update_class(name: str, params: str, docstr: List[str])

Parameters

- **name** (str) –
- **params** (str) –
- **docstr** (List[str]) –

parse_toc()

process table of content with additional rst files, and add / include them in the current module

parse_module()

parse a module tag and set the module's docstring

parse_current_module()

parse_function()

parse_class()

get_RST_hint()

parse the '.. <rst hint>:: ' from the current line

parse_method()

`parse_exception()`

`parse_name(line: Optional[str] = None)`

get the constant/function/class name from a line with an identifier

Parameters

`line (Optional[str]) –`

`parse_names(oneliner: bool = True)`

get a list of constant/function/class names from and following a line with an identifier advances the linecounter

`oneliner : treat a line with commas as multiple names (used for constants)`

Parameters

`oneliner (bool) –`

`parse_data()`

proces ..data:: lines (one or more)

`parse()`

`stubber.stubs_from_docs.generate_from_rst(rst_path: pathlib.Path, dst_path: pathlib.Path, v_tag: str, release: Optional[str] = None, pattern: str = '*.rst', verbose: bool = False, suffix='.py') → int`

Parameters

- `rst_path (pathlib.Path) –`
- `dst_path (pathlib.Path) –`
- `v_tag (str) –`
- `release (Optional[str]) –`
- `pattern (str) –`
- `verbose (bool) –`

Return type

`int`

`stubber.update_fallback`

Module Contents

Functions

`fallback_sources(→ List[Tuple[str, str]])`

list of sources to build/update the fallback 'catch-all' stubfolder

`update_fallback(stubpath, fallback_path[, version])`

update the fallback stubs from the defined sources

Attributes

`RELEASED`

`stubber.updateFallback.RELEASED = v1_18`

`stubber.updateFallback.fallback_sources(version: str, fw_version: Optional[str] = None) → List[Tuple[str, str]]`

list of sources to build/update the fallback ‘catch-all’ stubfolder version : the version to use fw_version : version to source the Firmware stubs from. defaults to the version used , but can be lower

Parameters

- `version (str)` –
- `fw_version (Optional[str])` –

Return type

`List[Tuple[str, str]]`

`stubber.updateFallback.updateFallback(stubpath: pathlib.Path, fallback_path: pathlib.Path, version: str = RELEASED)`

update the fallback stubs from the defined sources

Parameters

- `stubpath (pathlib.Path)` –
- `fallback_path (pathlib.Path)` –
- `version (str)` –

`stubber.updateModuleList`

generate the list of modules that should be attempted to stub for this : - combine the modules from the different texts files - split the lines into individual module names - combine them in one set - remove the ones than cannot be stubbed - remove test modules, ending in `_test` - write updates to:

- board/modulelist.txt
- board/createsubs.py
- TODO: remove the frozen modules from this list
- TODO: bump patch number if there are actual changes

Module Contents

Functions

<code>read_modules(→ Set[str])</code>	read text files with modules per firmware.
<code>main()</code>	helper script

`stubber.update_module_list.read_modules(path: Optional[pathlib.Path] = None) → Set[str]`

read text files with modules per firmware. each contains the output of help("modules") - lines starting with # are comments. - split the other lines at whitespace separator, - and add each module to a set

Parameters

`path (Optional[pathlib.Path]) –`

Return type

`Set[str]`

`stubber.update_module_list.main()`

helper script generate a few lines of code with all modules to be stubbed by createstubs

33.5.3 Package Contents

`stubber.__version__`

CHAPTER
THIRTYFOUR

INDICES AND TABLES

- genindex
- modindex
- search

PYTHON MODULE INDEX

C

createtubs, 91
createtubs_db, 94
createtubs_mem, 97

S

stub_lvgl, 100
stubber, 100
stubber.basicgit, 156
stubber.codemod, 100
stubber.codemod.add_comment, 100
stubber.codemod.enrich, 101
stubber.codemod.merge_docstub, 102
stubber.commands, 104
stubber.commands.build_cmd, 104
stubber.commands.cli, 104
stubber.commands.clone_cmd, 105
stubber.commands.config_cmd, 105
stubber.commands.enrich_folder_cmd, 105
stubber.commands.get_core_cmd, 106
stubber.commands.get_docstubs_cmd, 106
stubber.commands.get_frozen_cmd, 107
stubber.commands.get_lobo_cmd, 107
stubber.commands.merge_cmd, 108
stubber.commands.minify_cmd, 108
stubber.commands.publish_cmd, 109
stubber.commands.stub_cmd, 109
stubber.commands.switch_cmd, 110
stubber.commands.updFallback_cmd, 110
stubber.commands.updModuleList_cmd, 111
stubber.cst_transformer, 158
stubber.downloader, 161
stubber.freeze, 111
stubber.freeze.common, 111
stubber.freeze.freeze_folder, 112
stubber.freeze.freeze_manifest_2, 113
stubber.freeze.get_frozen, 114
stubber.get_cpython, 161
stubber.get_lobo, 162
stubber.minify, 162
stubber.publish, 115
stubber.publish.bump, 115

stubber.publish.candidates, 115
stubber.publish.database, 118
stubber.publish.enums, 118
stubber.publish.merge_docstubs, 120
stubber.publish.package, 121
stubber.publish.publish, 122
stubber.publish.pypi, 123
stubber.publish.stubpacker, 124
stubber.rst, 127
stubber.rst.classsort, 127
stubber.rst.lookup, 127
stubber.rst.output_dict, 128
stubber.rst.report_return, 132
stubber.rst.rst_utils, 132
stubber.stubber, 164
stubber.stubs_from_docs, 164
stubber.tools, 141
stubber.tools.manifestfile, 141
stubber.tools.pyboard, 143
stubber.updateFallback, 168
stubber.updateModuleList, 169
stubber.utils, 146
stubber.utils.config, 146
stubber.utils.makeversionhdr, 148
stubber.utils.manifest, 148
stubber.utils.my_version, 150
stubber.utils.post, 150
stubber.utils.repos, 151
stubber.utils.stubmaker, 151
stubber.utils.typed_config_toml, 152
stubber.utils.versions, 153

INDEX

Symbols

_MAX_CLASS_LEVEL (*in module* `createtubs`), 92
_MAX_CLASS_LEVEL (*in module* `createtubs_db`), 95
_MAX_CLASS_LEVEL (*in module* `createtubs_mem`), 98
`__add__()` (*stubber.rst.SourceDict method*), 137
`__add__()` (*stubber.rst.output_dict.SourceDict method*), 129
`__all__` (*in module* `stubber.rst`), 140
`__del__()` (*stubber.tools.pyboard.TelnetToSerial method*), 144
`__str__()` (*stubber.rst.ModuleSourceDict method*), 138
`__str__()` (*stubber.rst.SourceDict method*), 137
`__str__()` (*stubber.rst.output_dict.ModuleSourceDict method*), 130
`__str__()` (*stubber.rst.output_dict.SourceDict method*), 129
`__version__` (*in module* `createtubs`), 92
`__version__` (*in module* `createtubs_db`), 95
`__version__` (*in module* `createtubs_mem`), 98
`__version__` (*in module* `stubber`), 170
`__version__` (*in module* `stubber.utils.my_version`), 150
`_add_file()` (*stubber.tools.manifestfile.ManifestFile method*), 141
`_freeze_internal()` (*stubber.tools.manifestfile.ManifestFile method*), 142
`_info()` (*in module* `createtubs`), 93
`_info()` (*in module* `createtubs_db`), 96
`_info()` (*in module* `createtubs_mem`), 99
`_injected_import_hook_code` (*in module* `stubber.tools.pyboard`), 146
`_log` (*in module* `createtubs`), 94
`_log` (*in module* `createtubs_db`), 97
`_log` (*in module* `createtubs_mem`), 99
`_m` (*in module* `stubber.cst_transformer`), 159
`_manifest_globals()` (*stubber.tools.manifestfile.ManifestFile method*), 141
`_resolve_path()` (*stubber.tools.manifestfile.ManifestFile method*), 141
`_run_git()` (*in module* `stubber.basicgit`), 156
`_search()` (*stubber.tools.manifestfile.ManifestFile method*), 141
`_type_from_context()` (*in module* `stubber.rst`), 140
`_type_from_context()` (*in module* `stubber.rst.rst_utils`), 134
`-V`
 `stubber-build` command line option, 7
 `stubber-merge` command line option, 11
 `stubber-publish` command line option, 12
`--Version`
 `stubber-build` command line option, 7
 `stubber-merge` command line option, 11
 `stubber-publish` command line option, 12
`--add-stubs`
 `stubber-clone` command line option, 8
`--all`
 `stubber-minify` command line option, 12
`--black`
 `stubber-get-core` command line option, 9
 `stubber-get-docstubs` command line option, 9
 `stubber-get-frozen` command line option, 10
 `stubber-get-lobo` command line option, 11
`--board`
 `stubber-build` command line option, 7
 `stubber-publish` command line option, 12
`--clean`
 `stubber-build` command line option, 7
 `stubber-publish` command line option, 13
`--compile`
 `stubber-minify` command line option, 12
`--diff`
 `stubber-enrich` command line option, 8
 `stubber-minify` command line option, 11
`--docstubs`
 `stubber-enrich` command line option, 8
`--dry-run`
 `stubber-enrich` command line option, 8
 `stubber-publish` command line option, 12
`--family`
 `stubber-build` command line option, 7

```
stubber-get-docstubs command line
    option, 9
stubber-merge command line option, 11
stubber-publish command line option, 12
--force
    stubber-publish command line option, 12
--no-black
    stubber-get-core command line option, 9
    stubber-get-docstubs command line
        option, 9
    stubber-get-frozen command line option,
        10
    stubber-get-lobo command line option, 11
--no-pypi
    stubber-get-core command line option, 9
    stubber-get-frozen command line option,
        10
    stubber-get-lobo command line option, 10
--no-report
    stubber-minify command line option, 12
--no-stubs
    stubber-clone command line option, 8
--path
    stubber-clone command line option, 8
    stubber-get-docstubs command line
        option, 9
    stubber-switch command line option, 13
--port
    stubber-build command line option, 7
    stubber-publish command line option, 12
--pyi
    stubber-get-core command line option, 9
    stubber-get-frozen command line option,
        10
    stubber-get-lobo command line option, 10
--pypi
    stubber-publish command line option, 12
--report
    stubber-minify command line option, 12
--source
    stubber-minify command line option, 11
    stubber-stub command line option, 13
--stub-folder
    stubber-get-core command line option, 9
    stubber-get-docstubs command line
        option, 9
    stubber-get-frozen command line option,
        10
    stubber-get-lobo command line option, 10
    stubber-update-fallback command line
        option, 14
--stub-path
    stubber-get-docstubs command line
        option, 9
--stubs
    stubber-enrich command line option, 8
--tag
    stubber-get-frozen command line option,
        10
--target
    stubber-minify command line option, 11
--test-pypi
    stubber-publish command line option, 12
--verbose
    stubber command line option, 7
--version
    stubber command line option, 7
    stubber-build command line option, 7
    stubber-get-frozen command line option,
        10
    stubber-merge command line option, 11
    stubber-publish command line option, 12
    stubber-update-fallback command line
        option, 14
-a
    stubber-minify command line option, 12
-b
    stubber-build command line option, 7
    stubber-get-docstubs command line
        option, 9
    stubber-publish command line option, 12
-c
    stubber-minify command line option, 12
-d
    stubber-minify command line option, 11
-ds
    stubber-enrich command line option, 8
-f
    stubber-get-docstubs command line
        option, 9
-nb
    stubber-get-docstubs command line
        option, 9
-p
    stubber-build command line option, 7
    stubber-clone command line option, 8
    stubber-get-docstubs command line
        option, 9
    stubber-publish command line option, 12
    stubber-switch command line option, 13
-s
    stubber-enrich command line option, 8
    stubber-minify command line option, 11
    stubber-stub command line option, 13
-stubs
    stubber-get-core command line option, 9
    stubber-get-frozen command line option,
        10
```

-t	stubber-get-lobo command line option, 10	bump_postrelease() (in module stubber.publish.bump), 115
-v	stubber-minify command line option, 11	
-xc	stubber command line option, 7	
	stubber-minify command line option, 12	
A		
add_args()	(stubber.codemod.add_comment.AddComment static method), 101	CHILD_PARENT_CLASS (in module stubber.rst.lookup), 128
add_args()	(stubber.codemod.merge_docstub.MergeCommand static method), 102	classes() (stubber.rst.ModuleSourceDict method), 138
add_comment()	(stubber.rst.output_dict.SourceDict method), 129	classes() (stubber.rst.output_dict.ModuleSourceDict method), 131
add_comment()	(stubber.rst.SourceDict method), 137	ClassSourceDict (class in stubber.rst), 138
add_constant()	(stubber.rst.output_dict.SourceDict method), 130	ClassSourceDict (class in stubber.rst.output_dict), 131
add_constant()	(stubber.rst.SourceDict method), 137	clean() (createtubs.Stubber method), 93
add_constant_smart()	(stubber.rst.output_dict.SourceDict method), 130	clean() (createtubs_db.Stubber method), 96
add_constant_smart()	(stubber.rst.SourceDict method), 137	clean() (createtubs_mem.Stubber method), 98
add_docstr()	(stubber.rst.output_dict.SourceDict method), 129	clean() (stubber.publish.stubpacker.StubPackage method), 126
add_docstr()	(stubber.rst.SourceDict method), 137	clean_version() (in module stubber.utils), 155
add_import()	(stubber.rst.ModuleSourceDict method), 138	clean_version() (in module stubber.utils.versions), 153
add_import()	(stubber.rst.output_dict.ModuleSourceDict method), 131	cli_build() (in module stubber.commands.build_cmd), 104
add_line()	(stubber.rst.output_dict.SourceDict method), 130	cli_clone() (in module stubber.commands.clone_cmd), 105
add_line()	(stubber.rst.SourceDict method), 137	cli_config() (in module stubber.commands.config_cmd), 105
add_modules()	(createtubs.Stubber method), 92	cli_docstubs() (in module stubber.commands.get_docstubs_cmd), 106
add_modules()	(createtubs_db.Stubber method), 95	cli_enrich_folder() (in module stubber.commands.enrich_folder_cmd), 105
add_modules()	(createtubs_mem.Stubber method), 98	cli_get_core() (in module stubber.commands.get_core_cmd), 106
AddComment	(class in stubber.codemod.add_comment), 100	cli_get_frozen() (in module stubber.commands.get_frozen_cmd), 107
ALL_TYPES	(in module stubber.publish.enums), 119	cli_get_lobo() (in module stubber.commands.get_lobo_cmd), 107
ALL_VERSIONS	(stubber.utils.config.StubberConfig attribute), 147	cli_merge_docstubs() (in module stubber.commands.merge_cmd), 108
apply_frozen_module_fixes()	(in module stubber.freeze.common), 112	cli_minify() (in module stubber.commands.minify_cmd), 108
at_anchor()	(stubber.stubs_from_docs.RSTReader method), 166	cli_publish() (in module stubber.commands.publish_cmd), 109
at_heading()	(stubber.stubs_from_docs.RSTReader method), 167	cli_stub() (in module stubber.commands.stub_cmd), 109
B		
build()	(stubber.publish.stubpacker.StubPackage method), 127	cli_switch() (in module stubber.commands.switch_cmd), 110
bump()	(stubber.publish.stubpacker.StubPackage method), 126	cli_update_fallback() (in module stubber.commands.upd_fallback_cmd), 110
		cli_update_module_list() (in module stubber.commands.upd_module_list_cmd), 111

clone() (*in module stubber.basicgit*), 156
close() (*stubber.tools.pyboard.ProcessPtyToTerminal method*), 145
close() (*stubber.tools.pyboard.ProcessToSerial method*), 145
close() (*stubber.tools.pyboard.Pyboard method*), 145
close() (*stubber.tools.pyboard.TelnetToSerial method*), 144
COMBO_STUBS (*in module stubber.publish.enums*), 119
compound_candidates() (*in module stubber.rst*), 139
compound_candidates() (*in module stubber.rst.rst_utils*), 133
CONFIG (*in module stubber.utils.config*), 148
copy_docstubs() (*in module stubber.publish.merge_docstubs*), 120
copy_frozen_to_stubs() (*in module stubber.freeze.freeze_manifest_2*), 113
copy_stubs() (*stubber.publish.stubpacker.StubPackage method*), 125
CORE (*stubber.publish.enums.StubSource attribute*), 119
CORE_STUBS (*in module stubber.publish.enums*), 119
create_all_stubs() (*createstubs.Stubber method*), 92
create_all_stubs() (*createstubs_db.Stubber method*), 95
create_all_stubs() (*createstubs_mem.Stubber method*), 98
create_hash() (*stubber.publish.stubpacker.StubPackage method*), 126
create_license() (*stubber.publish.stubpacker.StubPackage method*), 125
create_module_stub() (*createstubs.Stubber method*), 92
create_module_stub() (*createstubs_db.Stubber method*), 95
create_module_stub() (*createstubs_mem.Stubber method*), 98
create_one_stub() (*createstubs.Stubber method*), 92
create_one_stub() (*createstubs_db.Stubber method*), 95
create_one_stub() (*createstubs_mem.Stubber method*), 98
create_package() (*in module stubber.publish.package*), 121
create_readme() (*stubber.publish.stubpacker.StubPackage method*), 125
create_update_class() (*stubber.stubs_from_docs.RSTReader* 167
create_update_pyproject_toml() (*stubber.publish.stubpacker.StubPackage* 126
createstubs
module, 91
createtestubs_db
module, 94
createtestubs_mem
module, 97

D

decorators (*stubber.cst_transformer.TypeInfo attribute*), 159
def_node (*stubber.cst_transformer.TypeInfo attribute*), 159
def_type (*stubber.cst_transformer.TypeInfo attribute*), 159
DESCRIPTION (*stubber.codemod.add_comment.AddComment attribute*), 100
DESCRIPTION (*stubber.codemod.merge_docstub.MergeCommand attribute*), 102
distill_return() (*in module stubber.rst*), 139
distill_return() (*in module stubber.rst.rst_utils*), 134
do_post_processing() (*in module stubber.utils*), 155
do_post_processing() (*in module stubber.utils.post*), 150
DOC (*stubber.publish.enums.StubSource attribute*), 119
DOC_STUBS (*in module stubber.publish.enums*), 119
docstr_node (*stubber.cst_transformer.TypeInfo attribute*), 159
docstub_candidates() (*in module stubber.publish.candidates*), 117
DOCSTUB_SKIP (*in module stubber.rst*), 136
DOCSTUB_SKIP (*in module stubber.rst.lookup*), 128
download_file() (*in module stubber.downloader*), 161
download_files() (*in module stubber.downloader*), 161

E

edit_lines() (*in module stubber.minify*), 163
ENOENT (*in module createstubs*), 92
ENOENT (*in module createstubs_db*), 95
ENOENT (*in module createstubs_mem*), 98
enrich_file() (*in module stubber.codemod.enrich*), 101
enrich_folder() (*in module stubber.codemod.enrich*), 102
ensure_folder() (*in module createstubs*), 93
ensure_folder() (*in module createstubs_db*), 96
ensure_folder() (*in module createstubs_mem*), 99
enter_raw_repl() (*stubber.tools.pyboard.Pyboard method*), 145
eval() (*stubber.tools.pyboard.Pyboard method*), 145
exec_() (*stubber.tools.pyboard.Pyboard method*), 145
exec_raw() (*stubber.tools.pyboard.Pyboard method*), 145
exec_raw_no_follow() (*stubber.tools.pyboard.Pyboard method*), 145

F

- execfile() (*in module stubber.tools.pyboard*), 146
- execfile() (*stubber.tools.pyboard.Pyboard method*), 145
- execute() (*stubber.tools.manifestfile.ManifestFile method*), 141
- exit_raw_repl() (*stubber.tools.pyboard.Pyboard method*), 145
- extend_and_balance_line() (*stubber.stubs_from_docs.RSTReader method*), 166
- fallback_path (*stubber.utils.config.StubberConfig attribute*), 147
- fallback_sources() (*in module stubber.update_fallback*), 169
- FAMILY (*in module stubber.freeze.freeze_folder*), 112
- FAMILY (*in module stubber.freeze.get_frozen*), 114
- FAMILY (*in module stubber.get_lobo*), 162
- fetch() (*in module stubber.basicgit*), 158
- file_exists() (*in module createstubs*), 93
- file_exists() (*in module createstubs_db*), 96
- file_exists() (*in module createstubs_mem*), 99
- files() (*stubber.tools.manifestfile.ManifestFile method*), 141
- filesystem_command() (*in module stubber.tools.pyboard*), 146
- find() (*stubber.rst.ModuleSourceDict method*), 138
- find() (*stubber.rst.output_dict.ModuleSourceDict method*), 130
- find() (*stubber.rst.output_dict.SourceDict method*), 130
- find() (*stubber.rst.SourceDict method*), 137
- FIRMWARE (*stubber.publish.enums.StubSource attribute*), 119
- firmware_candidates() (*in module stubber.publish.candidates*), 117
- FIRMWARE_STUBS (*in module stubber.publish.enums*), 119
- fix_parameters() (*stubber.stubs_from_docs.RSTReader method*), 167
- flat_fwid (*createtubs.Stubber property*), 93
- flat_fwid (*createtubs_db.Stubber property*), 96
- flat_fwid (*createtubs_mem.Stubber property*), 98
- follow() (*stubber.tools.pyboard.Pyboard method*), 145
- freeze() (*stubber.tools.manifestfile.ManifestFile method*), 142
- freeze_any() (*in module stubber.freeze.get_frozen*), 114
- freeze_as_mpy() (*stubber.tools.manifestfile.ManifestFile method*), 143
- freeze_as_str() (*stubber.tools.manifestfile.ManifestFile method*), 143
- freeze_folders() (*in module stubber.freeze.freeze_folder*), 112
- freeze_mpy() (*stubber.tools.manifestfile.ManifestFile method*), 143
- freeze_one_manifest_2() (*in module stubber.freeze.freeze_manifest_2*), 113
- from_dict() (*stubber.publish.stubpacker.StubPackage method*), 125
- FROZEN (*stubber.publish.enums.StubSource attribute*), 119
- frozen_candidates() (*in module stubber.publish.candidates*), 117
- fs_cat() (*stubber.tools.pyboard.Pyboard method*), 145
- fs_get() (*stubber.tools.pyboard.Pyboard method*), 145
- fs_ls() (*stubber.tools.pyboard.Pyboard method*), 145
- fs_mkdir() (*stubber.tools.pyboard.Pyboard method*), 145
- fs_put() (*stubber.tools.pyboard.Pyboard method*), 145
- fs_rm() (*stubber.tools.pyboard.Pyboard method*), 146
- fs_rmdir() (*stubber.tools.pyboard.Pyboard method*), 146
- FunctionSourceDict (*class in stubber.rst*), 138
- FunctionSourceDict (*class in stubber.rst.output_dict*), 131
- fw_folder_name() (*in module stubber.publish.merge_docstubs*), 120

G

- gather_docs (*stubber.stubs_from_docs.RSTReader attribute*), 166
- generate_from_rst() (*in module stubber.stubs_from_docs*), 168
- generate_pyi_files() (*in module stubber.utils*), 155
- generate_pyi_files() (*in module stubber.utils.stubmaker*), 152
- generate_pyi_from_file() (*in module stubber.utils*), 155
- generate_pyi_from_file() (*in module stubber.utils.stubmaker*), 152
- get_config_value() (*stubber.utils.typed_config_toml.TomlConfigSource method*), 153
- get_core() (*in module stubber.get_cpython*), 161
- get_database() (*in module stubber.publish.database*), 118
- get_freeze_path() (*in module stubber.freeze.common*), 111
- get_frozen() (*in module stubber.get_lobo*), 162
- get_manifests() (*in module stubber.freeze.get_frozen*), 114
- get_obj_attributes() (*createtubs.Stubber method*), 92

```

get_obj_attributes()      (createstubs_db.Stubber
                        method), 95
get_obj_attributes()      (createstubs_mem.Stubber
                        method), 98
get_package_info()        (in module stub-
                        ber.publish.package), 121
get_portboard()           (in module stubber.freeze.common),
                        111
get_pypy_versions()       (in module stub-
                        ber.publish.pypy), 123
get_root()                (in module createstubs), 93
get_root()                (in module createstubs_db), 96
get_root()                (in module createstubs_mem), 99
get_RST_hint()             (stubber.stubs_from_docs.RSTReader
                        method), 167
get_tag()                 (in module stubber.basicgit), 156
get_tags()                (in module stubber.basicgit), 157
get_time()                (stubber.tools.pyboard.Pyboard method),
                        145
get_version_build_from_git()  (in module stub-
                                ber.utils.makeversionhdr), 148
get_version_info_from_git()  (in module stub-
                                ber.utils.makeversionhdr), 148

```

|

```

include()                (stubber.tools.manifestfile.ManifestFile
                        method), 141
index()                  (stubber.rst.output_dict.SourceDict method),
                        130
index()                  (stubber.rst.SourceDict method), 138
inWaiting()               (stubber.tools.pyboard.ProcessPtyToTerminal
                        method), 145
inWaiting()               (stubber.tools.pyboard.ProcessToSerial
                        method), 145
inWaiting()               (stubber.tools.pyboard.TelnetToSerial
                        method), 144
is_balanced()              (in module stubber.stubs_from_docs),
                        165
is_changed()               (stubber.publish.stubpacker.StubPackage
                        method), 126
isMicroPython()             (in module createstubs), 93
isMicroPython()             (in module createstubs_db), 96
isMicroPython()             (in module createstubs_mem), 99

```

L

```

LAST_VERSION              (in module stub-
                        ber.publish.merge_docstubs), 120
leave_class()              (stubber.stubs_from_docs.RSTReader
                        method), 166
leave_ClassDef()            (stub-
                        ber.codemod.merge_docstub.MergeCommand
                        method), 103
leave_ClassDef()            (stub-
                        ber.cst_transformer.StubTypingCollector

```

```

                        method), 159
leave_FunctionDef()         (stub-
                        ber.codemod.merge_docstub.MergeCommand
                        method), 103
leave_FunctionDef()         (stub-
                        ber.cst_transformer.StubTypingCollector
                        method), 160
leave_Module()              (stub-
                        ber.codemod.add_comment.AddComment
                        method), 101
leave_Module()              (stub-
                        ber.codemod.merge_docstub.MergeCommand
                        method), 103
line (stubber.stubs_from_docs.RSTReader property),
       166
list_frozen_ports()          (in module stub-
                            ber.publish.candidates), 116
list_micropython_port_boards()  (in module stub-
                                ber.publish.candidates), 117
list_micropython_ports()       (in module stub-
                                ber.publish.candidates), 117
LOOKUP_LIST (in module stubber.rst), 136
LOOKUP_LIST (in module stubber.rst.lookup), 128

```

M

```

main()                    (in module createstubs), 93
main()                    (in module createstubs_mem), 99
main()                    (in module stub_lvgl), 100
main()                    (in module stubber.tools.pyboard), 146
main()                    (in module stubber.update_module_list), 170
main_esp8266()              (in module createstubs_db), 96
make_manifest()              (in module stubber.utils), 154
make_manifest()              (in module stubber.utils.manifest),
                           149
make_path_vars()              (in module stub-
                           ber.freeze.freeze_manifest_2), 113
manifest()                 (in module stubber.utils), 154
manifest()                 (in module stubber.utils.manifest), 148
ManifestFile (class in stubber.tools.manifestfile), 141
ManifestFileError, 141
match_lib_with_mpy()          (in module stubber.utils.repos),
                           151
merge_all_docstubs()          (in module stub-
                           ber.publish.merge_docstubs), 120
MergeCommand (class in stub-
                           ber.codemod.merge_docstub), 102
MERGED (stubber.publish.enums.StubSource attribute),
       119
metadata()                  (stubber.tools.manifestfile.ManifestFile
                           method), 141
micropython_versions()        (in module stub-
                           ber.utils.versions), 153
minify()                    (in module stubber.minify), 163
minify_script()              (in module stubber.minify), 163

```

module
 createstubs, 91
 createstubs_db, 94
 createstubs_mem, 97
 stub_lvgl, 100
 stubber, 100
 stubber.basicgit, 156
 stubber.codemod, 100
 stubber.codemod.add_comment, 100
 stubber.codemod.enrich, 101
 stubber.codemod.merge_docstub, 102
 stubber.commands, 104
 stubber.commands.build_cmd, 104
 stubber.commands.cli, 104
 stubber.commands.clone_cmd, 105
 stubber.commands.config_cmd, 105
 stubber.commands.enrich_folder_cmd, 105
 stubber.commands.get_core_cmd, 106
 stubber.commands.get_docstubs_cmd, 106
 stubber.commands.get_frozen_cmd, 107
 stubber.commands.get_lobo_cmd, 107
 stubber.commands.merge_cmd, 108
 stubber.commands.minify_cmd, 108
 stubber.commands.publish_cmd, 109
 stubber.commands.stub_cmd, 109
 stubber.commands.switch_cmd, 110
 stubber.commands.updFallback_cmd, 110
 stubber.commands.updModuleList_cmd, 111
 stubber.cst_transformer, 158
 stubber.downloader, 161
 stubber.freeze, 111
 stubber.freeze.common, 111
 stubber.freeze.freeze_folder, 112
 stubber.freeze.freeze_manifest_2, 113
 stubber.freeze.get_frozen, 114
 stubber.get_cpython, 161
 stubber.get_lobo, 162
 stubber.minify, 162
 stubber.publish, 115
 stubber.publish.bump, 115
 stubber.publish.candidates, 115
 stubber.publish.database, 118
 stubber.publish.enums, 118
 stubber.publish.merge_docstubs, 120
 stubber.publish.package, 121
 stubber.publish.publish, 122
 stubber.publish.pypi, 123
 stubber.publish.stubpacker, 124
 stubber.rst, 127
 stubber.rst.classsort, 127
 stubber.rst.lookup, 127
 stubber.rst.output_dict, 128
 stubber.rst.report_return, 132
 stubber.rst.rst_utils, 132
 stubber.stubber, 164
 stubber.stubs_from_docs, 164
 stubber.tools, 141
 stubber.tools.manifestfile, 141
 stubber.tools.pyboard, 143
 stubber.updateFallback, 168
 stubber.updateModuleList, 169
 stubber.utils, 146
 stubber.utils.config, 146
 stubber.utils.makeversionhdr, 148
 stubber.utils.manifest, 148
 stubber.utils.my_version, 150
 stubber.utils.post, 150
 stubber.utils.repos, 151
 stubber.utils.stubmaker, 151
 stubber.utils.typedConfigToml, 152
 stubber.utils.versions, 153
module() (*stubber.tools.manifestfile.ManifestFile method*), 142
MODULE_GLUE (*in module stubber.rst*), 136
MODULE_GLUE (*in module stubber.rst.lookup*), 128
MODULE_KEY (*in module stubber.cst_transformer*), 159
module_names (*stubber.stubs_from_docs.RSTReader property*), 166
ModuleSourceDict (*class in stubber.rst*), 138
ModuleSourceDict (*class in stubber.rst.output_dict*), 130
mpy_lib_path (*stubber.utils.config.StubberConfig attribute*), 147
mpy_path (*stubber.utils.config.StubberConfig attribute*), 147

N

name (*stubber.cst_transformer.TypeInfo attribute*), 159
NEW_OUTPUT (*in module stubber.stubs_from_docs*), 165
NONE_VERBS (*in module stubber.rst*), 136
NONE_VERBS (*in module stubber.rst.lookup*), 128

O

object_candidates() (*in module stubber.rst*), 139
object_candidates() (*in module stubber.rst.rst_utils*), 134
OLDEST_VERSION (*in module stubber.publish.candidates*), 116

P

package() (*stubber.tools.manifestfile.ManifestFile method*), 142
package_name() (*in module stubber.publish.package*), 121
package_path (*stubber.publish.stubpacker.StubPackage property*), 124
PARAM_FIXES (*in module stubber.rst*), 136
PARAM_FIXES (*in module stubber.rst.lookup*), 128

params (*stubber.cst_transformer.TypeInfo* attribute), 159
parse() (*stubber.stubs_from_docs.RSTReader* method), 168
parse_class() (*stubber.stubs_from_docs.RSTReader* method), 167
parse_current_module() (*stubber.stubs_from_docs.RSTReader* method), 167
parse_data() (*stubber.stubs_from_docs.RSTReader* method), 168
parse_docstring() (*stubber.stubs_from_docs.RSTReader* method), 167
parse_exception() (*stubber.stubs_from_docs.RSTReader* method), 167
parse_function() (*stubber.stubs_from_docs.RSTReader* method), 167
parse_method() (*stubber.stubs_from_docs.RSTReader* method), 167
parse_module() (*stubber.stubs_from_docs.RSTReader* method), 167
parse_name() (*stubber.stubs_from_docs.RSTReader* method), 168
parse_names() (*stubber.stubs_from_docs.RSTReader* method), 168
parse_toc() (*stubber.stubs_from_docs.RSTReader* method), 167
pkg_version (*stubber.publish.stubpacker.StubPackage* property), 125
PORT (*in module stubber.get_lobo*), 162
post_read_hook() (*stubber.utils.config.StubberConfig* method), 147
prepare_output() (*stubber.stubs_from_docs.RSTReader* method), 166
process() (*in module stubber.rst.report_return*), 132
ProcessPtyToTerminal (*class in stubber.tools.pyboard*), 145
ProcessToSerial (*class in stubber.tools.pyboard*), 145
publish() (*in module stubber.publish.publish*), 122
publish() (*stubber.publish.stubpacker.StubPackage* method), 127
publish_multiple() (*in module stubber.publish.publish*), 123
publish_one() (*in module stubber.publish.publish*), 122
publish_path (*stubber.utils.config.StubberConfig* attribute), 147
pull() (*in module stubber.basicgit*), 158
Pyboard (*class in stubber.tools.pyboard*), 145
PyboardError, 144
pyproject (*stubber.publish.stubpacker.StubPackage* property), 125
python_minifier (*in module stubber.minify*), 163

R

raw_paste_write() (*stubber.tools.pyboard.Pyboard* method), 145
read() (*stubber.tools.pyboard.ProcessPtyToTerminal* method), 145
read() (*stubber.tools.pyboard.ProcessToSerial* method), 145
read() (*stubber.tools.pyboard.TelnetToSerial* method), 144
read_file() (*stubber.stubs_from_docs.RSTReader* method), 166
read_micropython_lib_commits() (*in module stubber.utils.repos*), 151
read_modules() (*in module stubber.update_module_list*), 169
read_path() (*in module createstubs*), 93
read_path() (*in module createstubs_db*), 96
read_path() (*in module createstubs_mem*), 99
read_until() (*stubber.tools.pyboard.Pyboard* method), 145
readconfig() (*in module stubber.utils.config*), 148
RELEASED (*in module stubber.update_fallback*), 169
repo_path (*stubber.utils.config.StubberConfig* attribute), 147
report() (*createstubs.Stubber* method), 93
report() (*createstubs_db.Stubber* method), 96
report() (*createstubs_mem.Stubber* method), 99
require() (*stubber.tools.manifestfile.ManifestFile* method), 142
return_type_from_context() (*in module stubber.rst*), 140
return_type_from_context() (*in module stubber.rst.rst_utils*), 134
returns (*stubber.cst_transformer.TypeInfo* attribute), 159
RST_DOC_FIXES (*in module stubber.rst*), 136
RST_DOC_FIXES (*in module stubber.rst.lookup*), 128
RSTReader (*class in stubber.stubs_from_docs*), 166
run_autoflake() (*in module stubber.utils.post*), 150
run_black() (*in module stubber.utils.post*), 150
run_poetry() (*stubber.publish.stubpacker.StubPackage* method), 126

S

SEPARATOR (*in module stubber.stubs_from_docs*), 165
show_help() (*in module createstubs*), 93
show_help() (*in module createstubs_db*), 96
show_help() (*in module createstubs_mem*), 99
simple_candidates() (*in module stubber.rst*), 139
simple_candidates() (*in module stubber.rst.rst_utils*), 133
sort() (*stubber.rst.ModuleSourceDict* method), 138

sort() (*stubber.rst.output_dict.ModuleSourceDict method*), 130
sort_classes() (*in module stubber.rst*), 136
sort_classes() (*in module stubber.rst.classsort*), 127
SourceDict (*class in stubber.rst*), 136
SourceDict (*class in stubber.rst.output_dict*), 129
STABLE_VERSION (*stubber.utils.config.StubberConfig attribute*), 147
stdout (*in module stubber.tools.pyboard*), 144
stdout_write_bytes() (*in module stubber.tools.pyboard*), 144
strip_prefixes() (*stubber.stubs_from_docs.RSTReader method*), 166
stub_lvgl
 module, 100
stub_path (*stubber.utils.config.StubberConfig attribute*), 147
stubber
 module, 100
Stubber (*class in createstubs*), 92
Stubber (*class in createstubs_db*), 95
Stubber (*class in createstubs_mem*), 98
stubber command line option
 `--verbose`, 7
 `--version`, 7
 `-v`, 7
stubber.basicgit
 module, 156
stubber.codemod
 module, 100
stubber.codemod.add_comment
 module, 100
stubber.codemod.enrich
 module, 101
stubber.codemod.merge_docstub
 module, 102
stubber.commands
 module, 104
stubber.commands.build_cmd
 module, 104
stubber.commands.cli
 module, 104
stubber.commands.clone_cmd
 module, 105
stubber.commands.config_cmd
 module, 105
stubber.commands.enrich_folder_cmd
 module, 105
stubber.commands.get_core_cmd
 module, 106
stubber.commands.get_docstubs_cmd
 module, 106
stubber.commands.get_frozen_cmd
 module, 107
stubber.commands.get_lobo_cmd
 module, 107
stubber.commands.merge_cmd
 module, 108
stubber.commands.minify_cmd
 module, 108
stubber.commands.publish_cmd
 module, 109
stubber.commands.stub_cmd
 module, 109
stubber.commands.switch_cmd
 module, 110
stubber.commands.upd_fallback_cmd
 module, 110
stubber.commands.upd_module_list_cmd
 module, 111
stubber.cst_transformer
 module, 158
stubber.downloader
 module, 161
stubber.freeze
 module, 111
stubber.freeze.common
 module, 111
stubber.freeze.freeze_folder
 module, 112
stubber.freeze.freeze_manifest_2
 module, 113
stubber.freeze.get_frozen
 module, 114
stubber.get_cpython
 module, 161
stubber.get_lobo
 module, 162
stubber.minify
 module, 162
stubber.publish
 module, 115
stubber.publish.bump
 module, 115
stubber.publish.candidates
 module, 115
stubber.publish.database
 module, 118
stubber.publish.enums
 module, 118
stubber.publish.merge_docstubs
 module, 120
stubber.publish.package
 module, 121
stubber.publish.publish
 module, 122
stubber.publish.pypi

```
    module, 123
stubber.publish.stubpacker
    module, 124
stubber.rst
    module, 127
stubber.rst.classsort
    module, 127
stubber.rst.lookup
    module, 127
stubber.rst.output_dict
    module, 128
stubber.rst.report_return
    module, 132
stubber.rst.rst_utils
    module, 132
stubber.stubber
    module, 164
stubber.stubs_from_docs
    module, 164
stubber.tools
    module, 141
stubber.tools.manifestfile
    module, 141
stubber.tools.pyboard
    module, 143
stubber.update_fallback
    module, 168
stubber.update_module_list
    module, 169
stubber.utils
    module, 146
stubber.utils.config
    module, 146
stubber.utils.makeversionhdr
    module, 148
stubber.utils.manifest
    module, 148
stubber.utils.my_version
    module, 150
stubber.utils.post
    module, 150
stubber.utils.repos
    module, 151
stubber.utils.stubmaker
    module, 151
stubber.utils.typed_config_toml
    module, 152
stubber.utils.versions
    module, 153
stubber_cli() (in module stubber.commands.cli), 104
stubber-build command line option
    -V, 7
    --Version, 7
    --board, 7
    --clean, 7
    --family, 7
    --port, 7
    --version, 7
    -b, 7
    -p, 7
    stubber-clone command line option
        --add-stubs, 8
        --no-stubs, 8
        --path, 8
        -p, 8
    stubber-enrich command line option
        --diff, 8
        --docstubs, 8
        --dry-run, 8
        --stubs, 8
        -ds, 8
        -s, 8
    stubber-get-core command line option
        --black, 9
        --no-black, 9
        --no-pyi, 9
        --pyi, 9
        --stub-folder, 9
        -stubs, 9
    stubber-get-docstubs command line option
        --black, 9
        --family, 9
        --no-black, 9
        --path, 9
        --stub-folder, 9
        --stub-path, 9
        -b, 9
        -f, 9
        -nb, 9
        -p, 9
    stubber-get-frozen command line option
        --black, 10
        --no-black, 10
        --no-pyi, 10
        --pyi, 10
        --stub-folder, 10
        --tag, 10
        --version, 10
        -stubs, 10
    stubber-get-lobo command line option
        --black, 11
        --no-black, 11
        --no-pyi, 10
        --pyi, 10
        --stub-folder, 10
        -stubs, 10
    stubber-merge command line option
        -V, 11
```

--Version, 11
 --family, 11
 --version, 11
stubber-minify command line option
 --all, 12
 --compile, 12
 --diff, 11
 --no-report, 12
 --report, 12
 --source, 11
 --target, 11
 -a, 12
 -c, 12
 -d, 11
 -s, 11
 -t, 11
 -xc, 12
stubber-publish command line option
 -V, 12
 --Version, 12
 --board, 12
 --clean, 13
 --dry-run, 12
 --family, 12
 --force, 12
 --port, 12
 --pypi, 12
 --test-pypi, 12
 --version, 12
 -b, 12
 -p, 12
stubber-stub command line option
 --source, 13
 -s, 13
stubber-switch command line option
 --path, 13
 -p, 13
 TAG, 14
stubber-update-fallback command line option
 --stub-folder, 14
 --version, 14
StubberConfig (*class in stubber.utils.config*), 147
STUBGEN_OPT (*in module stubber.utils.stubmaker*), 152
StubPackage (*class in stubber.publish.stubpacker*), 124
StubSource (*class in stubber.publish.enums*), 119
StubTypingCollector (*class in stubber.cst_transformer*), 159
subfolder_names() (*in module stubber.publish.candidates*), 116
switch() (*in module stubber.utils/repos*), 151
switch_branch() (*in module stubber.basicgit*), 157
switch_tag() (*in module stubber.basicgit*), 157
synch_submodules() (*in module stubber.basicgit*), 157

T

TAG
 stubber-switch command line option, 14
 target (*stubber.stubs_from_docs.RSTReader attribute*), 166
TelnetToSerial (*class in stubber.tools.pyboard*), 144
template_path (*stubber.utils.config.StubberConfig attribute*), 147
to_dict() (*stubber.publish.stubpacker.StubPackage method*), 125
toml_path (*stubber.publish.stubpacker.StubPackage property*), 125
TomlConfigSource (*class in stubber.utils.typed_config_toml*), 152
TransformError, 159
TypeInfo (*class in stubber.cst_transformer*), 159
TYPING_IMPORT (*in module stubber.rst*), 140
TYPING_IMPORT (*in module stubber.rst.rst_utils*), 133

U

U_MODULES (*in module stubber.rst*), 136
U_MODULES (*in module stubber.rst.lookup*), 128
update_def_docstr() (*in module stubber.cst_transformer*), 160
update_fallback() (*in module stubber.update_fallback*), 169
update_hashes() (*stubber.publish.stubpacker.StubPackage method*), 126
update_included_stubs() (*stubber.publish.stubpacker.StubPackage method*), 126
update_module_docstr() (*in module stubber.cst_transformer*), 160
update_package_files() (*stubber.publish.stubpacker.StubPackage method*), 125

V

V_LATEST (*in module stubber.publish.candidates*), 116
verbose (*stubber.stubs_from_docs.RSTReader attribute*), 166
version_candidates() (*in module stubber.publish.candidates*), 116
VERSION_LIST (*in module stubber.commands.switch_cmd*), 110
visit_ClassDef() (*stubber.codemod.merge_docstub.MergeCommand method*), 103
visit_ClassDef() (*stubber.cst_transformer.StubTypingCollector method*), 159
visit_Comment() (*stubber.codemod.add_comment.AddComment*

```
    method), 101
visit_FunctionDef()           (stub-
    ber.codemod.merge_docstub.MergeCommand
    method), 103
visit_FunctionDef()           (stub-
    ber.cst_transformer.StubTypingCollector
    method), 160
visit_Module()                (stub-
    ber.cst_transformer.StubTypingCollector
    method), 159
```

W

```
write()  (stubber.tools.pyboard.ProcessPtyToTerminal
          method), 145
write()  (stubber.tools.pyboard.ProcessToSerial
          method), 145
write()  (stubber.tools.pyboard.TelnetToSerial method),
          144
write_file()  (stubber.stubs_from_docs.RSTReader
               method), 166
write_object_stub()  (createstubs.Stubber
                      method), 92
write_object_stub()  (createstubs_db.Stubber
                      method), 95
write_object_stub()  (createstubs_mem.Stubber
                      method), 98
write_package_json()  (stub-
                      ber.publish.stubpacker.StubPackage
                      method), 126
```